

The products listed in this catalog are correct as of 1.1.2013. Adaptations to technology and design may occur at any time. The suitability of the faucets must be checked for each individual project. KWC AG's specifications, installation and service instructions are definitive for planning and technical implementation. The relevant information can be ordered from KWC or obtained at www.kwc.com.

Faucets for the kitchen 9

KWC SAROS	10
KWC AVA	12
KWC LIVELLO	16
KWC ONO	18
KWC ONO touch light PRO	27
KWC EVE	35
KWC INOX	38
KWC SIN	41
KWC LUNA	43
KWC DOMO	44
KWC VITA PRO	47
KWC USO	49
KWC BLISS	50
KWC ORCINO	53
KWC STAR	55
KWC SYSTEMA	57
KWC Soap and lotion dispensers	62

Faucets for the commercial kitchen 65

KWC GASTRO	66
------------	----

Faucets for the bath 95

KWC AVA	96
KWC ONO	109
KWC ONO touch light PRO	123
KWC DOMO	137
KWC VITA	146
KWC VITA PRO	151
KWC USO	158
KWC VAROX	159

ShowerCulture 161

KWC BOSSANOVA	162
KWC ELY	165
KWC Shower heads	167
KWC Shower arms	170
KWC Shower systems	174
KWC Shower brackets	182
KWC Sliding wall bars	183
KWC Sliding wall bar kits	184
KWC Hose connections	186
KWC Shower hoses	188

Automatic faucets 191

KWC LIDAR	192
KWC TRONIC	194
KWC IQUA	195

KWC Index	198
-----------	-----

General conditions of sale and delivery	201
---	-----





KWC draws on its long company tradition to ensure that its Swiss quality products make a splash right around the world. Developed and manufactured in Unterkulm in Switzerland's Canton of Aargau, the products are exported to over 50 countries.

Aesthetics

The extraordinarily elegant design of KWC products raises the experience of handling water to a new level. These exclusively processed faucets create a refined atmosphere in any kitchen or bathroom.

Functionality

Our many years of experience and the continuous ongoing development of our products give them a unique functionality. We also integrate new technologies to achieve hitherto undreamt-of improvements in the way they work.

Ecology

KWC is aware of its environmental responsibilities. We regard the concept of sustainability as a great challenge and incorporate it into everything we do. Thanks to innovative technical features, our products significantly reduce the consumption of water and energy.



KWC is certified in the following areas

ISO 9001 Quality management systems
ISO 14001 Environmental management systems
OHSAS 18001 Occupational health and safety management systems

www.kwc.com

SCHWEIZ
deutsch
français
italiano

BENELUX
nederlands
français

MOBILE VERSION
KWC Mobile

DEUTSCHLAND
deutsch

AUSTRIA
deutsch

INTERNATIONAL
english
español

ITALIA
italiano

KWC AMERICA
english

Welcome to KWC

Kitchen and Bathroom faucets.



KWC Online


Get to know KWC quickly, easily and online – on the computer or via your mobile phone. At www.kwc.com, you can find comprehensive information about the company and the range of products. In addition, you can find useful tips relating to our services, read the latest information and press reports plus find all the important contact details. KWC is looking forward to your visit.



On the KWC home page you can find comprehensive information about KWC's products categorised according to business sectors and areas of use.

Overview of the product line

Atmospheric photos and a clear description of the whole range of the product line on one page.

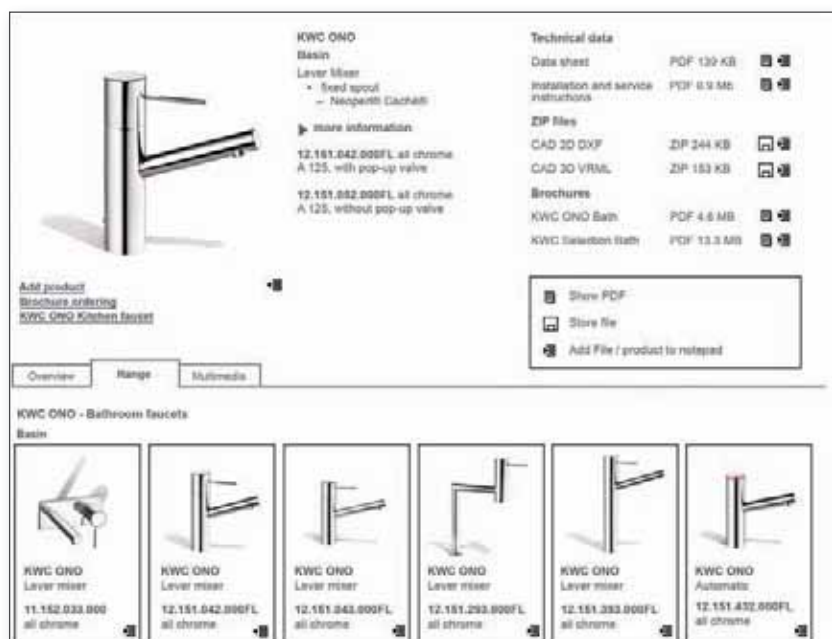

Item description

Clear description of the individual KWC product lines. In the "Range" section you will find the individual products including a data service which provides a data sheet (PDF), installation and service instructions (PDF) as well as useful information on CAD planning data (download as a ZIP file). Also available are printed promotional materials such as catalogues and brochures (PDF).

Favourites/shopping basket

Using the practical "my Notepad" function, your items can be stored and called up again at any time by clicking "my Notepad" (in the top right-hand corner of the main navigation screen). The details gathered in this way can then be viewed individually (PDF), stored, downloaded as a ZIP file or deleted.

PDF catalogue

Using the "Favourites" tool, you can produce an individualised PDF catalogue with the faucet lines and details of your choice.

- Choice of titles for the PDF catalogue
- Detailed PDF menu
- Display of atmospheric images and range of the marked items
- Display of marked items with tender text
- Linking of the product lines and items from the PDF to the website



KWC Mobile

Via mobile.kwc.ch, you can access a KWC website optimised for mobile phones.

The most important functions:

- Overview of the range: all the KWC faucet lines for kitchens and bathrooms
- Product line description: overall view of a KWC faucet line
- Item description: individual products together with tender text
- Shopping basket function
- PDF data sheet with technical specifications and dimensions
- Installation and service instructions

Swiss technology

LUMINAQUA®

Advanced Light Technology



Fine light-emitting diodes transform water into liquid plasma. Just the press of a button – and the play of light begins.

highflex®

extended water system



Patented functionality: a highly flexible spring-loaded hose that can be moved in any direction and that keeps its shape beautifully at all times when not in use.

COLORFLOW

Real-time temperature in colour



Precise, continuous reflection of the water temperature thanks to LED technology. Colorflow offers a unique experience for the operator and forms a striking backdrop for the lever.

PURETEC

Contact-free water



Contact-free control: the radiation-free DDSA® sensor technology sets the water flowing as soon as your hand is within 5–7 cm of the faucet.

TIPCONTROL

Three levels, three colours



Minimum-contact control of the water temperature thanks to DDSA® sensor technology. Just a brief touch is enough: once for cold (blue), twice for warm (orange), three times for hot (red) – and to clean (green), press for five seconds.

COOLFIX

smart energy saver



In its basic position, the operating lever is in the cold water range. Hot water flows only when it is pivoted to the left.

Group	L _{ap} in dB(A)
I	≤ 20
II	> 20 ≤ 30
U (not classified)	> 30

Faucet acoustic groups

Faucets are classified by noise level. Faucets in Group I have a particularly low noise level of ≤ 20 dB(A).

JETCLEAN



Flexible faceplate for kitchen sprays and shower heads. The cone-shaped holes expand during use, dislodging any lime-scale deposits from the surface of the faceplate. The holes contract automatically when the water flow is switched off.




Turn And Clean. The faceplate on kitchen sprays can be dismantled and cleaned without tools.



Turn And Lock. The spray diverter on kitchen sprays can be fixed in place with a simple twist.

touchControl

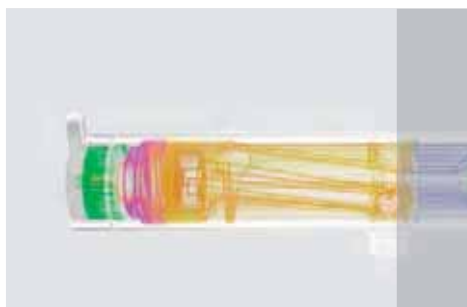

Protection against scalding: insulated hot water pipes ensure that the body of the faucet only becomes warm at most, and never hot.

smartControl



Tangible resistance in the turning handle to control flow limits the amount of outflowing water. To leave the economy mode, twist the turning handle back past the catch point.

hotControl




Temperatures above 38 °C can only be set once the safety button on the temperature selector handle has been pressed. This prevents scalding from contact with hot water.



KWC Faucets for the kitchen

Faucets for the kitchen

KWC SAROS	10
KWC AVA	12
KWC LIVELLO	16
KWC ONO	18
KWC ONO touch light PRO	27
KWC EVE	35
KWC INOX	38
KWC SIN	41
KWC LUNA	43
KWC DOMO	44
KWC VITA PRO	47
KWC USO	49
KWC BLISS	50
KWC ORCINO	53
KWC STAR	55
KWC SYSTEMA	57
KWC Soap and lotion dispensers	62

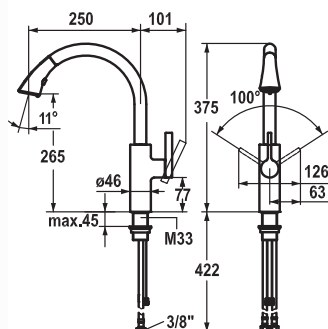


KWC-No.

Finish

10.181.003.000FL

all chrome

A 250, flexible connection hoses



KWC-No.

Finish

10.181.002.000FL

all chrome

A 180, flexible connection hoses

Kitchen













Lever mixer


- lever installation possible on the right or left side
 - Child safety: cold water setting towards the front (operation on the right side)
- gap between wall and centre of mounting hole min. 65 mm
- spray - magnetic tight-fit holder
 - ergonomic spout alignment, shape and handling
 - KWC JETCLEAN technology
 - Neoperl® cascade®
 - automatic diverter reset
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Kitchen

Lever mixer

- lever installation possible on the right or left side
 - Child safety: cold water setting towards the front (operation on the right side)
- gap between wall and centre of mounting hole min. 65 mm
- spray - magnetic tight-fit holder
 - ergonomic spout alignment, shape and handling
 - KWC JETCLEAN technology
 - Neoperl® cascade®
 - automatic diverter reset
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm



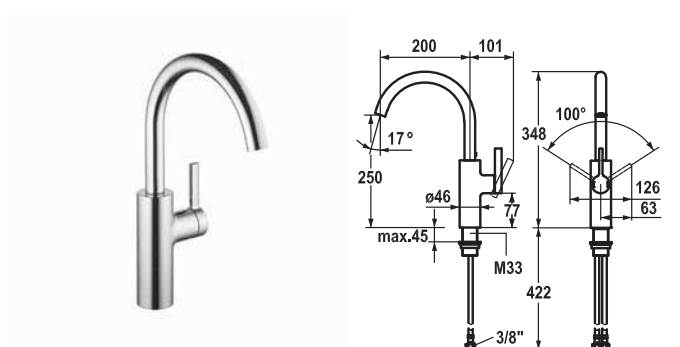








KWC-No. **10.181.012.000FL** Finish all chrome
A 200, flexible connection hoses

Kitchen

Lever mixer

- lever installation possible on the right or left side
 - Child safety: cold water setting towards the front (operation on the right side)
- gap between wall and centre of mounting hole min. 65 mm
- swivel spout 160°
 - Neoperl®ac hé®
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I

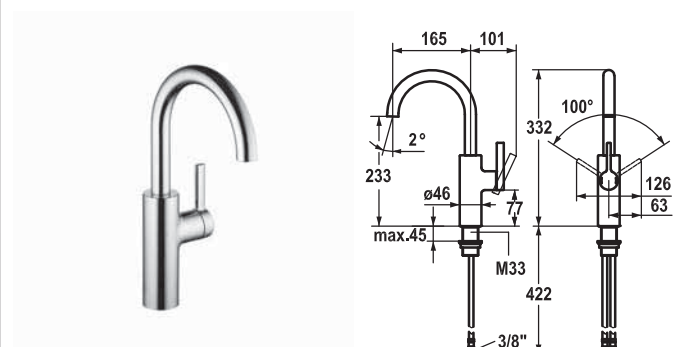







KWC-No. **10.181.992.000FL** Finish all chrome
A 165, flexible connection hoses



Kitchen

Lever mixer

- lever installation possible on the right or left side
 - Child safety: cold water setting towards the front (operation on the right side)
- gap between wall and centre of mounting hole min. 65 mm
- swivel spout 160°
 - Neoperl®ac hé®
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I





KWC-No.

Finish

10.191.003.000FL

all chrome

A 205, flexible connection hoses

KWC-No.

Finish

10.191.103.000FL

all chrome

A 205, flexible connection hoses

Kitchen







Lever mixer

- lever installation possible on the right or left side
- pull-out spray with KWC JETCLEAN
 - up to 600 mm pull-out length
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate normal spray 9 l/min (3 bar)

Flow rate needle spray 10 l/min (3 bar)

Acoustic group I








Kitchen


Lever mixer

- lever installation possible on the right or left side
- pull-out aerator
 - Neoperl®ac hé®
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 9 l/min (3 bar)

Acoustic group I





Finish

all chrome

A 210, flexible connection hoses



Lever mixer


Lever mixer

- pull-out aerator
 - Neoperl® aerator
 - up to 700 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size $\varnothing 35$ mm

Flow rate 9 l/min (3 bar)

Acoustic group I





KWC-No.

Finish

11.192.033.000

all chrome

A 175, Trim kit

11.192.034.000

all chrome






A 225, Trim kit

Kitchen Basin

Lever mixer

- fixed spout
 - Neoperl®ac hé®
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- To be ordered separately:
 - unit for concealed installation ½" 39.193.400.931
 - (if necessary) extension set 20 mm Z.536.333

Flow rate 7.5 l/min (3 bar)
Acoustic group I

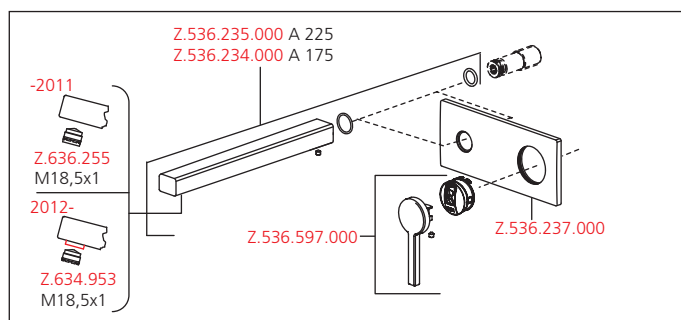

KWC-No.

Finish


39.193.400.931


Concealed

Accessories: technology and installation

Concealed unit wall two hole

- connecting thread ½"
- Suitable for:
 - KW VA





KWC-No.

Finish

10.231.013.000FL

all chrome








A 225, flexible connection hoses

Kitchen

Lever mixer

- lever installation possible on the right or left side
- swivel spout 160°
 - Neoperl® Caché®
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 11 l/min (3 bar)
Acoustic group I

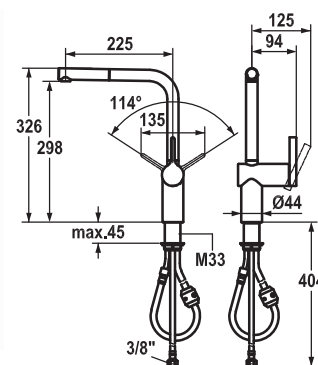

KWC-No.

Finish

10.231.103.000FL

all chrome









A 225, flexible connection hoses


Kitchen

Lever mixer

- lever installation possible on the right or left side
- pull-out aerator
 - Neoperl® Caché®
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 10 l/min (3 bar)
Acoustic group I



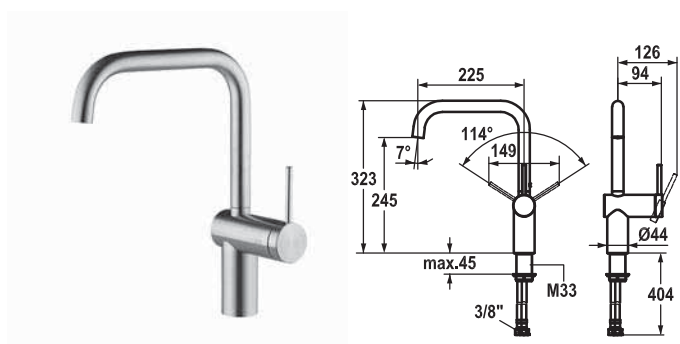

KWC-No.

Finish

10.231.013.700FL








A 225, flexible connection hoses

Kitchen

Lever mixer

- lever installation possible on the right or left side
- swivel spout 160°
 - Neoperl® caché®
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 11 l/min (3 bar)
Acoustic group I

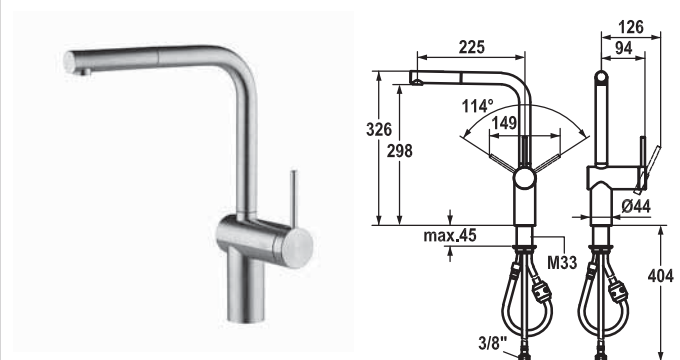

KWC-No.

Finish

10.231.103.700FL









A 225, flexible connection hoses


Kitchen

Lever mixer

- lever installation possible on the right or left side
- pull-out aerator
 - Neoperl® caché®
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 10 l/min (3 bar)
Acoustic group I



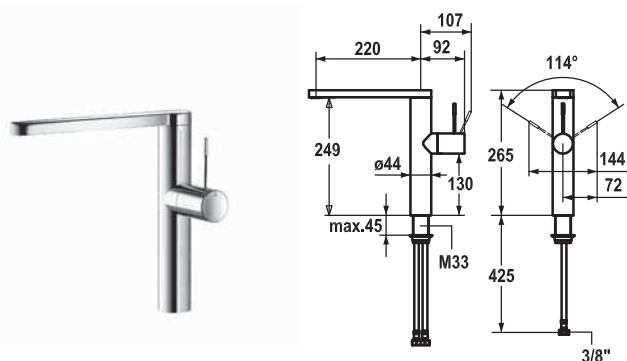

KWC-No. **10.151.413.000FL** Finish all chrome
A 220, flexible connection hoses







10.151.413.700FL
A 220, flexible connection hoses

Kitchen

Lever mixer

- lever installation possible on the right or left side
- surgical-grade hardened stainless steel lever
- swivel spout 360°
 - Neoperl® LIM ®
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size 435 mm

Flow rate 11 l/min (3 bar)
Acoustic group I

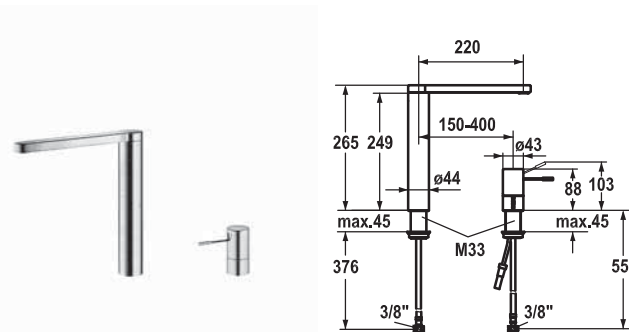







KWC-No. **10.152.413.000FL** Finish all chrome
A 220, flexible connection hoses


Kitchen

Lever mixer

- 2-hole
- lever installation possible on the right or left side
- swivel spout 360°
 - Neoperl® LIM ®
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size 435 mm

Flow rate 12 l/min (3 bar)
Acoustic group I



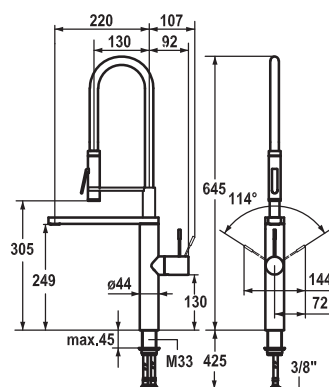









KWC-No.	Finish
10.151.423.000FL	all chrome
A 220, flexible connection hoses	
10.151.423.700FL	
A 220, flexible connection hoses	


Kitchen

Lever mixer

- highflex® patented spring hose technology
- lever installation possible on the right or left side
- surgical-grade hardened stainless steel lever
- integrated vacuum diversion
- swivel spout 360°
 - Neoperl® LIM®
- professional spray 360° turn
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size 35 mm
- Scope of delivery:
 - spray holder Z.535.963

Flow rate 10 l/min (3 bar)
Acoustic group I
Spray: Flow rate 3 l/min (3 bar)



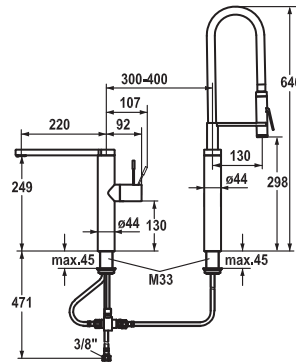










KWC-No. **10.152.423.000FL** Finish all chrome
A 220, flexible connection hoses


Kitchen

Lever mixer

- highflex® patented spring hose technology
- 2-hole
- lever installation possible on the right or left side
- integrated vacuum diversion
- swivel spout 360°
 - Neoperl® LIM®
- professional spray 360° turn
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm
- Scope of delivery:
 - spray holder Z.535.963

Flow rate 8 l/min (3 bar)
Acoustic group I
Spray: Flow rate 3 l/min (3 bar)

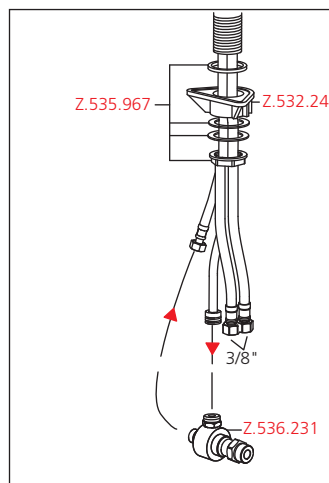

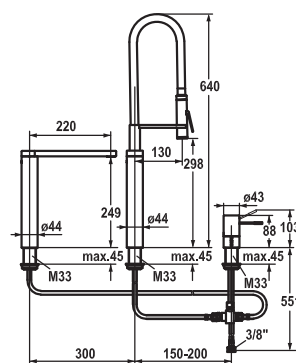

KWC-No.

Finish

10.153.423.000FL

all chrome

A 220, flexible connection hoses

Kitchen












Lever mixer


- lever mixer
- highflex® patented spring hose technology
- 3-hole
- lever installation possible on the right or left side
- integrated vacuum diversion
- swivel spout 360°
 - Neoperl® LIM ®
- professional spray 360° turn
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses ¾"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm
- Scope of delivery:
 - spray holder Z.535.963

Flow rate 8 l/min (3 bar)

Acoustic group I

Spray: Flow rate 3 l/min (3 bar)

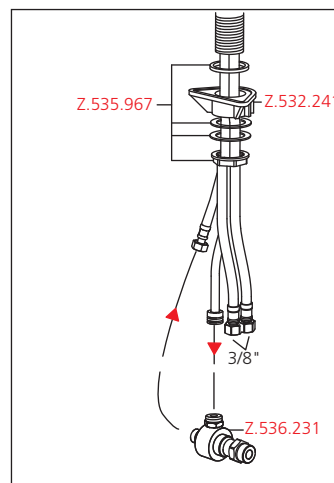



KWC-No.

Finish

10.151.013.000FL

all chrome










A 225, flexible connection hoses

Kitchen

Lever mixer

- lever installation possible on the right or left side
- swivel spout 360°
 - Neoperl®ac hé®
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm
- To be ordered separately:
 - (if necessary) short lever, L 70 mm Z.535.995

Flow rate 12 l/min (3 bar)
Acoustic group I

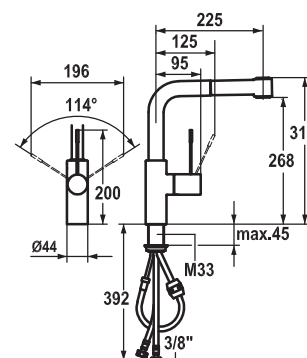

KWC-No.

Finish

10.151.003.000FL

all chrome









A 225, flexible connection hoses


Kitchen

Lever mixer

- lever installation possible on the right or left side
- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm
- To be ordered separately:
 - (if necessary) short lever, L 70 mm Z.535.995

Flow rate normal spray 12 l/min (3 bar)
Flow rate needle spray 13 l/min (3 bar)
Acoustic group I



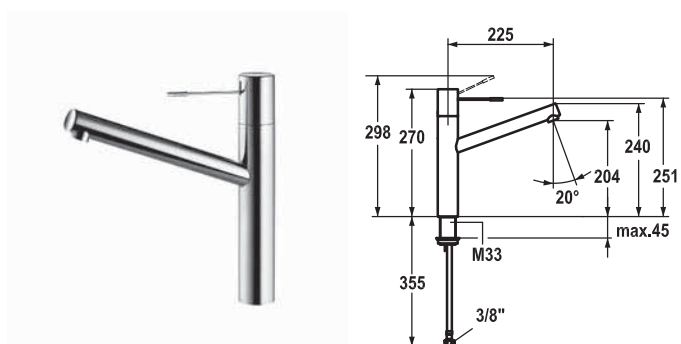

KWC-No. **10.151.023.000FL** all chrome
A 225, flexible connection hoses








10.151.023.700FL
A 225, flexible connection hoses

Kitchen

Lever mixer

- swivel spout 270°
 - Neoperl®ac hé®
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I

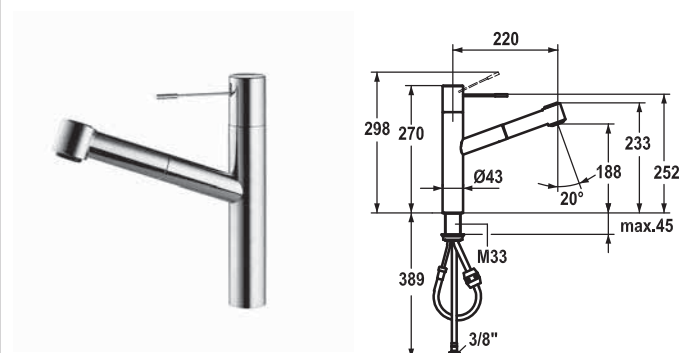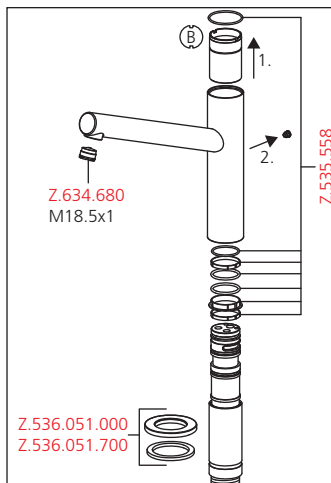

KWC-No. **10.151.033.000FL** all chrome
A 220, flexible connection hoses








10.151.033.700FL
A 220, flexible connection hoses


Kitchen

Lever mixer

- surgical-grade hardened stainless steel lever
- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 105°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate normal spray 12 l/min (3 bar)
Flow rate needle spray 13 l/min (3 bar)
Acoustic group I

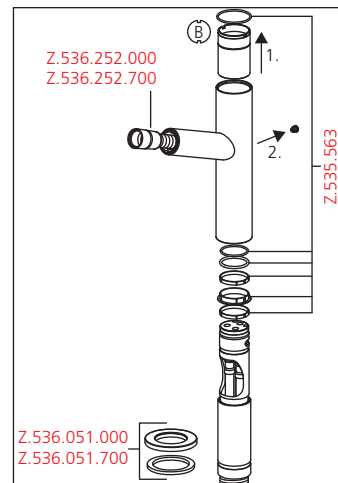



KWC-No. **10.151.113.000FL** Finish all chrome

A 225, flexible connection hoses

10.151.113.700FL









A 225, flexible connection hoses

Kitchen

Lever mixer

- surgical-grade hardened stainless steel lever
- pull-out aerator
 - Neoperl® cascade®
 - up to 700 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 105°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate 10 l/min (3 bar)
Acoustic group I

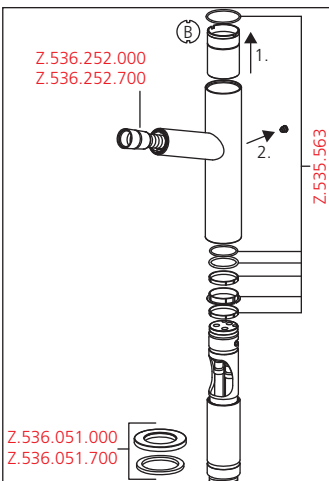

KWC-No. **10.151.102.000FL** Finish all chrome

A 200, flexible connection hoses

10.151.102.700FL









A 200, flexible connection hoses


Kitchen

Lever mixer

- lever installation possible on the right or left side
- surgical-grade hardened stainless steel lever
- pull-out aerator covered
 - Neoperl® cascade®
 - up to 700 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm
- To be ordered separately:
 - (if necessary) short lever, L 70 mm Z.535.995

Flow rate 10 l/min (3 bar)
Acoustic group I





KWC-No.

Finish

10.152.322.000FL

all chrome








A 200, flexible connection hoses


Kitchen

Lever mixer

- 2-hole
- lever installation possible on the right or left side
- pull-out aerator covered
 - Neoperl®ac hé®
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 10 l/min (3 bar)
Acoustic group I





KWC-No.

Finish

11.152.033.000

all chrome

A 175, Trim kit

11.152.034.000

all chrome






A 225, Trim kit

Kitchen Basin

Lever mixer

- fixed spout
 - Neoperl® Caché®
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- To be ordered separately:
 - unit for concealed installation 1/2" 39.151.400.931
 - (if necessary) extension set 20 mm Z.536.333

Flow rate 7.5 l/min (3 bar)
Acoustic group I

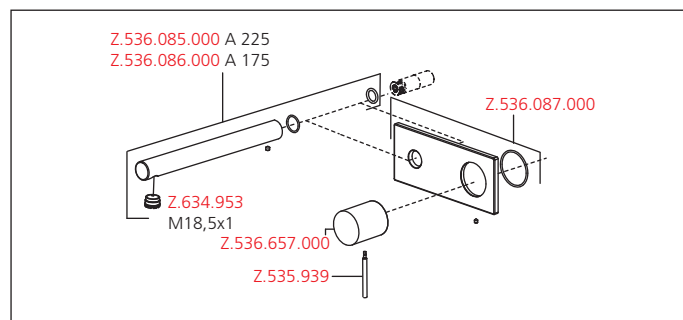

KWC-No.

Finish


39.151.400.931


Concealed

Accessories: technology and installation

Concealed unit wall two hole

- connecting thread 1/2"
- Suitable for:
 - KWC ONO



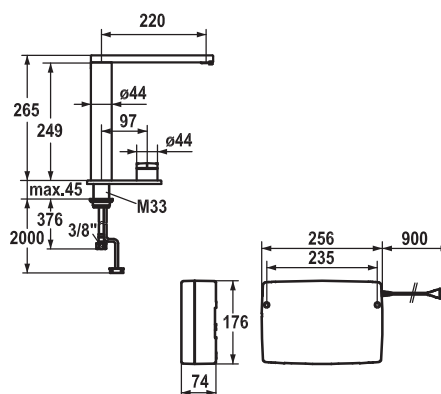

KWC-No. **10.651.022.000FL** Finish all chrome
A 220, flexible connection hoses, mains receiver

Kitchen with LED-technology


Electronic controlled

- touch light PRO technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- microprocessor-control
 - tip'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- swivel spout 360°
 - Neoperl® LIM ®
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Scope of delivery:

- mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
- control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - (if necessary) extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 12 l/min (3 bar)
Acoustic group I

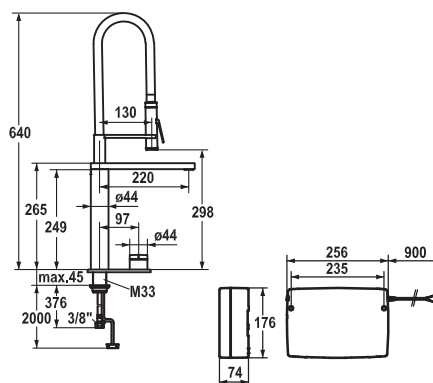

KWC-No. **10.651.122.000FL** Finish all chrome
A 220, flexible connection hoses, mains receiver


Kitchen with LED-technology

Electronic controlled

- touch light PRO technology
- highflex® patented spring hose technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- microprocessor-control
 - tip'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- swivel spout 360°
 - Neoperl® LIM ®
- professional spray 360° turn
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

- Scope of delivery:
 - mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
 - control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - (if necessary) extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 12 l/min (3 bar)
Acoustic group I
Spray: Flow rate 4 l/min (3 bar)

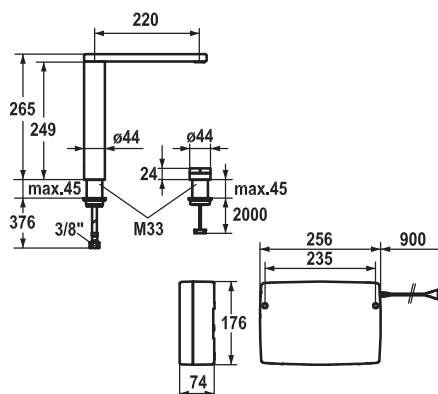

KWC-No. **10.652.012.000FL** Finish all chrome
A 220, flexible connection hoses, mains receiver

Kitchen with LED-technology


Electronic controlled

- touch light PRO technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- 2-hole
- microprocessor-control
 - tip'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- swivel spout 360°
 - Neoperl® L IM®
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Scope of delivery:

- mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
- control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - (if necessary) extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 12 l/min (3 bar)
Acoustic group I

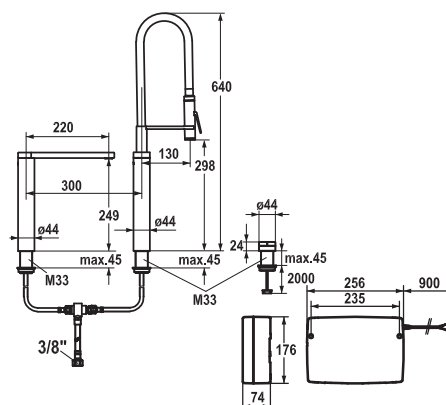

KWC-No. **10.653.112.000FL** Finish all chrome
A 220, flexible connection hoses, mains receiver


Kitchen with LED-technology

Electronic controlled

- touch light PRO technology
- highflex® patented spring hose technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- 3-hole
- microprocessor-control
 - tip'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- swivel spout 360°
 - Neoperl® LIM ®
- professional spray 360° turn
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

- Scope of delivery:
 - mains receiver 100-240 V / operating voltage / cable length 900 mm
 - control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - (if necessary) extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 9 l/min (3 bar)
Acoustic group I
Spray: Flow rate 4 l/min (3 bar)

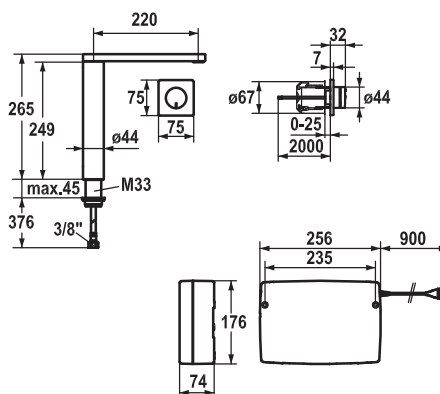

KWC-No. **10.651.032.000FL** Finish all chrome
A 220, flexible connection hoses, mains receiver


Kitchen with LED-technology

Electronic controlled

- touch light PRO technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- microprocessor-control
 - tip'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- swivel spout 360°
 - Neoperl® LIM ®
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

- Scope of delivery:
 - mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
 - control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - (if necessary) extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
 - rough in for operating unit Z.636.183
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 12 l/min (3 bar)
Acoustic group I

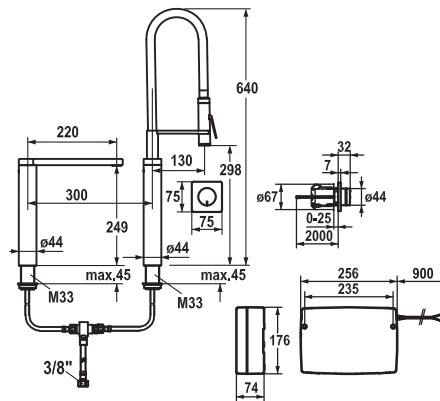

KWC-No. **10.652.132.000FL** Finish all chrome
A 220, flexible connection hoses, mains receiver

Kitchen with LED-technology


Electronic controlled

- touch light PRO technology
- highflex® patented spring hose technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- 2-hole
- microprocessor-control
 - tip'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- swivel spout 360°
 - Neoperl® LIM ®
- professional spray 360° turn
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Scope of delivery:

- mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
- control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - (if necessary) extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
 - rough in for operating unit Z.636.183
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 9 l/min (3 bar)
Acoustic group I
Spray: Flow rate 4 l/min (3 bar)

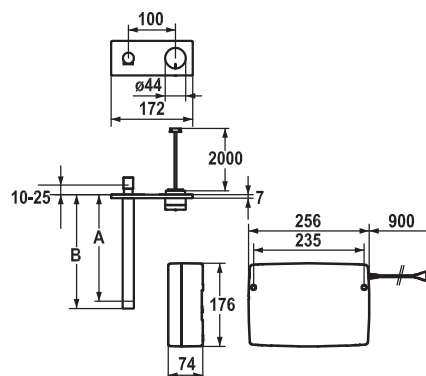

KWC-No.	Finish
11.654.003.000	all chrome
A 175, mains receiver, Trim kit	
11.654.004.000	all chrome
A 225, mains receiver, Trim kit	


Kitchen Basin with LED-technology

Electronic controlled

- touch light PRO technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- microprocessor-control
 - tip'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- fixed spout
 - Neoperl® LIM ®
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- connecting thread 1/2"
- flexible connection hoses 3/8"

- Scope of delivery:
 - mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
 - control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - unit for concealed installation 39.004.500.931
 - (if necessary) extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 12 l/min (3 bar)
Acoustic group I



KWC-No.

Finish


39.004.500.931

Concealed

Accessories: technology and installation

Concealed unit wall two hole

- connecting thread 1/2"



KWC-No.

Finish

Z.536.351.000

mains receiver

all chrome

Additional accessories, with LED-technology

KWC ONO touch light PRO wireless operating unit, with charging station

- rechargeable battery life 3-4 months

▪ Scope of delivery:

- mains receiver 100-240 V / operating voltage 6.75 V / cable length 800 mm



KWC-No.

Finish


Z.636.183

Concealed

Accessories: technology and installation

Rough in for touch light PRO operating unit, plastic

- suitable for installation on brickwork or cavity walls



KWC-No.

Finish

10.121.103.000FL

all chrome

A 225, flexible connection hoses, mains receiver

10.121.103.700FL

stainless steel





A 225, flexible connection hoses, mains receiver

Kitchen with LUMINAQUA® LED-technology

Lever mixer

- lever installation possible on the right or left side
- pull-out aerator covered
 - Neoperl®ac hé®
 - integrated ON/OFF push-button with automatic shut-off after 45 minutes
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 270°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm
- Scope of delivery:
 - mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate 10 l/min (3 bar)
Acoustic group I



KWC-No.

Finish

10.121.102.000FL

all chrome

A 190, flexible connection hoses, mains receiver

10.121.102.700FL

stainless steel







A 190, flexible connection hoses, mains receiver


Kitchen with LUMINAQUA® LED-technology

Lever mixer

- lever installation possible on the right or left side
- pull-out aerator covered
 - Neoperl®ac hé®
 - integrated ON/OFF push-button with automatic shut-off after 45 minutes
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 270°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm
- Scope of delivery:
 - mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate 10 l/min (3 bar)
Acoustic group I





KWC-No.

Finish

10.271.023.700FL

stainless steel





A 225, flexible connection hoses

Kitchen

Lever mixer

- swivel spout 160°
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I



KWC-No.

Finish

10.271.033.700FL

stainless steel

A 235, flexible connection hoses

10.271.033.736FL

stainless steel/matte black





A 235, flexible connection hoses


Kitchen

Lever mixer

- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - with lockable needle spray
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate normal spray 12 l/min (3 bar)
Flow rate needle spray 13 l/min (3 bar)
Acoustic group I



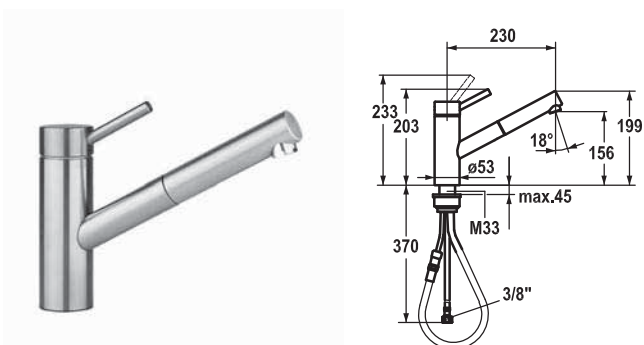

KWC-No.

Finish

10.271.103.700FL

stainless steel







A 230, flexible connection hoses

Kitchen

Lever mixer

- pull-out aerator
 - Neoperl® cascade®
 - up to 700 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size $\varnothing 35$ mm

Flow rate 12 l/min (3 bar)
Acoustic group I

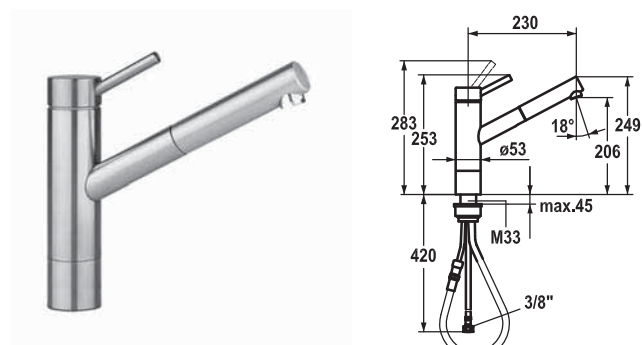

KWC-No.

Finish

10.271.303.700FL

stainless steel






A 230, flexible connection hoses


Kitchen

Lever mixer

- socket 50 mm
- pull-out aerator
 - Neoperl® cascade®
 - up to 700 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size \varnothing 35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I





KWC-No.

Finish

10.272.123.700FL

stainless steel










A 200, flexible connection hoses, mains receiver


Kitchen with LUMINAQUA® LED-technology

Lever mixer

- 2-hole
- lever installation possible on the right or left side
- pull-out aerator covered
 - Neoperl®ac hé®
 - integrated ON/OFF push-button with automatic shut-off after 45 minutes
 - up to 500 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm
- Scope of delivery:
 - mains receiver 100-240 V / operating voltage 6.5 V / cable length 1100 mm

Flow rate 11 l/min (3 bar)
Acoustic group I





KWC-No.

Finish

10.261.432.000FL

all chrome

A 200, flexible connection hoses

Kitchen









Lever mixer

- highflex® patented spring hose technology
- lever installation possible on the right or left side
- spray 360° turn
 - KWC JETCLEAN technology
 - Neoperl®ac hé®
 - automatic diverter reset
 - hose surface to fit faucet surface
- swivel spout 360°
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate normal spray 8 l/min (3 bar)

Flow rate needle spray 6 l/min (3 bar)

Acoustic group I

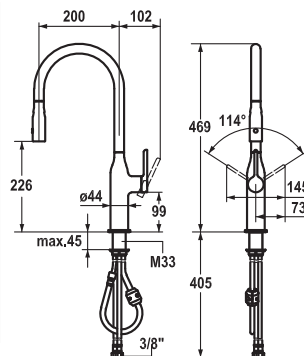

KWC-No.

Finish

10.261.002.000FL

all chrome

A 200, flexible connection hoses

Kitchen








Lever mixer


- lever installation possible on the right or left side
- spray 360° turn
 - KWC JETCLEAN technology
 - Neoperl®ac hé®
 - automatic diverter reset
 - up to 500 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate normal spray 7 l/min (3 bar)

Flow rate needle spray 6 l/min (3 bar)

Acoustic group I





KWC-No.

Finish

10.261.102.000FL

all chrome



A 200, flexible connection hoses

Kitchen

Lever mixer

- lever installation possible on the right or left side
- pull-out aerator covered
 - Neoperl®ac hé®
 - up to 500 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 8 l/min (3 bar)
Acoustic group I



KWC-No.

Finish

10.261.012.000FL

all chrome








A 200, flexible connection hoses


Kitchen

Lever mixer

- lever installation possible on the right or left side
- swivel spout 160°
 - Neoperl®ac hé®
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I



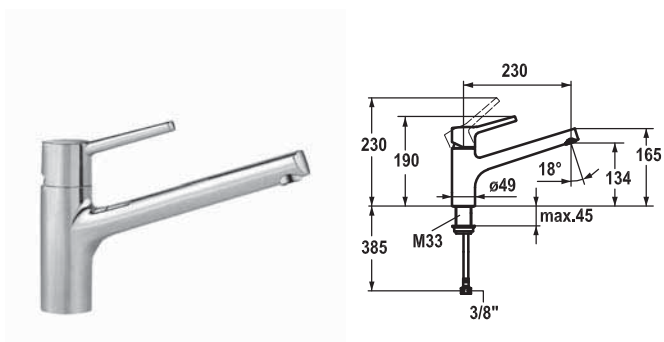

KWC-No.

Finish

10.211.023.000FL

all chrome






A 230, flexible connection hoses

Kitchen

Lever mixer

- swivel spout 160°
 - Neoperl® cascade®
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hose ¾"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I

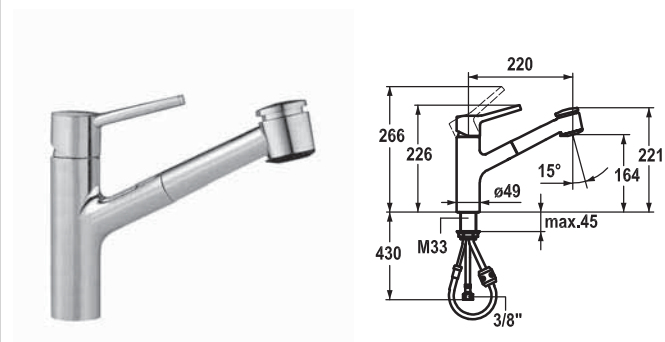

KWC-No.

Finish

10.211.033.000FL

all chrome






A 220, flexible connection hoses


Kitchen

Lever mixer

- pull-out spray with KWC JETCLEAN
 - up to 600 mm pull-out length
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size $\varnothing 35$ mm

Flow rate normal spray 12 l/min (3 bar)
Flow rate needle spray 11 l/min (3 bar)
Acoustic group I





KWC-No.

10.061.023.000FL

A 225, flexible connection hoses

Finish






all chrome

Kitchen

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- swivel spout 160°
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I



KWC-No.

10.061.043.000FL

A 225, flexible connection hoses

Finish

all chrome





Kitchen


for installation below window, detachable

Lever mixer

- detachable for installation below windows - detached 60 mm
- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- swivel spout 150°
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 - 37 mm

Flow rate 12 l/min (3 bar)
Acoustic group I



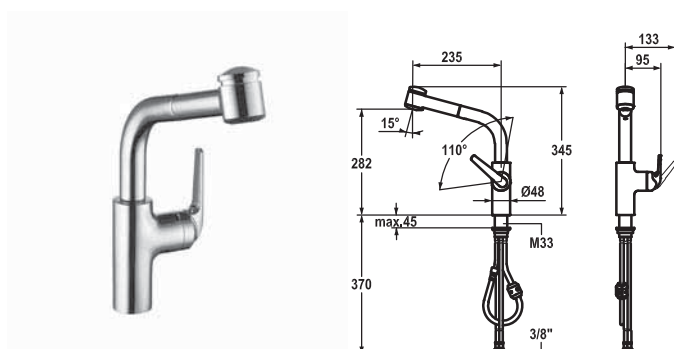







KWC-No. **10.061.003.000FL** Finish all chrome
A 235, flexible connection hoses

Kitchen

Lever mixer

- detachable for installation below windows - detached 130 mm
- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- lever installation only possible on the right side
 - Child safety: cold water setting towards the front (operation on the right side)
- gap between wall and centre of mounting hole min. 25 mm
- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - with lockable needle spray
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate normal spray 12 l/min (3 bar)
Flow rate needle spray 12 l/min (3 bar)
Acoustic group I

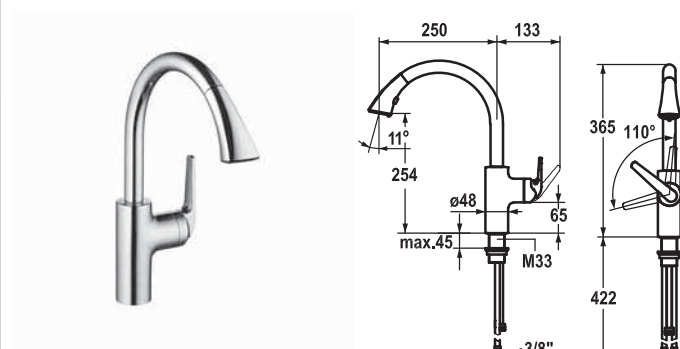







KWC-No. **10.061.004.000FL** Finish all chrome
A 250, flexible connection hoses


Kitchen

Lever mixer


- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- lever installation only possible on the right side
 - Child safety: cold water setting towards the front (operation on the right side)
- gap between wall and centre of mounting hole min. 25 mm
- spray - magnetic tight-fit holder
 - ergonomic spout alignment, shape and handling
 - KWC JETCLEAN technology
 - Neoperl® cascade®
 - automatic diverter reset
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 360°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate normal spray 12 l/min (3 bar)
Flow rate needle spray 12 l/min (3 bar)
Acoustic group I





KWC-No. **10.061.033.000FL** Finish all chrome
A 230, flexible connection hoses



KWC-No. **10.061.053.000FL** Finish all chrome
A 230, flexible connection hoses

Kitchen

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - with lockable needle spray
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm











Kitchen


for installation below window, detachable

Lever mixer

- detachable for installation below windows - detached 60 mm
- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - with lockable needle spray
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 - 37 mm

Flow rate normal spray 12 l/min (3 bar)
Flow rate needle spray 12 l/min (3 bar)
Acoustic group I





KWC-No.

Finish

10.291.023.000FL

all chrome

A 230, flexible connection hoses






Kitchen

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=125 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- swivel spout 160°
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hose 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

10.291.033.000FL

all chrome

A 230, flexible connection hoses

Kitchen






Lever mixer



- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=125 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - with lockable needle spray
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate normal spray 12 l/min (3 bar)

Flow rate needle spray 12 l/min (3 bar)

Acoustic group I





KWC-No.

Finish

10.291.023.000LLFL

all chrome

A 230, flexible connection hoses, with long lever

KWC-No.

Finish

10.291.033.000LLFL

all chrome

A 230, flexible connection hoses, with long lever

Kitchen

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=190 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- swivel spout 160°
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hose 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm










Kitchen


Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=190 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - with lockable needle spray
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)

Acoustic group I














KWC-No.	Finish
12.661.403.700FL	stainless steel
A 155, flexible connection hoses, without pop-up valve, battery	
12.661.403.750FL	polished stainless steel
A 155, flexible connection hoses, without pop-up valve, battery	
12.661.413.700FL	stainless steel
A 155, flexible connection hoses, without pop-up valve, mains receiver	
12.661.413.750FL	polished stainless steel
A 155, flexible connection hoses, without pop-up valve, mains receiver	

Basin low-contact with LUMINAQUA® LED-technology

- Automatic
- DDSA® sensor technology radiation-free
 - touch light
 - regulation by tapping
 - 1 x tapping - cold water, lighting color: blue
 - 2 x tapping - mix water, lighting color: orange
 - 3 x tapping - hot water, lighting color: red
 - 1 x tapping for 5 sec. - cleaning mode, lighting color: green
 - microprocessor-control
 - with cleaning programme
 - duration of water flow - 10 seconds
 - fixed spout
 - Neoperl® SLIM ®
 - valve unit
 - two-way
 - control of three temperature grades
 - temperature limitation
 - water flow not adjustable
 - flexible connection hoses 3/8"
 - fastening by means of threaded sleeve M33 x 1.5
 - mounting hole size ø35 mm
 - Scope of delivery:
 - battery 1.5 V Alkaline AA LR6 (4x)
 - lifespan at 50 circuits/day: 1 year
 - mains receiver 100-240 V / operating voltage 6.5 V / cable length 1100 mm

Flow rate 6 l/min (3 bar)
Acoustic group I






A 230, flexible connection hoses


- swivel spout 360°
 - aerator
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of stud bolt M8 x 1
- mounting hole size $\varnothing 35$ mm

This diagram shows the exploded view of the Z 534.037 and Z 532.241 components. The Z 534.037 is a long, thin vertical rod with a curved bracket at the top and a small cylindrical cap at the bottom. The Z 532.241 is a taller, more complex assembly with a curved bracket at the top, a central vertical rod, and a base with multiple mounting points. The components are shown in a disassembled state, with the Z 534.037 positioned to the left of the Z 532.241.



A 230, flexible connection hoses, with long lever

- swivel spout 360°
 - aerator
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of stud bolt M8 x 1
- mounting hole size $\varnothing 35$ mm



KWC-No.

10.025.023.000

A 230, copper tubes

Finish






all chrome

Kitchen Low pressure

Lever mixer

- swivel spout 360°
 - jet regulator
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature indication
- copper tubes $\varnothing 8$ mm
- fastening by means of stud bolt M8 x 1
- mounting hole size $\varnothing 35$ mm

Flow rate 6 l/min (3 bar)
Acoustic group I



KWC-No.

10.021.033.000FL

A 235, flexible connection hoses

Finish






all chrome


Kitchen

Lever mixer

- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature indication
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size $\varnothing 35$ mm

Flow rate normal spray 12 l/min (3 bar)
Flow rate needle spray 13 l/min (3 bar)
Acoustic group I






KWC-No.

Finish

10.021.033.000LLFL

all chrome

A 235, flexible connection hoses, with long lever

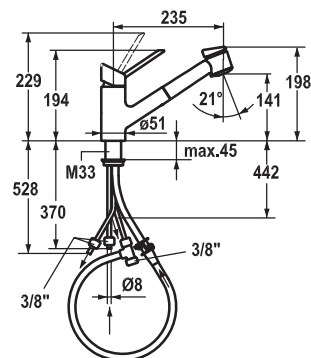

KWC-No.

Finish

10.025.033.000

all chrome

A 235, copper tubes

Kitchen

Lever mixer

- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Kitchen

Low pressure













Lever mixer


- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- copper tubes Ø8 mm
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate normal spray 12 l/min (3 bar)

Flow rate needle spray 13 l/min (3 bar)

Acoustic group I



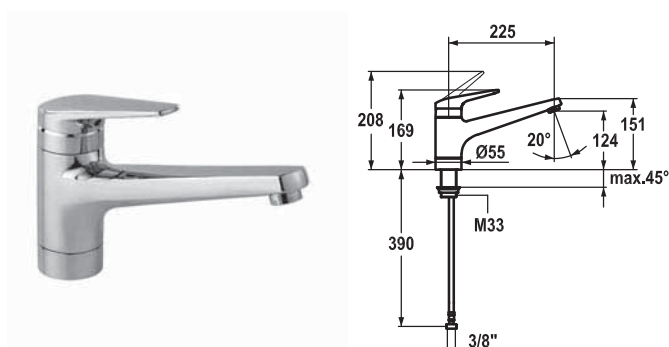






KWC-No. **10.071.023.000FL** Finish all chrome
A 225, flexible connection hoses

Kitchen

Lever mixer

- swivel spout 160°
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I

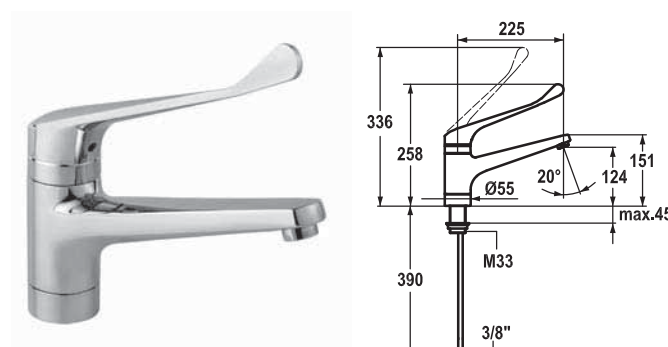





KWC-No. **10.071.023.000LLFL** Finish all chrome
A 225, flexible connection hoses, with long lever


Kitchen

Lever mixer

- swivel spout 160°
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I



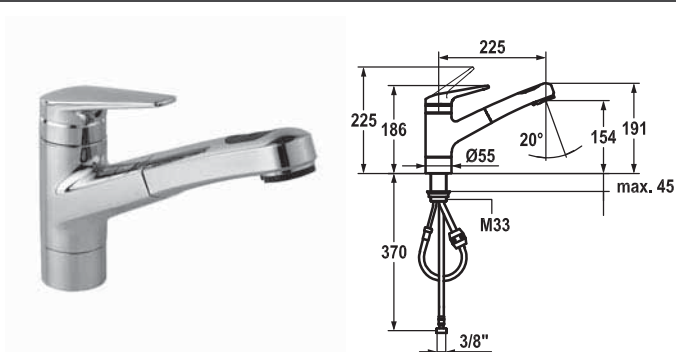







KWC-No. **10.071.033.000FL** Finish all chrome
A 225, flexible connection hoses

Kitchen

Lever mixer

- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - with lockable needle spray
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate normal spray 12 l/min (3 bar)
Flow rate needle spray 13 l/min (3 bar)
Acoustic group I

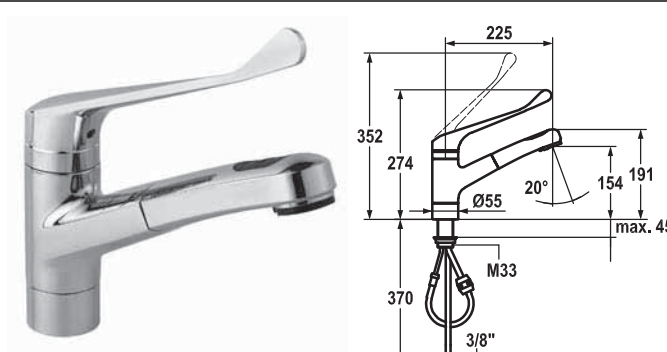






KWC-No. **10.071.033.000LLFL** Finish all chrome
A 225, flexible connection hoses, with long lever


Kitchen

Lever mixer

- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - with lockable needle spray
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 130°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate normal spray 12 l/min (3 bar)
Flow rate needle spray 13 l/min (3 bar)
Acoustic group I



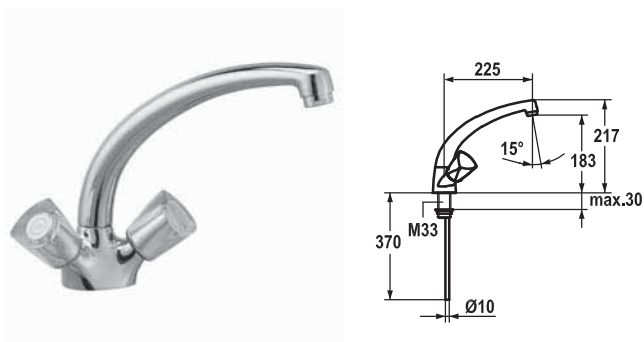

KWC-No.

K.10.41.23.000A02
A 225, copper tubes

Finish





all chrome

Kitchen

Two-handle mixer

- plastic handles, removable
- swivel spout 160°
 - Neoperl® ascade®
- stainless steel valve seat
- flat valves M20 x 1.25
- copper tubes Ø10 mm
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I

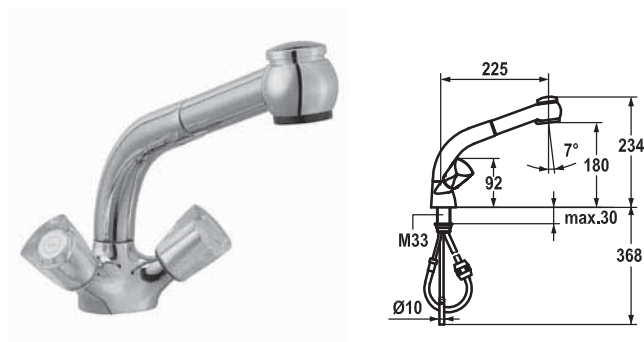

KWC-No.

K.10.41.03.000A03
A 225, copper tubes

Finish





all chrome


Kitchen

Two-handle mixer

- detachable for installation below windows - detached 88 mm
- plastic handles, removable
- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - with lockable needle spray
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 160°
- stainless steel valve seat
- flat valves M20 x 1.25
- copper tubes Ø10 mm
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate normal spray 12 l/min (3 bar)
Flow rate needle spray 13 l/min (3 bar)
Acoustic group I





KWC-No.

K.10.41.03.000C03
A 225, copper tubes

Finish

all chrome

Kitchen







Two-handle mixer

- detachable for installation below windows - detached 92 mm
- KWC CORONA metal handles, removable
- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - with lockable needle spray
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 160°
- stainless steel valve seat
- flat valves M20 x 1.25
- copper tubes Ø10 mm
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate normal spray 12 l/min (3 bar)

Flow rate needle spray 13 l/min (3 bar)

Acoustic group I



KWC-No.

K.11.42.42.000A76
AD 153 +/- 8 mm, A 125

Finish

all chrome




Kitchen Basin


Two-handle mixer

- plastic handles, removable
- fixed spout
 - Neoperl® cascade®
- stainless steel valve seat
- flat valves M20 x 1.25
- wall connections 1/2" x 1/2", without shut-off valve L 40 eccentric 4 mm, K.30.99.01.000.43

Flow rate 12 l/min (3 bar)

Acoustic group I



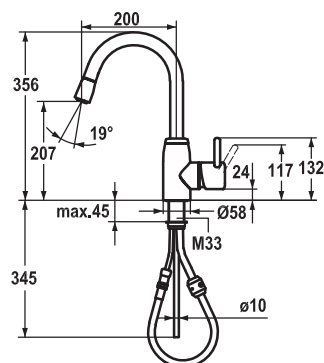











KWC-No.	Finish
10.501.042.000 A 200, copper tubes	all chrome
10.501.042.700 A 200, copper tubes	stainless steel


Kitchen

Lever mixer


- lever installation only possible on the right side
- pull-out aerator
 - Neoperl® cascade®
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 140°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- copper tubes Ø10 mm
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I



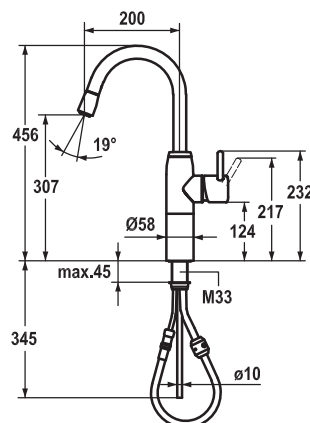

- Lever mixer
- socket 100 mm
- lever installation only possible on the right side
- pull-out aerator
 - Neoperl® cascade®
 - up to 600 mm pull-out length
 - hose surface to fit faucet surface
- hose guide, swivelling 140°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- copper tubes ø10 mm
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

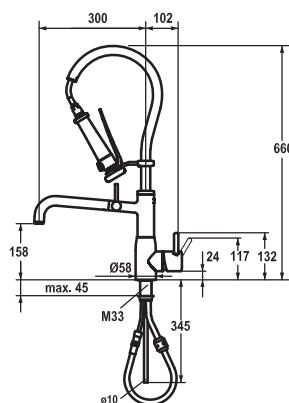

KWC-No.

Finish

10.501.134.000

all chrome

A 300, copper tubes

Kitchen

Lever mixer









- lever installation only possible on the right side
- hose guide, swivelling 160°
- swivel spout 160°
 - Neoperl® cascade®
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
 - up to 600 mm pull-out length
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- copper tubes Ø10 mm
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm


Flow rate 12 l/min (3 bar)

Acoustic group I

Spray: Flow rate 15 l/min (3 bar)

Spray: Acoustic group II



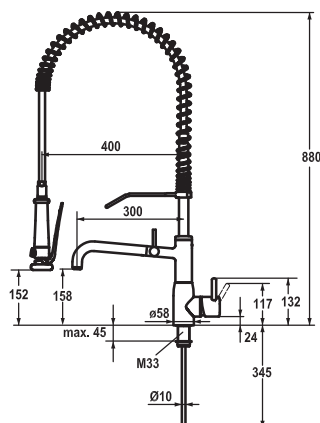

KWC-No.	Finish
10.501.154.000	all chrome
A 300, copper tubes, with wall flange	
10.501.144.000	all chrome
A 300, copper tubes, without wall flange	

Kitchen

Lever mixer











- suspension spring
- lever installation only possible on the right side
- swivel spout 180°
 - Neoperl® cascade®
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- copper tubes Ø10 mm
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm


Flow rate 12 l/min (3 bar)

Acoustic group I

Spray: Flow rate 15 l/min (3 bar)

Spray: Acoustic group II



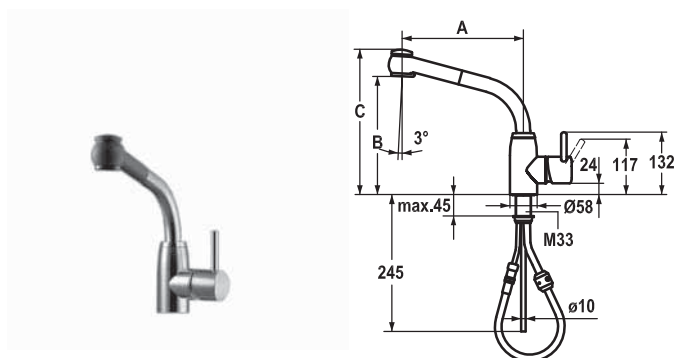

KWC-No.	Finish
10.501.003.736	stainless steel/matte black
A 215, B 239, C 295, copper tubes	
10.501.004.736	stainless steel/matte black
A 260, B 251, C 309, copper tubes	

Kitchen







Lever mixer

- lever installation only possible on the right side
- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - with lockable needle spray
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 140°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- copper tubes Ø10 mm
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate normal spray 12 l/min (3 bar)

Flow rate needle spray 13 l/min (3 bar)

Acoustic group I

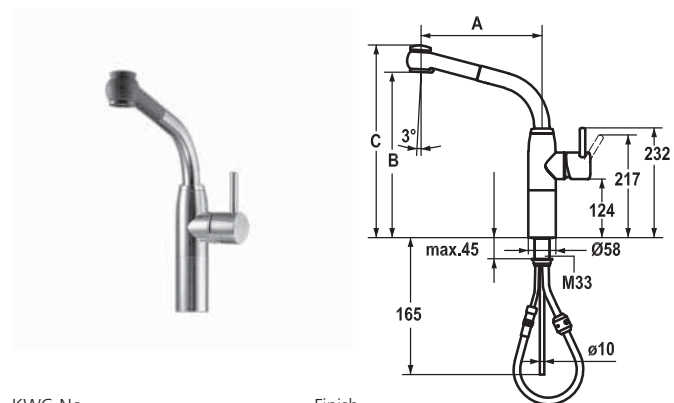

KWC-No.	Finish
10.501.163.736	stainless steel/matte black
A 215, B 339, C 395, copper tubes	
10.501.164.736	stainless steel/matte black
A 260, B 351, C 408, copper tubes	

Kitchen






Lever mixer


- socket 100 mm
- lever installation only possible on the right side
- pull-out spray with KWC JETCLEAN
 - up to 700 mm pull-out length
 - with lockable needle spray
 - automatic diverter reset
 - hose surface to fit faucet surface
- hose guide, swivelling 140°
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- copper tubes Ø10 mm
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate normal spray 12 l/min (3 bar)

Flow rate needle spray 12 l/min (3 bar)

Acoustic group I






KWC-No.

Z.536.159.000

Finish

all chrome



KWC-No.

Z.536.063.000

Finish

all chrome

Z.536.063.700

Soap dispensers


Soap dispenser KWC AVA

- easily refillable from surface without disassembly
- mounting hole size $\varnothing 26$ mm
- Scope of delivery:
 - pump
 - soap container, filling capacity 300 ml

Soap dispensers

Soap dispenser KWC EVE

- easily refillable from surface without disassembly
- mounting hole size $\varnothing 26$ mm
- Scope of delivery:
 - pump
 - soap container, filling capacity 300 ml




KWC-No.

Z.536.063.150

Finish

glacier white



KWC-No.

Z.536.063.151

Finish

black chrome-plated

Soap dispensers


Soap dispenser KWC EVE

- easily refillable from surface without disassembly
- mounting hole size $\varnothing 26$ mm
- Scope of delivery:
 - pump
 - soap container, filling capacity 300 ml

Soap dispensers

Soap dispenser KWC EVE

- easily refillable from surface without disassembly
- mounting hole size $\varnothing 26$ mm
- Scope of delivery:
 - pump
 - soap container, filling capacity 300 ml



KWC-No.


Finish

Z.536.062.700

Soap dispensers

Soap dispenser KWC INOX

- easily refillable from surface without disassembly
- mounting hole size $\varnothing 26$ mm
- Scope of delivery:
 - pump
 - soap container, filling capacity 300 ml



KWC-No.

Finish

Z.536.060.000


all chrome

Z.536.060.700

Soap dispensers

Soap dispenser KWC ONO

- easily refillable from surface without disassembly
- mounting hole size $\varnothing 26$ mm
- Scope of delivery:
 - pump
 - soap container, filling capacity 300 ml



KWC-No.

Finish


Z.536.332.000

all chrome

Soap dispensers

Soap dispenser KWC SIN

- easily refillable from surface without disassembly
- mounting hole size $\varnothing 26$ mm
- Scope of delivery:
 - pump
 - soap container, filling capacity 300 ml



KWC-No.

Finish

Z.536.109.000

all chrome


Soap dispensers

Soap dispenser KWC PRIMO

- easily refillable from surface without disassembly
- mounting hole size $\varnothing 26$ mm
- Scope of delivery:
 - pump
 - soap container, filling capacity 300 ml



KWC Faucets for the commercial kitchen




KWC-No.	Finish
K.24.41.04.000C07	all chrome
A 300	
K.24.41.06.000C07	all chrome
A 450	

Commercial kitchen

Two-handle mixer

- KWC CORONA metal handles, removable
- swivel spout 360°
 - with adjustable gland
 - jet regulator
- stainless steel valve seat
- flat valves M20 x 1.25
- copper tubes Ø15 mm
- fastening by means of threaded sleeve 1 1/4"
- mounting hole size Ø42 mm

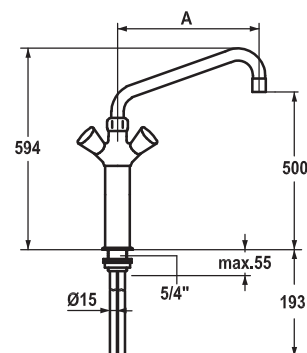













KWC-No.	Finish
K.24.41.20.000C07	all chrome
A 300	
K.24.41.21.000C07	all chrome
A 450	


Commercial kitchen

Two-handle mixer

- pillar 300 mm
- KWC CORONA metal handles, removable
- swivel spout 360°
 - with adjustable gland
 - jet regulator
- stainless steel valve seat
- flat valves M20 x 1.25
- copper tubes Ø15 mm
- fastening by means of threaded sleeve 1 1/4"
- mounting hole size Ø42 mm

Flow rate 80 l/min (3 bar)
Acoustic group U











KWC-No.	Finish
K.24.41.32.000C07	all chrome
A 300	
K.24.41.34.000C07	all chrome
A 450	

Commercial kitchen

Two-handle mixer

- pillar 300 mm
- KWC CORONA metal handles, removable
- automatic outlet draining
- preassembled socket
- swivel spout 360°
 - with adjustable gland
 - jet regulator
- stainless steel valve seat
- flat valves M20 x 1.25
- mounting hole size $\varnothing 62$ mm
- copper tubes $\varnothing 15$ mm

Flow rate 60 l/min (3 bar)
Acoustic group U

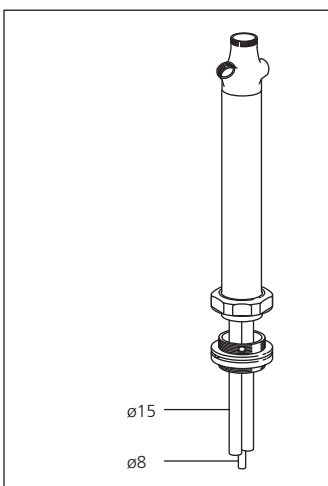






KWC-No.	Finish
K.24.41.A2.000C07	all chrome
A 300, B 300, C 394	


Commercial kitchen

Two-handle mixer

- KWC CORONA metal handles, removable
- swivel spout 360°
 - with adjustable gland
 - jet regulator
- stainless steel valve seat
- flat valves M20 x 1.25
- copper tubes $\varnothing 15$ mm
- fastening by means of threaded sleeve 1 1/4"
- mounting hole size $\varnothing 42$ mm

Flow rate 80 l/min (3 bar)
Acoustic group U





KWC-No.

Finish

K.24.42.21.000C86

all chrome

AD 153 +/- 15 mm, A 300

K.24.42.24.000C86


all chrome

AD 153 +/- 15 mm, A 450

Commercial kitchen

Two-handle mixer

- KWC CORONA metal handles, removable
- swivel spout
 - with adjustable gland
 - jet regulator
- stainless steel valve seat
- flat valves M20 x 1.25
- wall connections $\frac{3}{4}$ " x $\frac{3}{4}$ ", without shut-off valve L 40 eccentric 7.5 mm, K.30.99.01.000.46



KWC-No.

Finish

K.24.42.22.000C74

all chrome



AD 153, A 300

Commercial kitchen










Two-handle mixer


- KWC CORONA metal handles, removable
- swivel spout
 - with adjustable gland
 - jet regulator
- stainless steel valve seat
- flat valves M20 x 1.25
- wall connections $\frac{3}{4}$ " x $\frac{3}{4}$ ", without shut-off valve L 160 K.30.99.14.000.46

Flow rate 105 l/min (3 bar)
Acoustic group U



Flow rate 105 l/min (3 bar)
Acoustic group U





KWC-No.

K.24.42.11.000C86

AD 153 +/- 15 mm, A 300

Finish

all chrome







Commercial kitchen

Two-handle mixer

- KWC CORONA metal handles, removable
- swivel spout
 - with adjustable gland
 - jet regulator
- stainless steel valve seat
- flat valves M20 x 1.25
- wall connections $\frac{3}{4}$ " x $\frac{3}{4}$ ", without shut-off valve L 40 eccentric 7.5 mm, K.30.99.01.000.46

Flow rate 105 l/min (3 bar)

Acoustic group U



KWC-No.

K.24.42.17.000C86

AD 153 +/- 15 mm, G $\frac{3}{4}$ "

Finish

all chrome






Commercial kitchen


Two-handle mixer

- KWC CORONA metal handles, removable
- intrinsically safe against backflow
- threaded outlet for hose connection
- stainless steel valve seat
- flat valves M20 x 1.25
- wall connections $\frac{3}{4}$ " x $\frac{3}{4}$ ", without shut-off valve L 40 eccentric 7.5 mm, K.30.99.01.000.46

Flow rate 105 l/min (3 bar)

Acoustic group U










KWC-No. **K.24.42.19.000C86** Finish all chrome
AD 153 +/- 15 mm, G 3/4" x DN 20


Commercial kitchen

Two-handle mixer

- with vacuum breaker
- KWC CORONA metal handles, removable
- intrinsically safe against backflow
- threaded outlet for hose connection
- stainless steel valve seat
- flat valves M20 x 1.25
- wall connections 3/4" x 3/4", without shut-off valve L 40 eccentric 7.5 mm, K.30.99.01.000.46

Flow rate 40 l/min (3 bar)
Acoustic group U





KWC-No.

Finish

K.24.42.41.000C74

all chrome

AD 153, A 300, B 252, C 345

K.24.42.42.000C74

all chrome







AD 153, A 300, B 356, C 449

Commercial kitchen

Two-handle mixer

- KWC CORONA metal handles, removable
- swivel spout 360°
 - with adjustable gland
 - jet regulator
- stainless steel valve seat
- flat valves M20 x 1.25
- pillar connections $\frac{3}{4}$ " x $\frac{3}{4}$ " L 45 K.30.99.35.000.46
- mounting hole size $\varnothing 28$ mm

Flow rate 100 l/min (3 bar)
Acoustic group U



KWC-No.

Finish

K.24.42.E1.000C35

all chrome

AD 153, A 300, B 210, C 305

K.24.42.E2.000C35

all chrome






AD 153, A 300, B 315, C 410


Commercial kitchen

Two-handle mixer

- KWC CORONA metal handles, removable
- swivel spout 360°
 - with adjustable gland
 - jet regulator
- stainless steel valve seat
- flat valves M20 x 1.25
- connecting thread $\frac{3}{4}$ "
- mounting hole size $\varnothing 28$ mm

Flow rate 110 l/min (3 bar)
Acoustic group U












KWC-No.	Finish
K.24.42.K1.000C34 AD 153, A 250, B 215, C 297	all chrome
K.24.42.K3.000C34 AD 153, A 250, B 310, C 392	all chrome
K.24.42.K5.000C34 AD 153, A 350, B 215, C 297	all chrome

Commercial kitchen

Two-handle mixer

- KWC CORONA metal handles, removable
- swivel spout 180°
 - jet regulator
- stainless steel valve seat
- flat valves M20 x 1.25
- connecting thread 1/2"
- mounting hole size Ø22 mm

Flow rate 42 l/min (3 bar)
Acoustic group U







KWC-No.	Finish
K.24.41.24.000C02 A 300	all chrome

Commercial kitchen

Two-handle mixer


- KWC CORONA metal handles, removable
- swivel spout 160°
 - jet regulator
- stainless steel valve seat
- flat valves M20 x 1.25
- copper tubes Ø10 mm
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate 30 l/min (3 bar)
Acoustic group U





KWC-No. **K.24.41.60.000C06** Finish all chrome










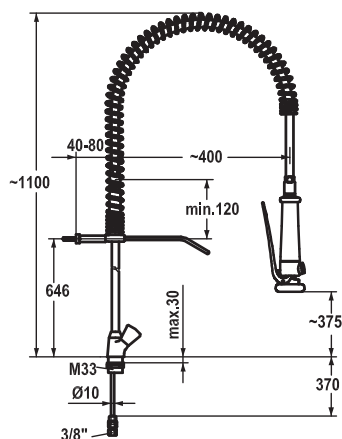


Commercial kitchen

Two-handle mixer

- suspension spring
- KWC CORONA metal handles, removable
- intrinsically safe against backflow
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- stainless steel valve seat
- flat valves M20 x 1.25
- copper tubes Ø10 mm
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm


Acoustic group II Spray: Flow rate 18 l/min (3 bar)

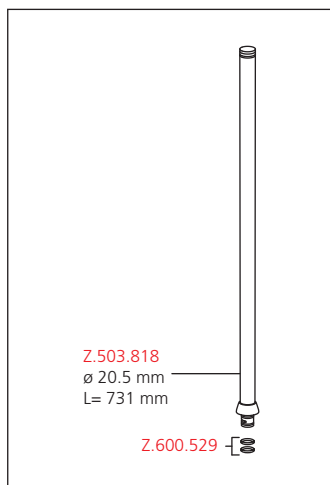



KWC-No. **K.24.41.61.000C06**
A 180

Finish all chrome










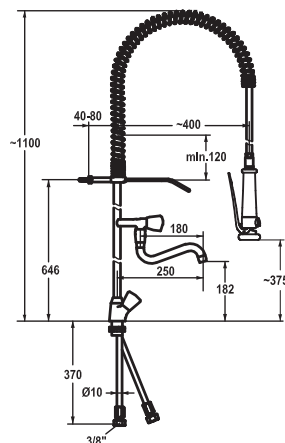


Commercial kitchen

Two-handle mixer

- suspension spring
- KWC CORONA metal handles, removable
- intrinsically safe against backflow
- swivel spout 180°
 - jet regulator
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- stainless steel valve seat
- flat valves M20 x 1.25
- copper tubes ø10 mm
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 25 l/min (3 bar)
Acoustic group II
Spray: Flow rate 18 l/min (3 bar)

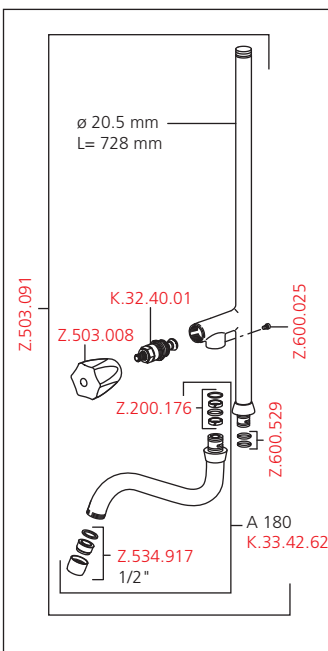




KWC-No.

K.24.40.60.000C34

Finish

all chrome








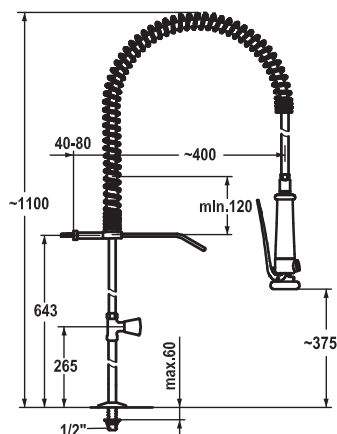


Commercial kitchen

Vertical shut-off valve

- suspension spring
- KWC CORONA metal handle, removable (cold water)
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- stainless steel valve seat
- flat valves M20 x 1.25
- connecting thread 1/2"
- mounting hole size $\varnothing 22$ mm

Spray: Flow rate 18 l/min (3 bar)
Acoustic group II

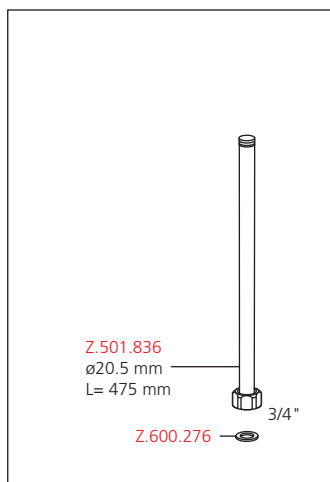




KWC-No.

K.24.42.70.000C78

AD 153 +/- 8 mm

Finish

all chrome










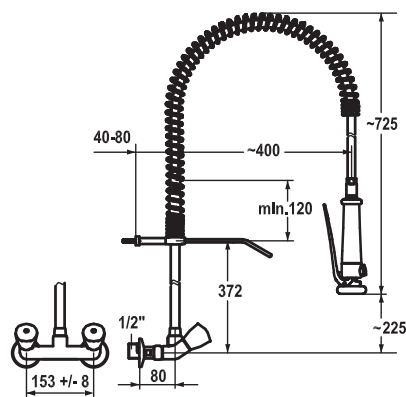


Commercial kitchen

Two-handle mixer

- suspension spring
- KWC CORONA metal handles, removable
- intrinsically safe against backflow
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- stainless steel valve seat
- flat valves M20 x 1.25
- wall connections 1/2" x 3/4", without shut-off valve, L 40, eccentric, 4 mm, K.30.99.01.000.44


Spray: Flow rate 18 l/min (3 bar)
Acoustic group I

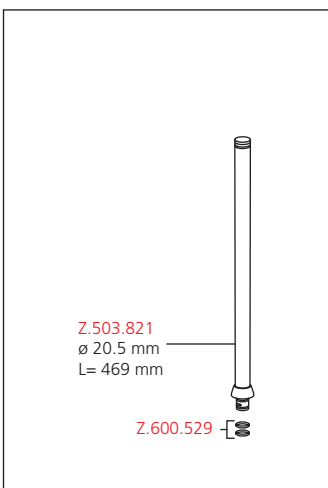



KWC-No. **K.24.42.74.000C78**
 AD 153 +/- 8 mm, A 300

Finish all chrome












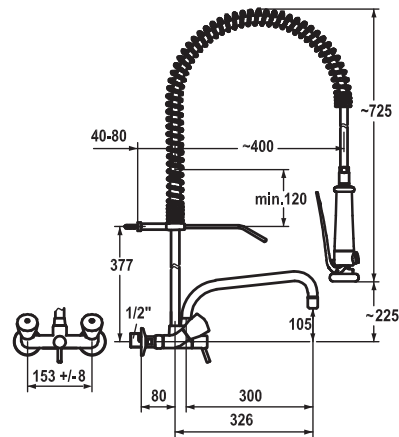


Commercial kitchen

Two-handle mixer

- suspension spring
- KWC CORONA metal handles, removable
- intrinsically safe against backflow
- swivel spout 180°
 - jet regulator
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- stainless steel valve seat
- flat valves M20 x 1.25
- wall connections 1/2" x 3/4", without shut-off valve, L 40, eccentric 4 mm, K.30.99.01.000.44

Flow rate 28 l/min (3 bar)
 Acoustic group II
 Spray: Flow rate 18 l/min (3 bar)

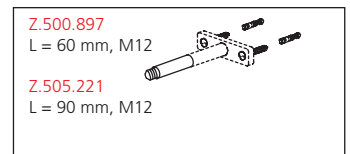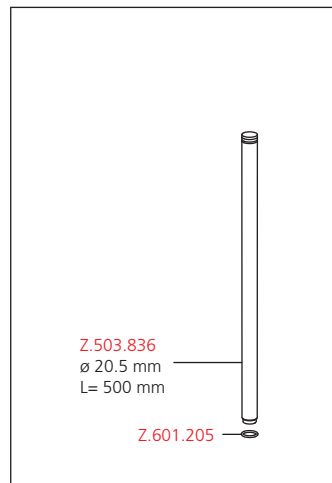




KWC-No.

K.24.40.70.000C34

Finish

all chrome








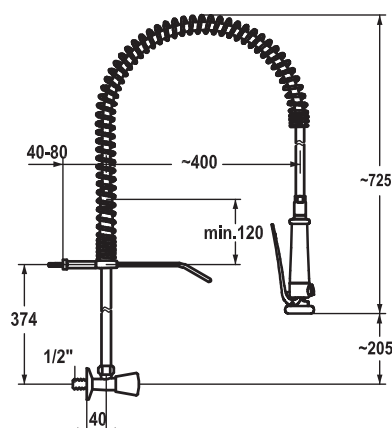


Commercial kitchen

Corner valve

- suspension spring
- KWC CORONA metal handle, removable (cold water)
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- stainless steel valve seat
- flat valves M20 x 1.25
- connecting thread 1/2"


Spray: Flow rate 18 l/min (3 bar)
Acoustic group II

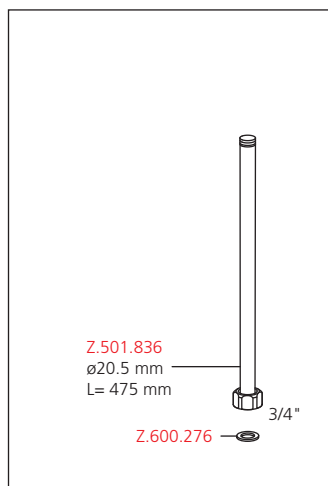



KWC-No. **K.24.42.62.000C71**
AD 153

Finish all chrome










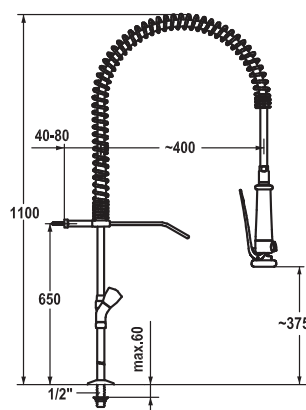


Commercial kitchen

Two-handle mixer

- KWC CORONA metal handles, removable
- intrinsically safe against backflow
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- stainless steel valve seat
- flat valves M20 x 1.25
- pillar connections 1/2" x 3/4" L 130 K.30.99.33.000.44
- mounting hole size ø22 mm


Spray: Flow rate 18 l/min (3 bar)
Acoustic group I

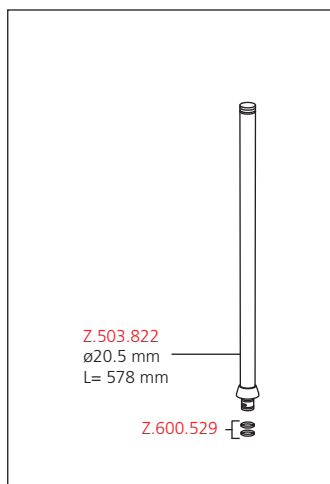



KWC-No. **K.24.42.64.000C71**
AD 153, A 300

Finish all chrome












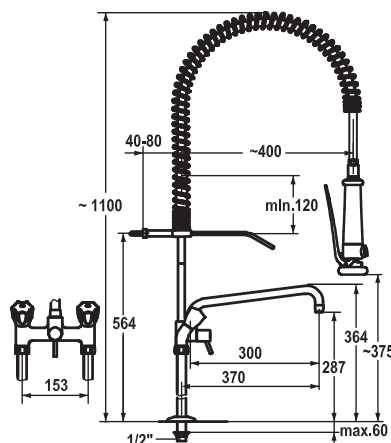



Commercial kitchen

Two-handle mixer

- suspension spring
- KWC CORONA metal handles, removable
- intrinsically safe against backflow
- swivel spout 180°
 - jet regulator
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- stainless steel valve seat
- flat valves M20 x 1.25
- pillar connections 1/2" x 3/4" L 130 K.30.99.33.000.44
- mounting hole size ø22 mm

Flow rate 28 l/min (3 bar)
Acoustic group II
Spray: Flow rate 18 l/min (3 bar)

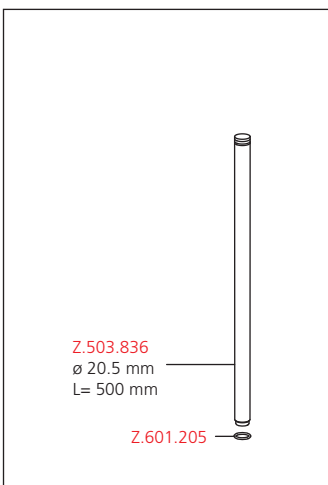

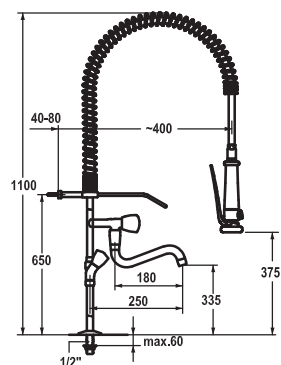

KWC-No. **K.24.42.61.000C71**
AD 153, A 180











Finish all chrome


Commercial kitchen

Two-handle mixer

- suspension spring
- KWC CORONA metal handles, removable
- intrinsically safe against backflow
- swivel spout 180°
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- stainless steel valve seat
- flat valves M20 x 1.25
- pillar connections 1/2" x 3/4" L 130 K.30.99.33.000.44
- mounting hole size ø22 mm

Flow rate 28 l/min (3 bar)
Acoustic group I
Spray: Flow rate 18 l/min (3 bar)

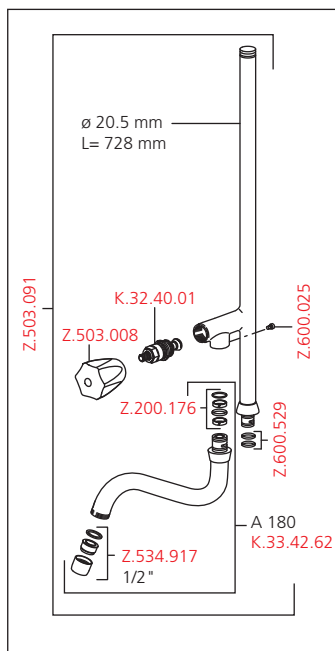








KWC-No.	Finish
24.501.064.000	all chrome
A 300	
24.501.066.000	all chrome
A 450	

Commercial kitchen

Lever mixer

- pillar 300 mm
- swivel spout 360°
 - with adjustable gland
 - jet regulator
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature indication
- copper tubes $\varnothing 15$ mm
- fastening by means of threaded sleeve 1 1/4"
- mounting hole size $\varnothing 42$ mm

Flow rate 40 l/min (3 bar)
Acoustic group U







KWC-No.	Finish
24.501.044.000	all chrome
A 300	
24.501.046.000	all chrome
A 450	


Commercial kitchen

Lever mixer

- swivel spout 360°
 - with adjustable gland
 - jet regulator
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature indication
- copper tubes $\varnothing 15$ mm
- fastening by means of threaded sleeve 1 1/4"
- mounting hole size $\varnothing 42$ mm

Flow rate 40 l/min (3 bar)
Acoustic group U









KWC-No.	Finish
24.501.054.000	all chrome
A 300	
24.501.056.000	all chrome
A 450	


Commercial kitchen

Lever mixer

- pillar 100 mm
- swivel spout 360°
 - with adjustable gland
 - jet regulator
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- copper tubes $\varnothing 15$ mm
- fastening by means of threaded sleeve 1 1/4"
- mounting hole size $\varnothing 42$ mm

Flow rate 40 l/min (3 bar)
Acoustic group U





KWC-No.

24.503.174.000

AD 153, A 300


Finish

all chrome

Commercial kitchen

Lever mixer

- swivel spout 360°
 - with adjustable gland
 - jet regulator
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- pillar connections $\frac{3}{4}$ " x $\frac{3}{4}$ " L 45 K.30.99.35.000.46
- mounting hole size $\varnothing 30$ mm



KWC-No.

24.503.184.000

AD 153, A 300

Finish





all chrome

Commercial kitchen





Lever mixer


- swivel spout 360°
 - with adjustable gland
 - jet regulator
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- pillar connections $\frac{3}{4}$ " x $\frac{3}{4}$ " L 195 K.30.99.36.000.46
- mounting hole size $\varnothing 30$ mm

Flow rate 42 l/min (3 bar)
Acoustic group II



Flow rate 42 l/min (3 bar)
Acoustic group II



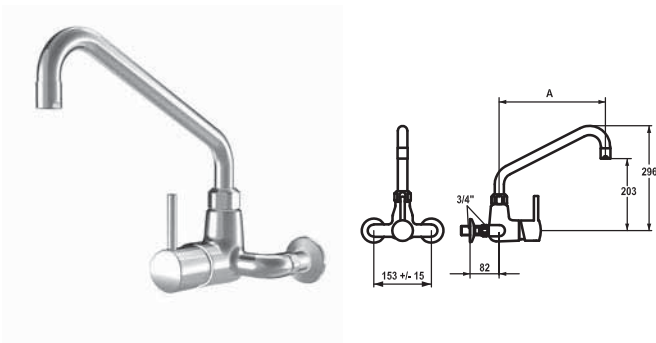






KWC-No.	Finish
24.502.194.000	all chrome
AD 153 +/- 15 mm, A 300	
24.502.196.000	all chrome
AD 153 +/- 15 mm, A 450	

Commercial kitchen

Lever mixer


- swivel spout
 - with adjustable gland
 - jet regulator
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- wall connections 3/4" x 3/4", without shut-off valve L 40 eccentric 7.5 mm, K.30.99.01.000.46

Flow rate 40 l/min (3 bar)
Acoustic group U





KWC-No. **24.501.130.000** Finish all chrome







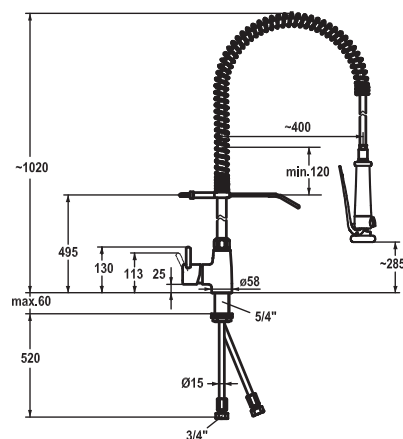



Commercial kitchen

Lever mixer

- suspension spring
- intrinsically safe against backflow
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature fluctuation
- copper tubes $\varnothing 15$ mm
- fastening by means of threaded sleeve $1 \frac{1}{4}$ "
- mounting hole size $\varnothing 42$ mm

Spray: Flow rate 18 l/min (3 bar)
Acoustic group II

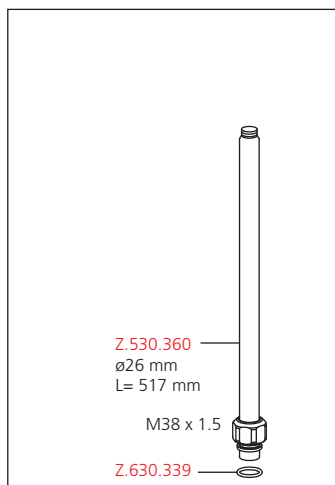

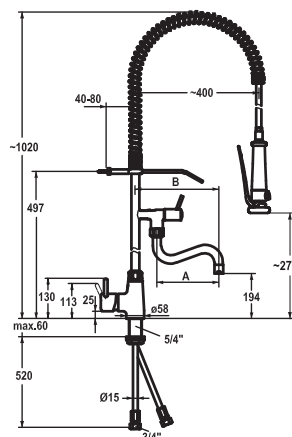










KWC-No.	Finish
24.501.144.000 A 200, B 270	all chrome
24.501.146.000 A 300, B 370	all chrome

Commercial kitchen

Lever mixer

- suspension spring
- intrinsically safe against backflow
- swivel spout
 - with adjustable gland
 - jet regulator
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- copper tubes $\varnothing 15$ mm
- fastening by means of threaded sleeve $1 \frac{1}{4}$ "
- mounting hole size $\varnothing 42$ mm


Flow rate 40 l/min (3 bar)
Acoustic group II
Spray: Flow rate 18 l/min (3 bar)

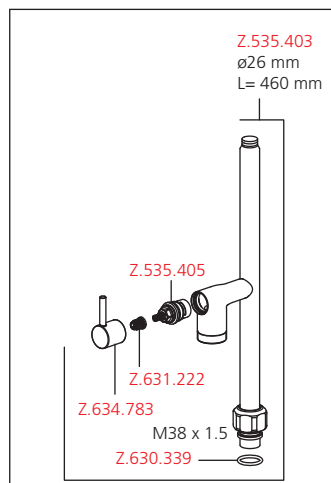



KWC-No. **24.503.114.000**
AD 153, A 200, B 270

Finish
all chrome









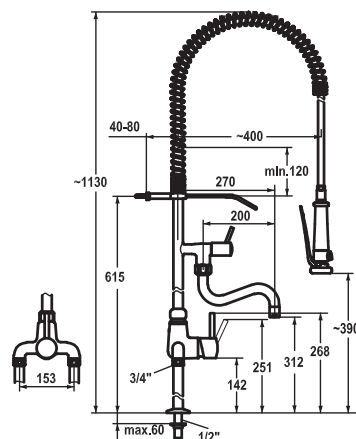


Commercial kitchen

Lever mixer


- suspension spring
- intrinsically safe against backflow
- swivel spout
 - with adjustable gland
 - jet regulator
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- pillar connections 1/2" x 3/4" L 130 K.30.99.34.000.44
- mounting hole size Ø22 mm

Flow rate 28 l/min (3 bar)
Acoustic group II
Spray: Flow rate 18 l/min (3 bar)

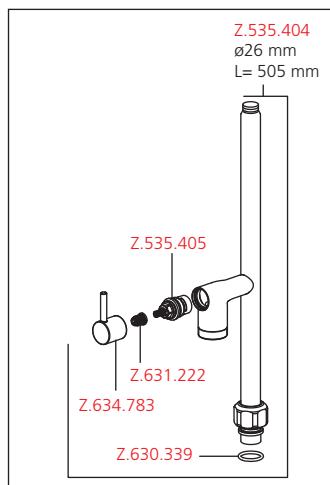



KWC-No.	Finish
24.503.124.000 AD 153, A 200, B 270	all chrome
24.503.126.000 AD 153, A 300, B 370	all chrome










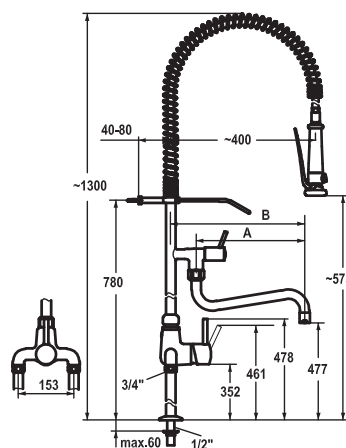


Commercial kitchen

Lever mixer


- suspension spring
- intrinsically safe against backflow
- swivel spout
 - with adjustable gland
 - jet regulator
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- pillar connections 1/2" x 3/4" L 340 K.30.99.38.000.44
- mounting hole size ø22 mm

Flow rate 20 l/min (3 bar)
Acoustic group II
Spray: Flow rate 18 l/min (3 bar)

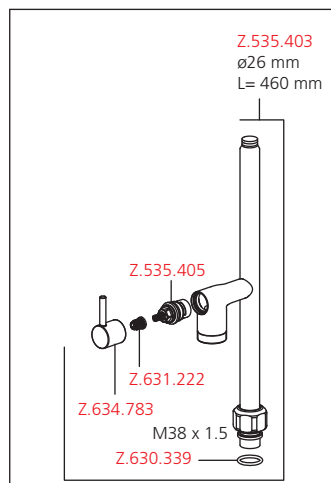



KWC-No.	Finish
24.502.164.000	all chrome
AD 153 +/- 8 mm, A 200, B 270	
24.502.166.000	all chrome
AD 153 +/- 8 mm, A 300, B 370	










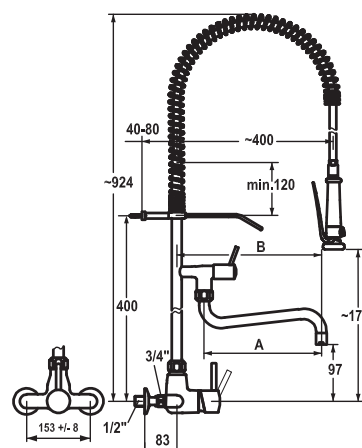



Commercial kitchen

Lever mixer

- suspension spring
- intrinsically safe against backflow
- swivel spout
 - with adjustable gland
 - jet regulator
- pre-rinse spray
 - with integrated delayed closing device to minimize water hammer
 - with valve maintenance unit for cleaning
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- wall connections 1/2" x 3/4", without shut-off valve L 40 eccentric 4 mm, K.30.99.01.000.44

Flow rate 20 l/min (3 bar)
Acoustic group II
Spray: Flow rate 18 l/min (3 bar)

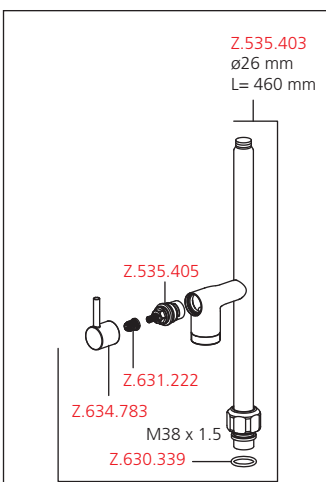

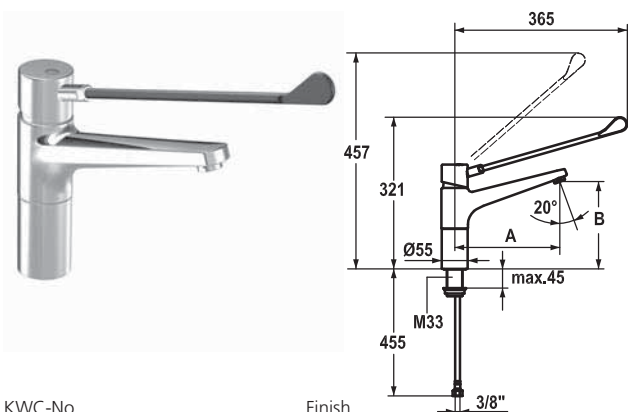






KWC-No.	Finish
24.501.103.000LLFL	all chrome
A 225, B 184, with long lever	
24.501.104.000LLFL	all chrome
A 300, B 207, with long lever	

Commercial kitchen

Lever mixer

- socket 85 mm
- swivel spout 160°
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)
Acoustic group I








KWC-No.	Finish
K.24.62.14.000B91	all chrome
AD 150 +/- 15 mm, A 300, B 60, with long lever	
K.24.62.16.000B91	all chrome
AD 150 +/- 15 mm, A 400, B 35, with long lever	


Commercial kitchen

Lever mixer

- swivel spout 120°
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- wall connections 1/2" x 3/4", with shut-off valve, L 40, eccentric 7.5 mm, K.30.80.06.000.44

Flow rate 12 l/min (3 bar)
Acoustic group I











KWC-No.	Finish
K.24.62.44.000B87	all chrome
AD 150, A 300, B 200, with long lever	
K.24.62.46.000B87	all chrome
AD 150, A 400, B 227, with long lever	

Commercial kitchen

Lever mixer

- swivel spout 120°
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- pillar connections 1/2" x 3/4" L 55 K.30.89.44.000.44
- mounting hole size ø22 mm

Flow rate 12 l/min (3 bar)
Acoustic group I







KWC-No.	Finish
K.25.40.14.000C35	all chrome
A 300	
K.25.40.16.000C35	all chrome
A 450	


Commercial kitchen

Wall mounted valve

- KWC CORONA metal handle, removable (cold water)
- swivel spout
 - with adjustable gland
 - jet regulator
- stainless steel valve seat
- flat valves M20 x 1.25
- connecting thread 3/4"

Flow rate 86 l/min (3 bar)
Acoustic group U





KWC-No.

Finish

K.24.40.00.000C35

all chrome

G 3/4"


Commercial kitchen

Shut-off valve

- KWC CORONA metal handle, removable (hot water to be requested when ordering)
- stainless steel valve seat
- flat valves M25 x 1.25
- connecting thread 3/4"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 110 l/min (3 bar)

Acoustic group U



KWC-No.

Finish

Z.536.530.145

graphite gray

Accessories: public / commercial faucets, Spare parts


pre-rinse spray

- with integrated delayed closing device to minimize water hammer
- with valve maintenance unit for cleaning
- connecting thread 1/2"



KWC Faucets for the bath


Faucets for the bath	
KWC AVA	96
KWC ONO	109
KWC ONO touch light PRO	123
KWC DOMO	137
KWC VITA	146
KWC VITA PRO	151
KWC USO	158
KWC VAROX	159



A 110, flexible connection hoses, without pop-up valve

- fixed spout
 - Neoperl®ac hé®
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm


A technical drawing of a vertical rod assembly. The assembly consists of a central rod with a threaded top section, a middle section with three horizontal flanges, and a bottom section with a nut and washer. A bracket on the left side of the middle section is labeled with the red text "Z.535.967".



A 110, flexible connection hoses, without pop-up valve

- COOLFIX - cold water flow in central lever position
- fixed spout
 - Neoperl® Ac hé®
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses ¾"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

A technical drawing of a vertical screw assembly. The assembly consists of a long central screw with a threaded section at the top and a hexagonal base. Four washers are positioned along the shaft. A bracket on the left side groups the three middle washers and is labeled with the red text "Z.535.967".



KWC-No.

Finish

12.198.041.000FL

all chrome

A 110, flexible connection hoses, with pop-up valve

12.198.051.000FL

all chrome

A 110, flexible connection hoses, without pop-up valve







Basin

Lever mixer

- fixed spout
 - Neoperl®ac hé®
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size $\varnothing 35$ mm

Flow rate 6 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

12.191.042.000FL

all chrome

A 125, flexible connection hoses, with pop-up valve

12.191.052.000FL

all chrome

A 125, flexible connection hoses, without pop-up valve






Basin


Lever mixer

- fixed spout
 - Neoperl®ac hé®
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size $\varnothing 35$ mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I






A 125, flexible connection hoses, without pop-up valve

- mounting hole size $\varnothing 35$ mm


Z.535.967



A 125, flexible connection hoses, without pop-up valve

the following were also performed:

Z.535.967

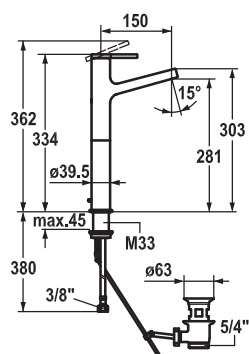

KWC-No.

Finish

12.191.393.000FL

all chrome

A 150, flexible connection hoses, with pop-up valve

12.191.093.000FL all chrome







A 150, flexible connection hoses, without pop-up valve

Basin

Lever mixer

- for vessel basin
- fixed spout
 - Neoperl® aché®
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses ¾"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 7.5 l/min (3 bar)
Acoustic group I



KWC-No.

Finish

12.191.131.000FL

all chrome

A 135, flexible connection hoses, with pop-up valve

12.191.141.000FL







A 135, flexible connection hoses, without pop-up valve


Basin

Lever mixer

- lever mixer
- lever installation possible on the right or left side
- swivel spout 180°
 - Neoperl®ac hé®
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5

Flow rate 7.5 l/min (3 bar)
Acoustic group I





KWC-No.

Finish

12.198.131.000FL

all chrome

A 135, flexible connection hoses, with pop-up valve

12.198.141.000FL

all chrome

A 135, flexible connection hoses, without pop-up valve








Basin

Lever mixer

- lever installation possible on the right or left side
- swivel spout 180°
 - Neoperl® Caché®
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5

Flow rate 6 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

11.192.033.000

all chrome

A 175, Trim kit

11.192.034.000

all chrome

A 225, Trim kit

Kitchen





Basin


Lever mixer

- fixed spout
 - Neoperl® Caché®
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- To be ordered separately:
 - unit for concealed installation 1/2" 39.193.400.931
 - (if necessary) extension set 20 mm Z.536.333

Flow rate 7.5 l/min (3 bar)

Acoustic group I

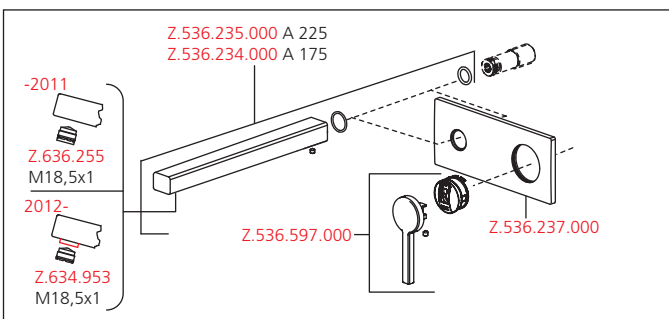

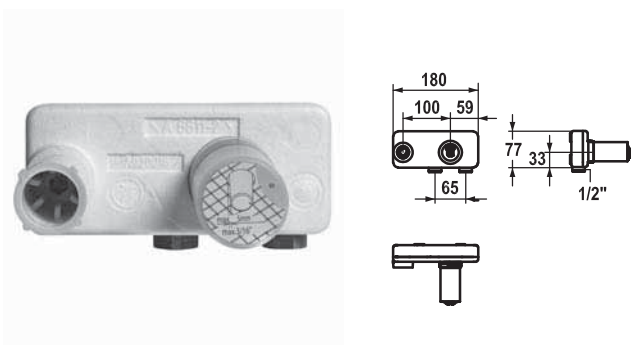

KWC-No.

Finish



39.193.400.931

Concealed

Accessories: technology and installation

Concealed unit wall two hole

- connecting thread 1/2"
- Suitable for:
 - KW 4 VA

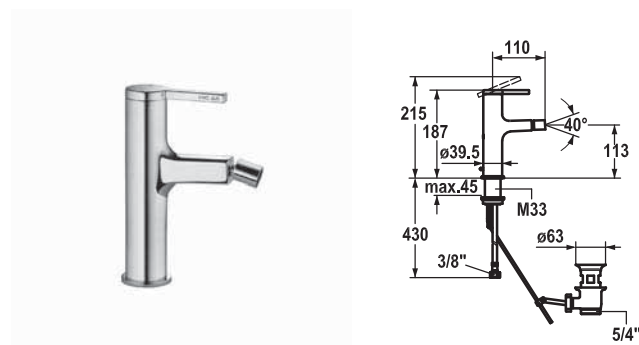

KWC-No.

Finish

13.191.041.000FL

all chrome

A 110, flexible connection hoses, with pop-up valve






Bidet


Lever mixer

- fixed spout
 - ball joint aerator Neoperl® Caché®
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size $\varnothing 35$ mm

Flow rate 12 l/min (3 bar)

Acoustic group 1














KWC-No. **20.192.440.000** Finish all chrome
AD 150 +/- 15 mm, without hand shower and hose

Tub

Lever mixer

- diverter with automatic reset
- intrinsically safe against backflow
- rotatable spout 45°
 - Neoperl®ac hé®
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44

Flow rate 20 l/min (3 bar)
Acoustic group I







KWC-No. **21.192.330.000** Finish all chrome
AD 150 +/- 15 mm, without hand shower and hose


Shower

Lever mixer

- intrinsically safe against backflow
- KWC cartridge S 25
 - with ceramic discs
 - flow rate and temperature continuously variable
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44

Flow rate 12 l/min (3 bar)
Acoustic group I










KWC-No. **20.192.503.000** Finish all chrome
AD 150 +/- 15 mm, A 190, without hand shower and hose

Tub Thermostat

Thermostat

- smartControl - water-saving device
- touchControl - the body of the mixer does not become hot
- hotControl - temperature handle with safety stop button 38°C
- turning handle to control flow and for diverter
- intrinsically safe against backflow
- fixed spout
 - Neoperl® aché®
- thermostatic precision control unit
 - constant water temperature (even when mains pressure fluctuates)
 - fast response
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44

Flow rate 21 l/min (3 bar)
Acoustic group II
Spray: Flow rate 15 l/min (3 bar)
Spray: Acoustic group I







KWC-No. **21.192.500.000** Finish all chrome
AD 150 +/- 15 mm, without hand shower and hose


Shower Thermostat

Thermostat

- smartControl - water-saving device
- touchControl - the body of the mixer does not become hot
- hotControl - temperature handle with safety stop button 38°C
- turning handle to control flow
- intrinsically safe against backflow
- thermostatic precision control unit
 - constant water temperature (even when mains pressure fluctuates)
 - fast response
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44

Spray: Flow rate 15 l/min (3 bar)
Spray: Acoustic group I





KWC-No.

Finish

26.196.213.000


all chrome

AD 150 +/- 15 mm, A 300, with hand shower and hose

Complete systems Thermostat

Shower system KWC AVA

- smartControl - water-saving device
- touchControl - the body of the mixer does not become hot
- touchControl - hand shower does not become hot
- swiveling bracket, shower head with ball joint
- hotControl - temperature handle with safety stop button 38°C
- turning handle to control flow and for diverter
- KWC ball joint bracket, elevation adjustment lockable
- tube diameter 20 mm
- intrinsically safe against backflow
- easy to install on existing connections
- thermostatic precision control unit
 - constant water temperature (even when mains pressure fluctuates)
 - fast response
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44
- Scope of delivery:
 - thermostat incl. wall connections with outlet (top) for water-bearing sliding wall bar
 - hand shower KWC BOSSANOVA mono 26.000.111.040
 - shower hose 1800 mm, plastic 26.001.014.000
 - shower head KWC PIATTO Q240
 - sliding wall bar kit 26.004.003.000
 - shower guide rod holder (top), for connecting guide rod and spray arm










KWC-No.	Finish
20.194.580.000	all chrome
Trim kit	
20.194.590.000	all chrome
Trim kit, with vacuum breaker	

Tub

Trim kit with function unit

- outflow top and below
- pressure diversion
- diverter with automatic reset
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- Scope of delivery:
 - function unit, lever, cap, sleeve, cover plate, diverter
 - fastening of the cover plate without screws
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 20 l/min (3 bar)
Acoustic group I









KWC-No.	Finish
21.194.580.000	all chrome
Trim kit	


Shower

Trim kit with function unit

- outflow top or below
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
- Scope of delivery:
 - function unit, lever, cap, sleeve, cover plate
 - fastening of the cover plate without screws
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 20 l/min (3 bar)
Acoustic group I





KWC-No.

20.194.480.000

Trim kit

Finish








all chrome

Tub Thermostat

Trim kit with thermostatic function unit

- outflow top and below
- pressure diversion
- hotControl - temperature handle with safety stop button 38°C
- diverter with automatic reset
- intrinsically safe against backflow
- Scope of delivery:
 - function unit, flow rate adjustment lever, temperature lever, sleeve, cover plate, holder for escutcheon
 - fastening of the cover plate without screws
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 21 l/min (3 bar)
Acoustic group I



KWC-No.

21.194.480.000

Trim kit

Finish







all chrome


Shower Thermostat

Trim kit with thermostatic function unit

- outflow top or below
- hotControl - temperature handle with safety stop button 38°C
- intrinsically safe against backflow
- Scope of delivery:
 - function unit, flow rate adjustment lever, temperature lever, sleeve, cover plate, holder for escutcheon, diverter
 - fastening of the cover plate without screws
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 21 l/min (3 bar)
Acoustic group I





KWC-No.

Finish

21.194.600.000

all chrome

Trim kit


Shower, Thermostat

Trim kit with thermostatic function unit

- without diverter
- without volume control
- hotControl - temperature handle with safety stop button 38°C
- intrinsically safe against backflow
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 21 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

26.191.073.000

all chrome

A 200


Additional accessories

Bathtub spout

- fixed spout
 - Neoperl® Ac hé®
- connecting thread ½"
- Suitable for:
 - KWA VA

Flow rate 27 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

27.190.050.000

all chrome

Trim kit


Additional accessories

Trim kit

- for shut-off valve
- for multiport diverter
- for multiport shut-off valve

▪ To be ordered separately:

- shut-off valve 1/2" K.38.93.00.931.34
- shut-off valve 3/4" K.38.H3.70.931A35
- multiport diverter 3/4 39.990.010.931
- multiport shut-off valve 1/2" 39.990.011.931



KWC-No.

Finish


39.990.011.931

G 1/2", Concealed

Accessories: technology and installation

Concealed unit for multiport shut-off valve

- with shut-off valve
- 1 mixed water inlet, 2 outlets
- connecting thread 1/2"



KWC-No.

Finish

K.38.93.00.931.34


G 1/2", Concealed

K.38.H3.70.931A35

G 3/4", Concealed

Accessories: technology and installation

Concealed unit for shut-off valve



KWC-No.

Finish


39.990.010.931

G 3/4", Concealed

Accessories: technology and installation

Concealed unit for multiport diverter

- without shut-off valve
- 1 mixed water inlet, 3 outlets
- connecting thread 3/4"










KWC-No.	Finish
12.151.042.000FL	all chrome
A 125, flexible connection hoses, with pop-up valve	
12.151.052.000FL	all chrome
A 125, flexible connection hoses, without pop-up valve	

Basin

Lever mixer

- fixed spout
- Neoperl®ac hé®
- KWC cartridge M 35
- with ceramic discs
- flow rate and temperature continuously variable
- temperature limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 7.5 l/min (3 bar)
Acoustic group I

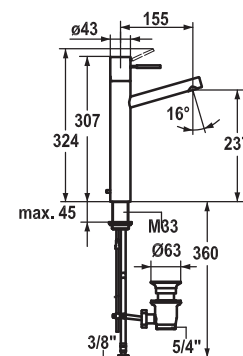







KWC-No.	Finish
12.151.393.000FL	all chrome
A 155, flexible connection hoses, with pop-up valve	
12.151.093.000FL	all chrome
A 155, flexible connection hoses, without pop-up valve	


Basin

Lever mixer

- for vessel basin
- fixed spout
- Neoperl®ac hé®
- KWC cartridge M 35
- with ceramic discs
- flow rate and temperature continuously variable
- temperature limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 7.5 l/min (3 bar)
Acoustic group I









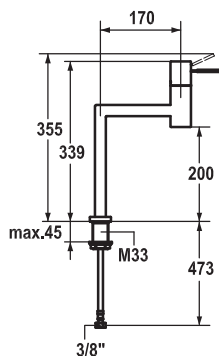


KWC-No. **12.151.293.000FL** Finish all chrome
A 170, flexible connection hoses, without pop-up valve

Basin

- Lever mixer
- for vessel basin
 - fixed spout
 - Neoperl® Caché®
 - KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
 - flexible connection hoses 3/8"
 - fastening by means of threaded sleeve M33 x 1.5
 - mounting hole size ø35 mm

Flow rate 7 l/min (3 bar)
Acoustic group I








KWC-No. **11.152.033.000** Finish all chrome
A 175, Trim kit
11.152.034.000 all chrome
A 225, Trim kit

Kitchen Basin

- Lever mixer
- fixed spout
 - Neoperl® Caché®
 - KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
 - To be ordered separately:
 - unit for concealed installation 1/2" 39.151.400.931
 - (if necessary) extension set 20 mm Z.536.333

Flow rate 7.5 l/min (3 bar)
Acoustic group I

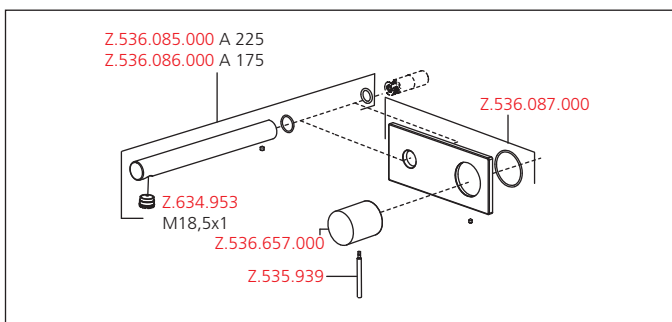

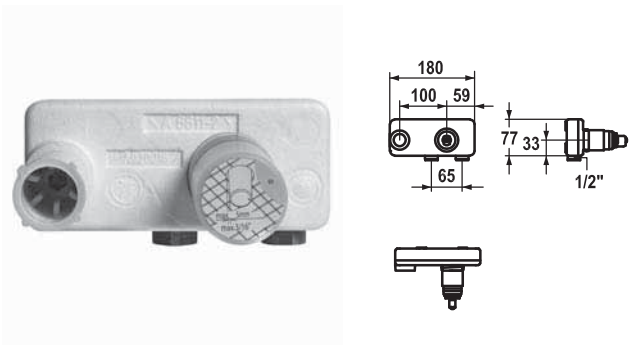

KWC-No.

Finish


39.151.400.931

Concealed

Accessories: technology and installation

Concealed unit wall two hole

- connecting thread 1/2"
- Suitable for:
 - KWON O



KWC-No.

Finish

13.151.041.000FL

all chrome

A 115, flexible connection hoses, with pop-up valve







Bidet


Lever mixer

- fixed spout
 - ball joint aerator Neoperl® Caché®
- KWC cartridge M 35
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 11 l/min (3 bar)

Acoustic group I

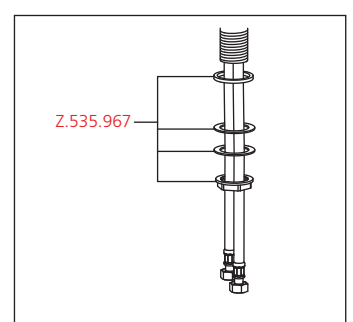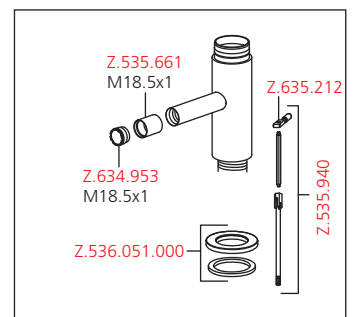












KWC-No.	Finish
12.151.342.000FL	all chrome
A 125, flexible connection hoses, with pop-up valve, mains receiver	
12.151.332.000FL	all chrome
A 125, flexible connection hoses, without pop-up valve, mains receiver	


Basin with LED-technology

Lever mixer

- lightpin with real time temperature indicator (color lightpin)
 - light switches on automatically when touched
 - cold water, light pin color: blue
 - mix water, light pin color: purple (linear from blue to red)
 - hot water, light pin color: red
 - after use: lightpin switches off automatically after 60 sec
- safety mode
 - during/after use: temperature > 45°C - light pin color blinking red
 - after use: lightpin switches off automatically when temperature falls below 38°C
- fixed spout
 - Neoperl® Caché®
- KWC light pin unit with ceramic discs
 - flow rate and temperature continuously variable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm
- Scope of delivery:
 - mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate 7.5 l/min (3 bar)
Acoustic group I



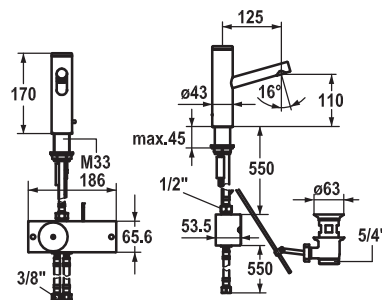


KWC-No.	Finish
12.151.432.000FL	all chrome
A 125, flexible connection hoses, with pop-up valve, battery	
12.151.402.000FL	all chrome
A 125, flexible connection hoses, without pop-up valve, battery	
12.151.442.000FL	all chrome
A 125, flexible connection hoses, with pop-up valve, mains receiver	
12.151.412.000FL	all chrome
A 125, flexible connection hoses, without pop-up valve, mains receiver	
12.151.452.000FL	all chrome
A 125, flexible connection hoses, with pop-up valve, power supply for concealed installation	
12.151.422.000FL	all chrome
A 125, flexible connection hoses, without pop-up valve, power supply for concealed installation	


Basin low-contact with LED-technology

Automatic

- DDSA® sensor technology radiation-free
- touch light
 - regulation by tapping
 - 1 x tapping - cold water, lighting color: blue
 - 2 x tapping - mix water, lighting color: orange
 - 3 x tapping - hot water, lighting color: red
 - 1 x tapping for 5 sec. - cleaning mode, lighting color: green
- microprocessor-control
 - with cleaning programme
 - duration of water flow - 10 seconds
- fixed spout
 - Neoperl® Caché®
- valve unit
 - two-way
 - control of three temperature grades
 - temperature limitation
 - water flow not adjustable
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm
- Scope of delivery:
 - battery 1.5 V Alkaline AA LR6 (4x)
 - lifespan at 50 circuits/day: 1 year
 - mains receiver 100-240 V / operating voltage 6.5 V / cable length 1100 mm
 - power supply for concealed installation 100-240 V / operating voltage 6.5 V / cable length 1100 mm


Flow rate 5 l/min (3 bar)
Acoustic group I

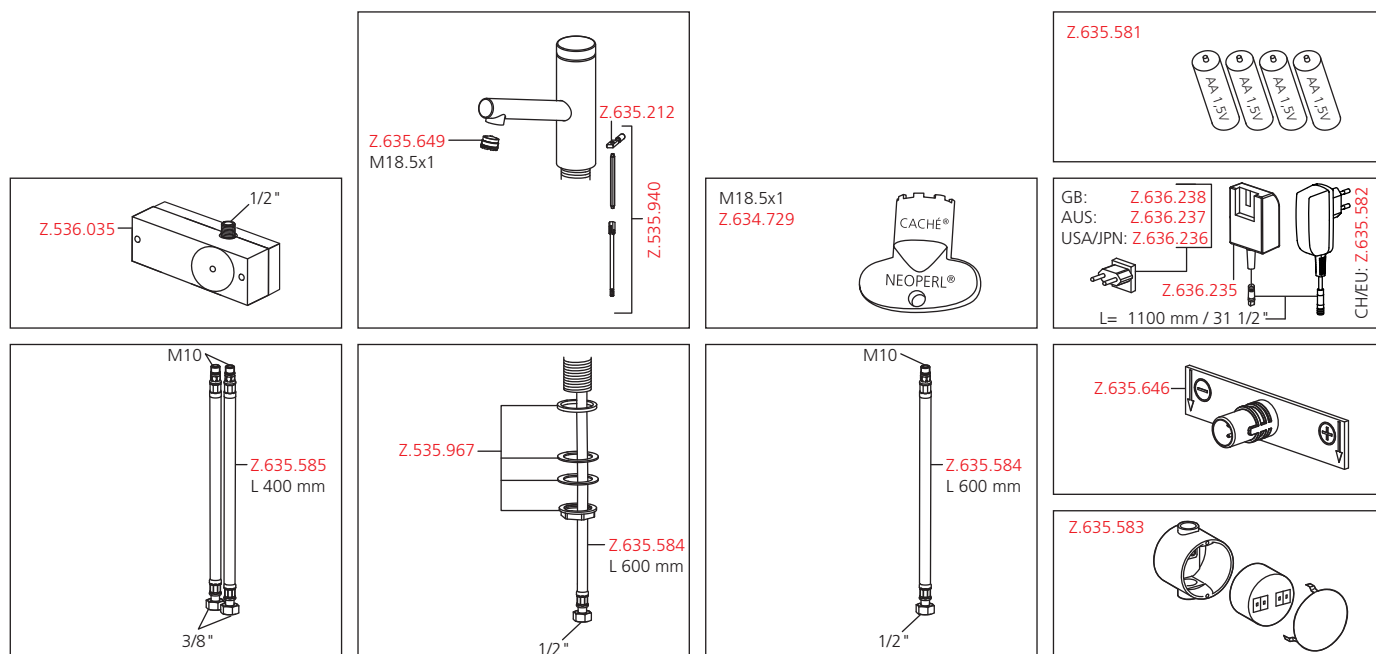



- Automatic
 - DDSA® sensor technology radiation-free
- touchless
- touchless control
- installation possible on the following materials: ceramic, synthetic material, glass
- microprocessor-control
 - with cleaning programme
 - duration of water flow - 10 seconds
- fixed spout
 - Neoperl® tactile
- valve unit
 - one-way
 - control of pre-mixed temperature through valve unit
 - temperature limitation
 - water flow not adjustable
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- Scope of delivery:
 - battery 1.5 V Alkaline AA LR6 (4x)
 - lifespan at 200 circuits/day: 2 years
 - mains receiver 100-240 V / operating voltage 6.5 V / cable length 1100 mm
 - power supply for concealed installation 100-240 V / operating voltage 6.5 V / cable length 1100 mm

Z.635.583

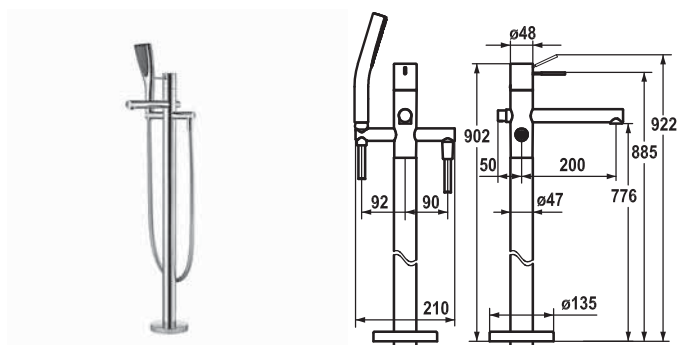

KWC-No. **20.151.094.000** all chrome
A 200, with hand shower and hose

Tub

Lever mixer





- for freestanding tub
- fixed spout
 - Neoperl® L IM®
- KWC cartridge L 40
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- Scope of delivery:
 - hand shower KWC ELY mono 26.000.120.000
 - shower hose 1800 mm, plastic 26.001.014.000
- To be ordered separately:
 - pre-assembly unit Z.536.178

Flow rate 25 l/min (3 bar)


Acoustic group I

Spray: Flow rate 12 l/min (3 bar)

Spray: Acoustic group I

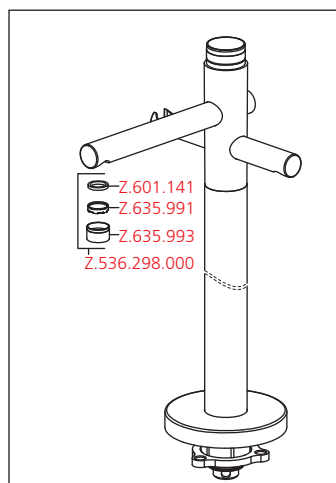


KWC-No. **Z.536.178** Concealed

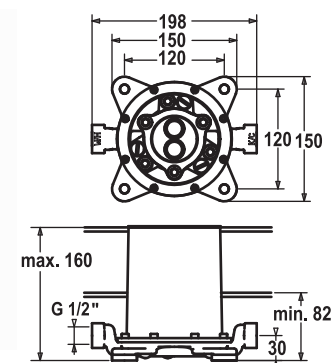

Accessories: technology and installation

Pre-assembly unit

- connecting thread 1/2"



KWC-No.	Finish
20.152.422.000	all chrome
AD 153 +/- 15 mm, A 135, with hand shower and hose	
20.152.442.000	all chrome
AD 153 +/- 15 mm, A 135, without hand shower and hose	

Tub

Lever mixer




- diverter with automatic reset
- intrinsically safe against backflow
- rotatable spout 60°
 - Neoperl®ac hé®
- KWC cartridge L 40
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- S-shaped connections 1/2" (covered) Z.535.949
- Scope of delivery:
 - hand shower KWC ELY mono 26.000.120.000
 - shower hose 1800 mm, plastic 26.001.014.000

Flow rate 20 l/min (3 bar)

Acoustic group I

Spray: Flow rate 12 l/min (3 bar)

Spray: Acoustic group I



KWC-No.	Finish
21.152.030.000	all chrome
AD 153 +/- 15 mm, with hand shower and hose	
21.152.330.000	all chrome
AD 153 +/- 15 mm, without hand shower and hose	







Shower


Lever mixer

- intrinsically safe against backflow
- KWC cartridge L 40
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- S-shaped connections 1/2" (covered) Z.535.949
- Scope of delivery:
 - hand shower KWC ELY mono 26.000.120.000
 - shower hose 1800 mm, plastic 26.001.014.000

Spray: Flow rate 12 l/min (3 bar)

Spray: Acoustic group I



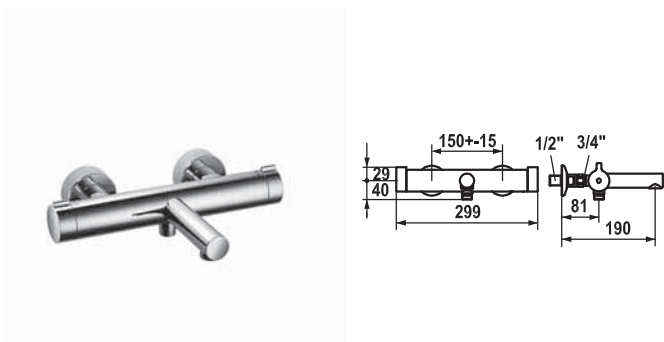





KWC-No. **20.152.503.000** Finish all chrome
AD 150 +/- 15 mm, A 190, without hand shower and hose

Tub Thermostat

Thermostat

- smartControl - water-saving device
- touchControl - the body of the mixer does not become hot
- hotControl - temperature handle with safety stop button 38°C
- turning handle to control flow and for diverter
- intrinsically safe against backflow
- fixed spout
 - Neoperl® aché®
- thermostatic precision control unit
 - constant water temperature (even when mains pressure fluctuates)
 - fast response
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44

Flow rate 21 l/min (3 bar)
Acoustic group II
Spray: Flow rate 15 l/min (3 bar)
Spray: Acoustic group I







KWC-No. **21.152.500.000** Finish all chrome
AD 150 +/- 15 mm, without hand shower and hose


Shower Thermostat

Thermostat

- smartControl - water-saving device
- touchControl - the body of the mixer does not become hot
- hotControl - temperature handle with safety stop button 38°C
- turning handle to control flow
- intrinsically safe against backflow
- thermostatic precision control unit
 - constant water temperature (even when mains pressure fluctuates)
 - fast response
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44

Spray: Flow rate 15 l/min (3 bar)
Spray: Acoustic group I





KWC-No.

Finish

26.156.213.000


all chrome

AD 150 +/- 15 mm, A 300, with hand shower and hose

Complete systems Thermostat

Shower system KWC ONO

- smartControl - water-saving device
- touchControl - the body of the mixer does not become hot
- touchControl - the water-bearing sliding wall bar does not become hot, can be shortened to any individual length as required
- touchControl - hand shower does not become hot
- swiveling bracket, shower head with ball joint
- hotControl - temperature handle with safety stop 38°C
- turning handle to control flow and for diverter
- KWC ball joint bracket, elevation adjustment lockable
- tube diameter 20 mm
- intrinsically safe against backflow
- easy to install on existing connections
- thermostatic precision control unit
 - constant water temperature (even when mains pressure fluctuates)
 - fast response
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44
- Scope of delivery:
 - thermostat incl. wall connections with outlet (top) for water-bearing sliding wall bar
 - hand shower KWC ELY mono 26.000.120.000
 - shower hose 1800 mm, plastic 26.001.014.000
 - shower head KWC PIATTO R240
 - sliding wall bar kit 26.004.003.000
 - shower guide rod holder (top), for connecting guide rod and spray arm










KWC-No.	Finish
20.154.280.000	all chrome
Trim kit	
20.154.290.000	all chrome
Trim kit, with vacuum breaker	

Tub

Trim kit with function unit

- outflow top and below
- pressure diversion
- diverter with automatic reset
- KWC cartridge L 40
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- Scope of delivery:
 - function unit, lever, cap, sleeve, cover plate, diverter
 - fastening of the cover plate without screws
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 21 l/min (3 bar)
Acoustic group I









KWC-No.	Finish
21.154.280.000	all chrome
Trim kit	


Shower

Trim kit with function unit

- outflow top or below
- KWC cartridge L 40
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- Scope of delivery:
 - function unit, lever, cap, sleeve, cover plate
 - fastening of the cover plate without screws
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 21 l/min (3 bar)
Acoustic group I





KWC-No.

20.154.480.000

Trim kit

Finish








all chrome

Tub Thermostat

Trim kit with thermostatic function unit

- outflow top and below
- pressure diversion
- hotControl - temperature handle with safety stop button 38°C
- diverter with automatic reset
- intrinsically safe against backflow
- Scope of delivery:
 - function unit, flow rate adjustment lever, temperature lever, sleeve, cover plate, holder for escutcheon
 - fastening of the cover plate without screws
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 21 l/min (3 bar)
Acoustic group I



KWC-No.

21.154.480.000

Trim kit

Finish







all chrome


Shower Thermostat

Trim kit with thermostatic function unit

- outflow top or below
- hotControl - temperature handle with safety stop button 38°C
- intrinsically safe against backflow
- Scope of delivery:
 - function unit, flow rate adjustment lever, temperature lever, sleeve, cover plate, holder for escutcheon, diverter
 - fastening of the cover plate without screws
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 21 l/min (3 bar)
Acoustic group I






KWC-No. **21.154.240.000**
Concealed

Finish all chrome

Shower, Thermostat

Trim kit for thermostatic valve

- without diverter
- without volume control
- hotControl - temperature handle with safety stop button 38°C
- intrinsically safe against backflow
- To be ordered separately:
 - unit for concealed installation ¾" 39.152.320.000




KWC-No. **39.152.320.000**
Concealed

Finish all chrome

Accessories: technology and installation, Thermostat

Thermostat

- Concealed unit
- without diverter
- without volume control
- connecting thread ¾"



KWC-No. **26.151.073.000**
A 200

Finish all chrome


Additional accessories

Bathtub spout

- fixed spout
 - Neoperl®ac hé®
- connecting thread ½"
- Suitable for:
 - KWON O

Acoustic group I

www.kwc.com



KWC-No.

Finish

27.150.050.000

all chrome

Trim kit


Additional accessories

Trim kit

- for shut-off valve
- for multiport diverter
- for multiport shut-off valve

▪ To be ordered separately:

- shut-off valve ½" K.38.93.00.931.34
- shut-off valve ¾" K.38.H3.70.931A35
- multiport diverter ¾" 39.990.010.931
- multiport shut-off valve ½" 39.990.011.931



KWC-No.

Finish

K.38.93.00.931.34


G ½", Concealed

K.38.H3.70.931A35

G ¾", Concealed

Accessories: technology and installation

Concealed unit for shut-off valve



KWC-No.

Finish


39.990.011.931

G ½", Concealed

Accessories: technology and installation

Concealed unit for multiport shut-off valve

- with shut-off valve
- 1 mixed water inlet, 2 outlets
- connecting thread ½"



KWC-No.

Finish


39.990.010.931

G ¾", Concealed

Accessories: technology and installation

Concealed unit for multiport diverter

- without shut-off valve
- 1 mixed water inlet, 3 outlets
- connecting thread ¾"

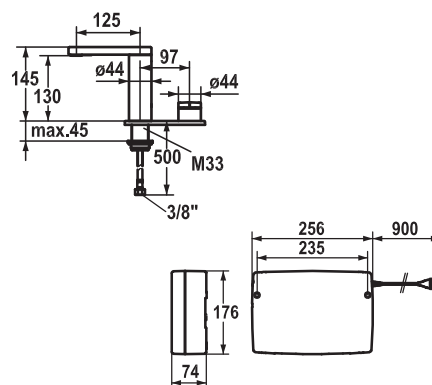

KWC-No.

Finish

12.651.021.000FL

all chrome

A 125, flexible connection hoses, without pop-up valve, mains receiver

Basin with LED-technology


Electronic controlled

- touch light PRO technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- microprocessor-control
 - tip'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- swivel spout 360°
 - Neoperl® LIM ®
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Scope of delivery:

- mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
- control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - (if necessary) extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 12 l/min (3 bar)
Acoustic group I

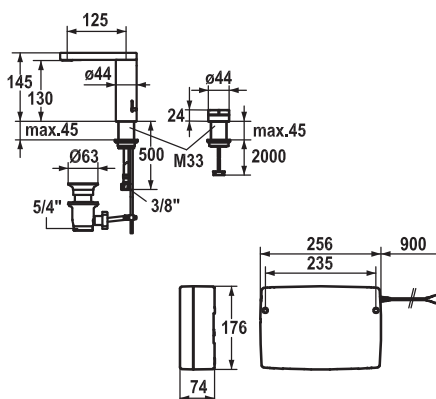


KWC-No.	Finish
12.652.011.000FL	all chrome
A 125, flexible connection hoses, with pop-up valve, mains receiver	

Basin with LED-technology

Electronic controlled

- touch light PRO technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- 2-hole
- microprocessor-control
 - tip'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- swivel spout 360°
 - Neoperl® LIM ®
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

- Scope of delivery:
 - mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
 - control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - (if necessary) extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

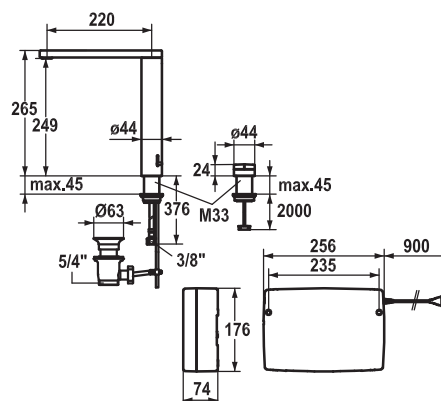

KWC-No.	Finish
12.652.012.000FL	all chrome
A 220, flexible connection hoses, with pop-up valve, mains receiver	
12.652.122.000FL	all chrome
A 220, flexible connection hoses, without pop-up valve, mains receiver	

Basin with LED-technology


Electronic controlled

- touch light PRO technology
- for vessel basin
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- 2-hole
- microprocessor-control
 - tip'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- swivel spout 360°
 - Neoperl® LIM ®
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size 35 mm

Scope of delivery:

- mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
- control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - (if necessary) extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 9 l/min (3 bar)
Acoustic group I

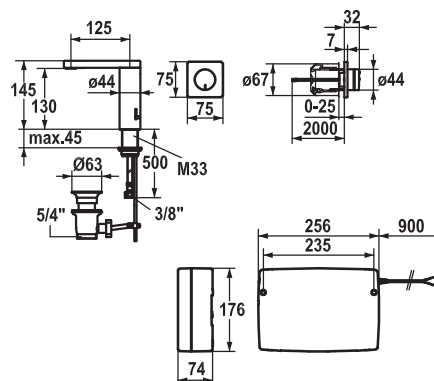


KWC-No.	Finish
12.651.031.000FL	all chrome
A 125, flexible connection hoses, with pop-up valve, mains receiver	
Z.636.183	
Concealed	

Basin with LED-technology

Electronic controlled

- touch light PRO technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- microprocessor-control
 - tip'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- swivel spout 360°
 - Neoperl® LIM ®
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

- Scope of delivery:
 - mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
 - control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - (if necessary) extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
 - rough in for operating unit Z.636.183
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

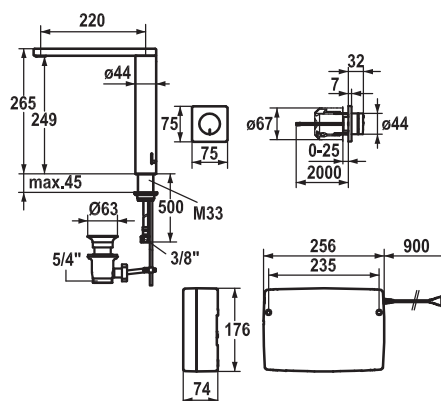

KWC-No.	Finish
12.651.032.000FL	all chrome
A 220, flexible connection hoses, with pop-up valve, mains receiver	
12.651.132.000FL	all chrome
A 220, flexible connection hoses, without pop-up valve, mains receiver	
Z.636.183	
Concealed	


Basin with LED-technology

Electronic controlled

- touch light PRO technology
- for vessel basin
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- microprocessor-control
 - tip'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- swivel spout 360°
 - Neoperl® L IM®
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

- Scope of delivery:
 - mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
 - control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - (if necessary) extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
 - rough in for operating unit Z.636.183
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 9 l/min (3 bar)
Acoustic group I

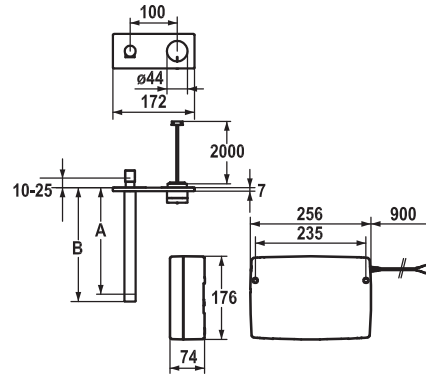


KWC-No.	Finish
11.654.003.000	all chrome
A 175, mains receiver, Trim kit	
11.654.004.000	all chrome
A 225, mains receiver, Trim kit	

Kitchen Basin with LED-technology

Electronic controlled

- touch light PRO technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- microprocessor-control
 - tip'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
 - tip'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 10 minutes
 - temperature limit can be adjusted
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- fixed spout
 - Neoperl® LIM ®
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- connecting thread 1/2"
- flexible connection hoses 3/8"

- Scope of delivery:
 - mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
 - control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
 - unit for concealed installation 39.004.500.931
 - (if necessary) extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

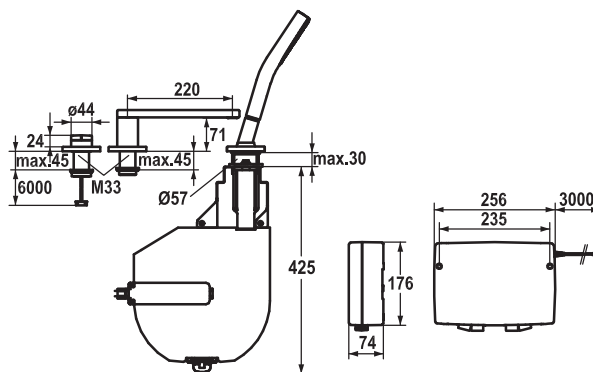

KWC-No.

Finish

20.657.023.000

all chrome

A 220, power supply for concealed installation, Trim kit

**Tub
Thermostat
with LED-technology**

Electronic controlled

- touch light PRO technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- microprocessor-control
 - tip'n'flow 1: 12°C, 100% flow rate can be individually adjusted and saved
 - tip'n'flow 2: 25°C, 100% flow rate can be individually adjusted and saved
 - tip'n'flow 3: 38°C, 100% flow rate can be individually adjusted and saved
 - temperatures above 40°C cannot be saved due to EU regulations
 - with cleaning programme
 - duration of water flow - adjustable, max. 45 minutes (then switches off automatically)
 - switching between two outlets possible (bath/hand shower)
 - overrule of the 40°C limit possible
 - if the temperature falls below 37°C, the 40°C limit is reactivated
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- swivel spout 360°
 - Neoperl® LIM ®
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- connecting thread ½"


- Scope of delivery:
 - control unit and wired operating unit / cable length 6000 mm
 - power supply 100-240 V (without plug / operating voltage 15 V / cable length 3000 mm
 - bathtub pout
 - hose box with automatic hose rewind and hand shower
- To be ordered separately:
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
 - (optional) installation and inspection box 39.000.510.931
 - (optional) bypass for pressure testing and rinsing Z.536.405
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 17 l/min (3 bar)

Acoustic group I

Spray: Flow rate 12 l/min (3 bar)

Spray: Acoustic group I

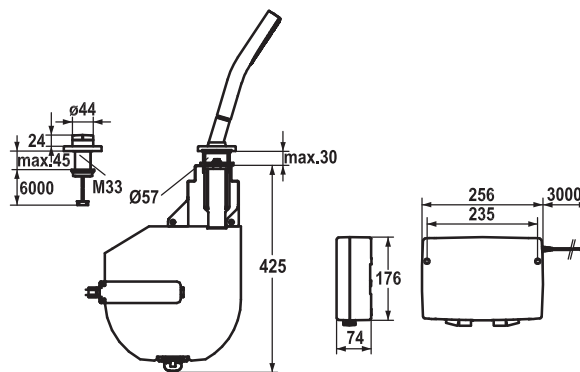

KWC-No.

Finish

20.657.120.000

all chrome

power supply for concealed installation, Trim kit


**Tub
Thermostat
with LED-technology**

Electronic controlled

- touch light PRO technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- microprocessor-control
 - tip'n'flow 1: 12°C, 100% flow rate can be individually adjusted and saved
 - tip'n'flow 2: 25°C, 100% flow rate can be individually adjusted and saved
 - tip'n'flow 3: 38°C, 100% flow rate can be individually adjusted and saved
 - temperatures above 40°C cannot be saved due to EU regulations
 - with cleaning programme
 - duration of water flow - adjustable, max. 45 minutes (then switches off automatically)
 - switching between two outlets possible (bath/hand shower)
 - overrule of the 40°C limit possible
 - if the temperature falls below 37°C, the 40°C limit is reactivated
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- connecting thread ½"

- Scope of delivery:
 - control unit and wired operating unit / cable length 6000 mm
 - power supply 100-240 V (without plug / operating voltage 15 V / cable length 3000 mm
 - hose box with automatic hose rewind and hand shower
- To be ordered separately:
 - Z.535.067.000 installation kit, bathtub and pop-up waste fittings
 - Z.535.068.000 installation kit, bathtub and pop-up-waste fittings, extended overflow for special bathtubs
 - Z.535.069 connection hose for installation kit (necessary for Z.535.067.000 or Z.535.068.000)
 - Z.535.070.000 trim kit for installation kit Z.535.067.000 or Z.535.068.000
 - Z.535.071 pipe disconnector (necessary for Z.535.067.000 or Z.535.068.000)
 - Z.634.456.000 trim kit for pipe disconnector Z.535.071
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
 - (optional) installation and inspection box 39.000.510.931
 - (optional) bypass for pressure testing and rinsing Z.536.405
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 22 l/min (3 bar)
Spray: Flow rate 12 l/min (3 bar)
Spray: Acoustic group I

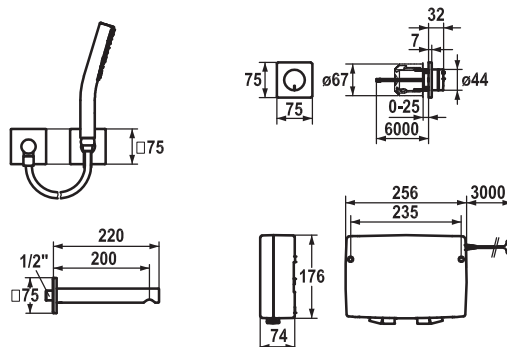

KWC-No.

Finish

20.657.234.000

all chrome

A 200, power supply for concealed installation, with hand shower, hose and bracket. Trim kit

Z.636.183

Concealed

**Tub
Thermostat
with LED-technology**

Electronic controlled


- electronic controlled
 - touch light PRO technology
 - tip'n'flow 1-2-3
 - 3 preset temperatures and flow rates
 - microprocessor-control
 - tip'n'flow 1: 12°C, 100% flow rate can be individually adjusted and saved
 - tip'n'flow 2: 25°C, 100% flow rate can be individually adjusted and saved
 - tip'n'flow 3: 38°C, 100% flow rate can be individually adjusted and saved
 - temperatures above 40°C cannot be saved due to EU regulations
 - with cleaning programme
 - duration of water flow - adjustable, max. 45 minutes (then switches off automatically)
 - switching between two outlets possible (bath/hand shower)
 - overrule of the 40°C limit possible
 - if the temperature falls below 37°C, the 40°C limit is reactivated
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
 - fixed spout
 - Neoperl® LIM ®
 - touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
 - connecting thread ½"
- scope of delivery:
- control unit and wired operating unit / cable length 6000 mm
 - power supply 100-240 V (without plug / operating voltage 15 V / cable length 3000 mm
 - bathtub spout
 - hose connection
- To be ordered separately:
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
 - (optional) installation and inspection box 39.000.510.931
 - (optional) bypass for pressure testing and rinsing Z.536.405
 - rough in for operating unit Z.636.183
 - Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 18 l/min (3 bar)

Acoustic group I

Spray: Flow rate 12 l/min (3 bar)

Spray: Acoustic group I

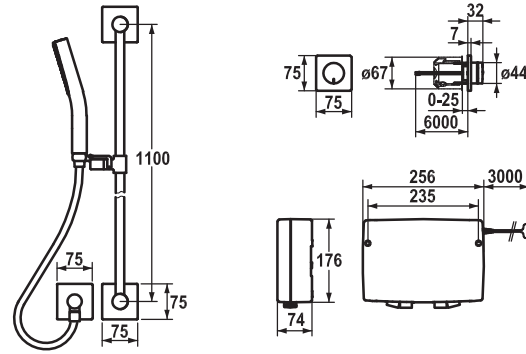

KWC-No.

Finish

21.654.010.000

all chrome

L 1100, power supply for concealed installation, with hand shower, hose and bracket, Trim kit

Z.636.183

Concealed

Shower Thermostat with LED-technology


Electronic controlled

- touch light PRO technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- microprocessor-control
 - tip'n'flow 1: 12°C, 80% flow rate can be individually adjusted and saved
 - tip'n'flow 2: 25°C, 80% flow rate can be individually adjusted and saved
 - tip'n'flow 3: 38°C, 80% flow rate can be individually adjusted and saved
 - temperatures above 40°C cannot be saved due to EU regulations
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 45 minutes
 - overrule of the 40°C limit possible
 - if the temperature falls below 37°C, the 40°C limit is reactivated
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- connecting thread ½"

Scope of delivery:

- control unit and wired operating unit / cable length 6000 mm
- power supply 100-240 V (without plug / operating voltage 15 V / cable length 3000 mm)
- hose connection
- sliding wall bar
- To be ordered separately:
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
 - (optional) installation and inspection box 39.000.510.931
 - (optional) bypass for pressure testing and rinsing Z.536.405
 - rough in for operating unit Z.636.183
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Spray: Flow rate 12 l/min (3 bar)
Spray: Acoustic group I

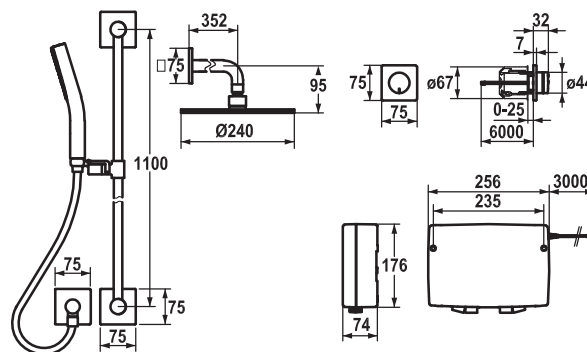

KWC-No.

Finish

21.654.020.000

all chrome

L 612, power supply for concealed installation, with hand shower, hose and bracket, Trim kit

Z.636.183

Concealed


Shower Thermostat with LED-technology

Electronic controlled

- touch light PRO technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- microprocessor-control
 - tip'n'flow 1: 12°C, 80% flow rate can be individually adjusted and saved
 - tip'n'flow 2: 25°C, 80% flow rate can be individually adjusted and saved
 - tip'n'flow 3: 38°C, 80% flow rate can be individually adjusted and saved
 - temperatures above 40°C cannot be saved due to EU regulations
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 45 minutes
 - switching between two outlets possible (hand shower/shower head)
 - overrule of the 40°C limit possible
 - if the temperature falls below 37°C, the 40°C limit is reactivated
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- connecting thread ½"

- Scope of delivery:
 - control unit and wired operating unit / cable length 6000 mm
 - power supply 100-240 V (without plug / operating voltage 15 V / cable length 3000 mm)
 - showerhead
 - hose connection
 - sliding wall bar
- To be ordered separately:
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
 - (optional) installation and inspection box 39.000.510.931
 - (optional) bypass for pressure testing and rinsing Z.536.405
 - rough in for operating unit Z.636.183
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Spray: Flow rate 12 l/min (3 bar)
Spray: Acoustic group I

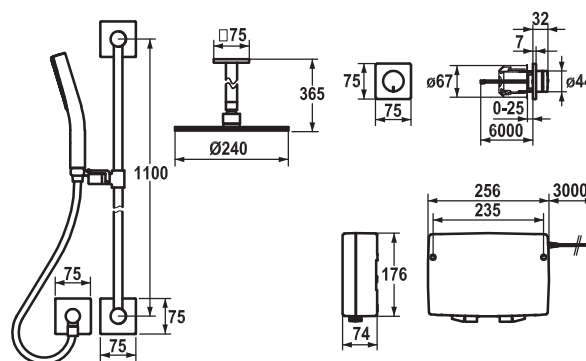

KWC-No.	Finish
21.654.030.000	all chrome
L 612, power supply for concealed installation, with hand shower, hose and bracket, Trim kit	
Z.636.183	Concealed


Shower Thermostat with LED-technology

Electronic controlled

- touch light PRO technology
- tip'n'flow 1-2-3
- 3 preset temperatures and flow rates
- microprocessor-control
 - tip'n'flow 1: 12°C, 80% flow rate can be individually adjusted and saved
 - tip'n'flow 2: 25°C, 80% flow rate can be individually adjusted and saved
 - tip'n'flow 3: 38°C, 80% flow rate can be individually adjusted and saved
 - temperatures above 40°C cannot be saved due to EU regulations
 - with cleaning programme
 - duration of water flow - safety indication: switch off automatically after 45 minutes
 - switching between two outlets possible (hand shower/shower head)
 - overrule of the 40°C limit possible
 - if the temperature falls below 37°C, the 40°C limit is reactivated
 - hot water disinfection (5 minutes) can be adjusted
 - can be restored to factory settings
- touch light PRO control unit, maintenance-free
 - up-to-date microprocessor and drive technology
 - tried-and-tested valve technology
 - incl. installation materials
 - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- connecting thread ½"

- Scope of delivery:
 - control unit and wired operating unit / cable length 6000 mm
 - power supply 100-240 V (without plug / operating voltage 15 V / cable length 3000 mm
 - showerhead
 - hose connection
 - sliding wall bar
- To be ordered separately:
 - (optional) KWC ONO touch light PRO wireless operating unit Z.536.351.000
 - (optional) installation and inspection box 39.000.510.931
 - (optional) bypass for pressure testing and rinsing Z.536.405
 - rough in for operating unit Z.636.183
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Spray: Flow rate 12 l/min (3 bar)
Spray: Acoustic group I



KWC-No.

Finish

Z.536.351.000

mains receiver

all chrome


Additional accessories, with LED-technology

KWC ONO touch light PRO wireless operating unit, with charging station

– rechargeable battery life 3-4 months

▪ Scope of delivery:

– mains receiver 100-240 V / operating voltage 6.75 V / cable length 800 mm



KWC-No.

Finish


Z.636.183

Concealed

Accessories: technology and installation

Rough in for touch light PRO operating unit, plastic

– suitable for installation on brickwork or cavity walls



KWC-No.

Finish

39.000.510.931

Concealed

Accessories: technology and installation

Installation and inspection box, stainless


– consists of intallation box, frame and screwless cover

– installation depth continuously adjustable

– includes installation materials

▪ To be ordered separately:

– (optional) bypass for pressure testing and rinsing
Z.536.405



KWC-No.

Finish


39.004.500.931

Concealed

Accessories: technology and installation

Concealed unit wall two hole

▪ connecting thread 1/2"



KWC-No.


Finish

Z.536.405

Accessories: technology and installation

Bypass for pressure testing and rinsing

- connecting thread 1/2"
- Suitable for:
 - installation and inspection box 39.000.510.931



KWC-No.

Finish

Z.536.352


all chrome

G 3/8"

Accessories: technology and installation

extension set

- comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material

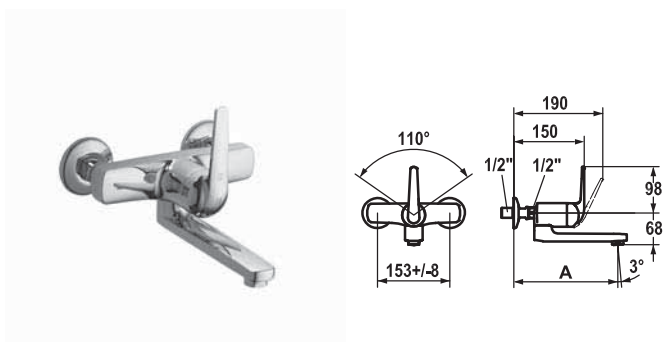







KWC-No.	Finish
11.062.002.000 AD 153 +/- 8 mm, A 175	all chrome
11.062.003.000 AD 153 +/- 8 mm, A 225	all chrome

Basin

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- swivel spout 90°
 - adjustable with screw
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- wall connections ½" x ½", without shut-off valve L 40 eccentric 4 mm. K.30.99.01.000.43

Flow rate 7.5 l/min (3 bar)
Acoustic group I

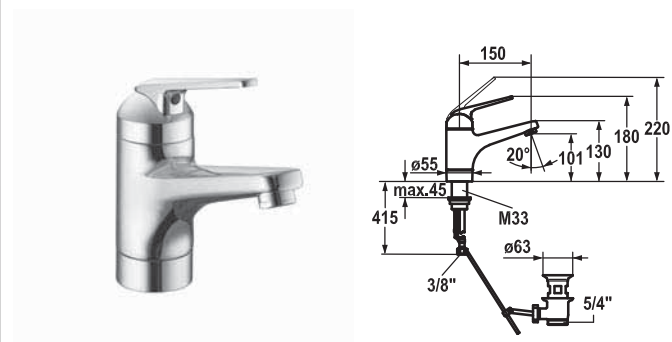





KWC-No.	Finish
12.061.011.000FL	all chrome
A 150, flexible connection hoses, with pop-up valve	
12.061.021.000FL	all chrome
A 150, flexible connection hoses, without pop-up valve	


Basin

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- swivel spout 90°
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size $\varnothing 35$ mm

Flow rate 7.5 l/min (3 bar)
Acoustic group I





KWC-No.

Finish

12.068.011.000FL

all chrome

A 150, flexible connection hoses, with pop-up valve

12.068.021.000FL

all chrome

A 150, flexible connection hoses, without pop-up valve






Basin

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- swivel spout 90°
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 6 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

12.061.041.000FL

all chrome

A 120, flexible connection hoses, with pop-up valve

12.061.051.000FL

all chrome

A 120, flexible connection hoses, without pop-up valve





Basin


Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I





KWC-No.

Finish

12.061.031.000FL

all chrome

A 120, flexible connection hoses, with pop-up valve

12.061.071.000FL

all chrome

A 120, flexible connection hoses, without pop-up valve

Basin






cold water flow in central lever position

Lever mixer

- COOLFIX - cold water flow in central lever position
- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

12.068.041.000FL

all chrome

A 120, flexible connection hoses, with pop-up valve

12.068.051.000FL

all chrome

A 120, flexible connection hoses, without pop-up valve





Basin


Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate 6 l/min (3 bar)

Acoustic group I





KWC-No.

Finish

12.061.042.000FL

all chrome

A 150, flexible connection hoses, with pop-up valve

12.061.052.000FL

all chrome

A 150, flexible connection hoses, without pop-up valve






Basin

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hose 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

12.061.032.000FL

all chrome

A 150, flexible connection hoses, with pop-up valve

12.061.072.000FL

all chrome

A 150, flexible connection hoses, without pop-up valve

Basin





cold water flow in central lever position


Lever mixer

- COOLFIX - cold water flow in central lever position
- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hose 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I





KWC-No.

Finish

12.068.042.000FL

all chrome

A 150, flexible connection hoses, with pop-up valve

12.068.052.000FL

all chrome

A 150, flexible connection hoses, without pop-up valve






Basin

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hose 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 6 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

12.061.372.000FL

all chrome

A 150, flexible connection hoses, without pop-up valve





Basin


Lever mixer

- for vessel basin
- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I





KWC-No.

Finish

12.061.382.000FL

all chrome

A 150, flexible connection hoses, without pop-up valve

Basin






cold water flow in central lever position

Lever mixer

- for vessel basin
- COOLFIX - cold water flow in central lever position
- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size $\varnothing 35$ mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

12.061.092.000FL

all chrome

A 150, flexible connection hoses, without pop-up valve





Basin


Lever mixer

- for vessel basin
- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® cascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size $\varnothing 35$ mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I






KWC-No.

Finish

12.061.102.000FL

all chrome

A 150, flexible connection hoses, without pop-up valve



KWC-No.

Finish

13.061.041.000FL

all chrome

A 110, flexible connection hoses, with pop-up valve

Basin

cold water flow in central lever position

Lever mixer

- for vessel basin
- COOLFIX - cold water flow in central lever position
- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® ascade®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size $\varnothing 35$ mm





Bidet

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - ball joint aerator Neoperl® Caché®
- KWC cartridge L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size $\varnothing 35$ mm





Flow rate 7.5 l/min (3 bar)


Acoustic group I



Flow rate 8 l/min (3 bar)

Acoustic group I













KWC-No.	Finish
20.064.400.000	all chrome
Trim kit	
20.064.410.000	all chrome
Trim kit, with vacuum breaker	

Tub

Trim kit with function unit

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- outflow top and below
- pressure diversion
- diverter with automatic reset
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperaturēm itation
- Scope of delivery:
 - function unit, lever, cap, sleeve, cover plate, diverter
 - fastening of the cover plate without screws
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 27 l/min (3 bar)
Acoustic group I









KWC-No.	Finish
21.064.400.000	all chrome
Trim kit	


Shower

Trim kit with function unit

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- outflow top or below
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperaturēm itation
- Scope of delivery:
 - function unit, lever, cap, sleeve, cover plate
 - fastening of the cover plate without screws
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 27 l/min (3 bar)
Acoustic group I





KWC-No.

20.064.480.000

Trim kit

Finish








all chrome

Tub Thermostat

Trim kit with thermostatic function unit

- outflow top and below
- pressure diversion
- hotControl - temperature handle with safety stop button 38°C
- diverter with automatic reset
- intrinsically safe against backflow
- Scope of delivery:
 - function unit, flow rate adjustment lever, temperature lever, sleeve, cover plate, holder for escutcheon
 - fastening of the cover plate without screws
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 25 l/min (3 bar)
Acoustic group I



KWC-No.

21.064.480.000

Trim kit

Finish







all chrome


Shower Thermostat

Trim kit with thermostatic function unit

- outflow top or below
- hotControl - temperature handle with safety stop button 38°C
- intrinsically safe against backflow
- Scope of delivery:
 - function unit, flow rate adjustment lever, temperature lever, sleeve, cover plate, holder for escutcheon, diverter
 - fastening of the cover plate without screws
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 25 l/min (3 bar)
Acoustic group I










KWC-No.	Finish
11.282.002.000	all chrome
AD 153 +/- 8 mm, A 175	
11.282.003.000	all chrome
AD 153 +/- 8 mm, A 225	
11.282.004.000	all chrome
AD 153 +/- 8 mm, A 300	

Basin

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- swivel spout 90°
 - adjustable with screw
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- wall connections 1/2" x 1/2", with shut-off valve L 40 eccentric 4 mm, K.30.90.01.000.43

Flow rate 7.5 l/min (3 bar)
Acoustic group I







KWC-No.	Finish
12.281.041.000FL	all chrome
A 120, flexible connection hoses, with pop-up valve	
12.281.051.000FL	all chrome
A 120, flexible connection hoses, without pop-up valve	


Basin

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 7.5 l/min (3 bar)
Acoustic group I





KWC-No.

Finish

12.281.031.000FL

all chrome

A 120, flexible connection hoses, with pop-up valve

12.281.071.000FL

all chrome

A 120, flexible connection hoses, without pop-up valve

Basin






cold water flow in central lever position

Lever mixer

- COOLFIX - cold water flow in central lever position
- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

12.288.041.000FL

all chrome

A 120, flexible connection hoses, with pop-up valve

12.288.051.000FL

all chrome

A 120, flexible connection hoses, without pop-up valve





Basin


Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate 6 l/min (3 bar)

Acoustic group I





KWC-No.

Finish

12.281.042.000FL

all chrome

A 150, flexible connection hoses, with pop-up valve

12.281.052.000FL

all chrome

A 150, flexible connection hoses, without pop-up valve






Basin

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

12.281.032.000FL

all chrome

A 150, flexible connection hoses, with pop-up valve

12.281.072.000FL

all chrome

A 150, flexible connection hoses, without pop-up valve

Basin





cold water flow in central lever position


Lever mixer

- COOLFIX - cold water flow in central lever position
- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size Ø35 mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I





KWC-No.

Finish

12.288.042.000FL

all chrome

A 150, flexible connection hoses, with pop-up valve

12.288.052.000FL

all chrome

A 150, flexible connection hoses, without pop-up valve






Basin

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses $\frac{3}{8}$ "
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size $\varnothing 35$ mm

Flow rate 6 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

20.282.313.000

all chrome

AD 153 +/- 8 mm, A 170, without hand shower and hose

Tub

Lever mixer






- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- intrinsically safe against backflow
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- wall connections $\frac{1}{2}$ " x $\frac{3}{4}$ ", with shut-off valve L 40 eccentric 4 mm, K.30.90.01.000.44


Flow rate 21 l/min (3 bar)

Acoustic group I

Spray: Flow rate 18 l/min (3 bar)

Spray: Acoustic group I





KWC-No.

Finish

21.282.310.000

all chrome

AD 153 +/- 8 mm, without hand shower and hose





Shower


Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- intrinsically safe against backflow
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- wall connections 1/2" x 1/2", with shut-off valve L 40 eccentric 4 mm, K.30.90.01.000.43

Spray: Flow rate 18 l/min (3 bar)

Spray: Acoustic group I



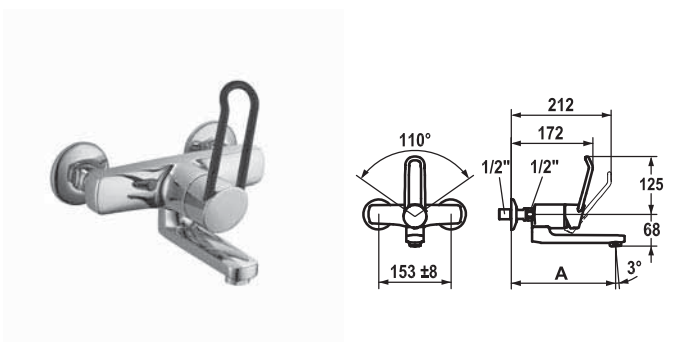






KWC-No.	Finish
11.292.002.000	all chrome
AD 153 +/- 8 mm, A 175	
11.292.003.000	all chrome
AD 153 +/- 8 mm, A 225	
11.292.004.000	all chrome
AD 153 +/- 8 mm, A 300	

Basin

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=125 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- swivel spout 90°
 - adjustable with screw
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- wall connections 1/2" x 1/2", with shut-off valve L 40 eccentric 4 mm, K.30.90.01.000.43

Flow rate 7.5 l/min (3 bar)
Acoustic group I

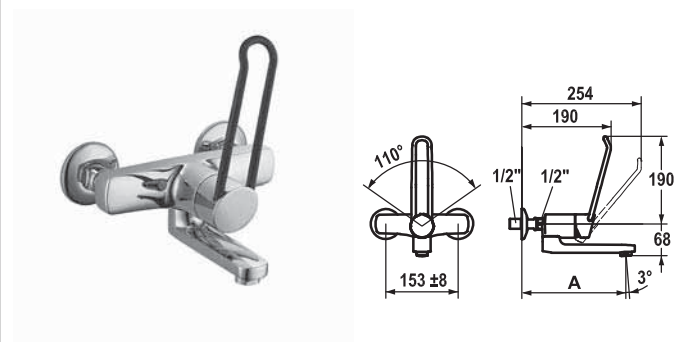






KWC-No.	Finish
11.292.002.000LL	all chrome
AD 153 +/- 8 mm, A 175, with long lever	
11.292.003.000LL	all chrome
AD 153 +/- 8 mm, A 225, with long lever	
11.292.004.000LL	all chrome
AD 153 +/- 8 mm, A 300, with long lever	


Basin

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=190 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- swivel spout 90°
 - adjustable with screw
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- wall connections 1/2" x 1/2", with shut-off valve L 40 eccentric 4 mm, K.30.90.01.000.43

Flow rate 7.5 l/min (3 bar)
Acoustic group I










KWC-No.	Finish
12.291.041.000FL	all chrome
A 120, flexible connection hoses, with pop-up valve	
12.291.051.000FL	all chrome
A 120, flexible connection hoses, without pop-up valve	

Basin

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=125 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 7.5 l/min (3 bar)
Acoustic group I



KWC-No.	Finish
12.291.031.000FL	all chrome
A 120, flexible connection hoses, with pop-up valve	
12.291.071.000FL	all chrome
A 120, flexible connection hoses, without pop-up valve	





Basin


cold water flow in central lever position

Lever mixer

- COOLFIX - cold water flow in central lever position
- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=125 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 7.5 l/min (3 bar)
Acoustic group I





KWC-No.

Finish

12.291.041.000LLFL

all chrome

A 120, flexible connection hoses, with pop-up valve, with long lever

12.291.051.000LLFL

all chrome

A 120, flexible connection hoses, without pop-up valve, with long lever






Basin

Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=190 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

12.291.042.000FL

all chrome

A 150, flexible connection hoses, with pop-up valve

12.291.052.000FL

all chrome

A 150, flexible connection hoses, without pop-up valve





Basin


Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=125 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I





KWC-No.

Finish

12.291.032.000FL

all chrome

A 150, flexible connection hoses, with pop-up valve

12.291.072.000FL

all chrome

A 150, flexible connection hoses, without pop-up valve

Basin






cold water flow in central lever position

Lever mixer

- COOLFIX - cold water flow in central lever position
- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=125 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I



KWC-No.

Finish

12.291.042.000LLFL

all chrome

A 150, flexible connection hoses, with pop-up valve, with long lever

12.291.052.000LLFL

all chrome

A 150, flexible connection hoses, without pop-up valve, with long lever





Basin


Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=190 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- flexible connection hoses 3/8"
- fastening by means of threaded sleeve M33 x 1.5
- mounting hole size ø35 mm

Flow rate 7.5 l/min (3 bar)

Acoustic group I



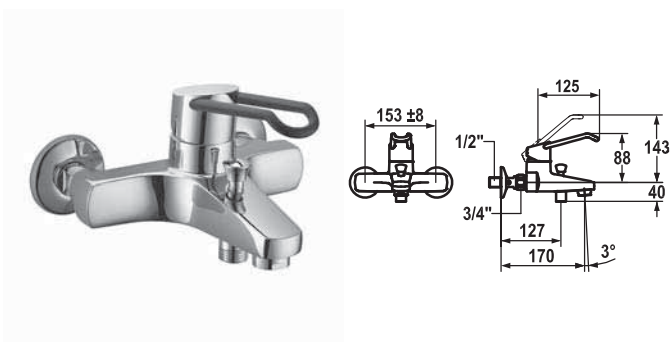

KWC-No. **20.292.313.000** Finish all chrome
AD 153 +/- 8 mm, A 170, without hand shower and hose

Tub

Lever mixer






- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=125 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- intrinsically safe against backflow
- fixed spout
 - Neoperl® Perlator® laminar
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- wall connections 1/2" x 3/4", with shut-off valve L 40 eccentric 4 mm, K.30.90.01.000.44

Flow rate 21 l/min (3 bar)

Acoustic group I

Spray: Flow rate 18 l/min (3 bar)

Spray: Acoustic group I



KWC-No. **21.292.310.000** Finish all chrome
AD 153 +/- 8 mm, without hand shower and hose





Shower


Lever mixer

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=125 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- intrinsically safe against backflow
- KWC cartridge with safety device L 39 - universal
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- wall connections 1/2" x 1/2", with shut-off valve L 40 eccentric 4 mm, K.30.90.01.000.43

Spray: Flow rate 14 l/min (3 bar)

Spray: Acoustic group I





KWC-No.

Finish

20.292.503.000

all chrome

AD 150 +/- 15 mm, A 190, without hand shower and hose

Tub Thermostat

Thermostat






- Operation designed for a secure grip, as well as safe and easy handling
- smartControl - water-saving device
- touchControl - the body of the mixer does not become hot
- hotControl - temperature handle with safety stop button 38°C
- diverter with automatic reset
- turning handle to control flow and for diverter
- intrinsically safe against backflow
- fixed spout
 - Neoperl® Perlator® laminar
- thermostatic precision control unit
 - constant water temperature (even when mains pressure fluctuates)
 - fast response
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44

Flow rate 21 l/min (3 bar)

Acoustic group I

Spray: Flow rate 14 l/min (3 bar)

Spray: Acoustic group I



KWC-No.

Finish

21.292.500.000

all chrome

AD 150 +/- 15 mm, without hand shower and hose





Shower Thermostat


Thermostat

- Operation designed for a secure grip, as well as safe and easy handling
- smartControl - water-saving device
- touchControl - the body of the mixer does not become hot
- hotControl - temperature handle with safety stop button 38°C
- turning handle to control flow
- intrinsically safe against backflow
- thermostatic precision control unit
 - constant water temperature (even when mains pressure fluctuates)
 - fast response
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44

Spray: Flow rate 14 l/min (3 bar)

Spray: Acoustic group I



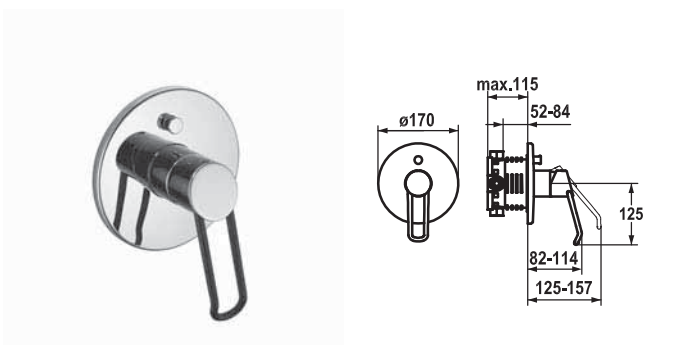








KWC-No. **20.294.400.000**
Trim kit
Finish all chrome

Tub

Trim kit with function unit

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=125 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- outflow top and below
- pressure diversion
- diverter with automatic reset
- KWC cartridge XL 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature limitation
- Scope of delivery:
 - function unit, lever, cap, sleeve, cover plate, diverter
 - fastening of the cover plate without screws
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 27 l/min (3 bar)
Acoustic group I

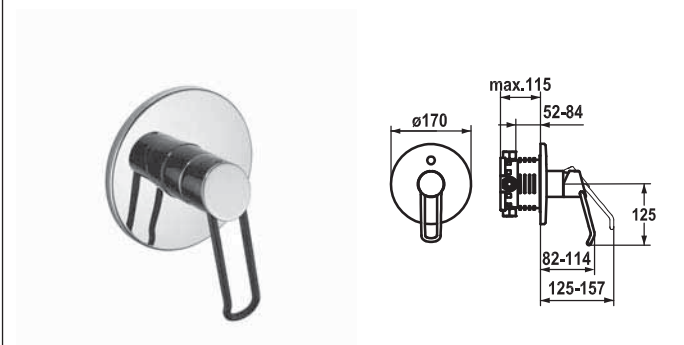







KWC-No. **21.294.400.000**
Trim kit
Finish all chrome


Shower

Trim kit with function unit

- Sealing membrane between lever and cap: protects the inside of the faucet
 - to prevent liquid penetrating from outside
- Operation designed for a secure grip, as well as safe and easy handling
- ergonomic and robust operating lever, L=125 mm, made of polyamide
 - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- outflow top or below
- KWC cartridge with safety device L 46 - high capacity
 - with ceramic discs
 - flow rate and temperature continuously variable
 - temperature and flow rate limitation
- Scope of delivery:
 - function unit, lever, cap, sleeve, cover plate
- To be ordered separately:
 - unit for concealed installation KWC VAROX ½" 39.999.300.931, with shut-off valves

Flow rate 27 l/min (3 bar)
Acoustic group I














KWC-No.	Finish
12.661.403.700FL	stainless steel
A 155, flexible connection hoses, without pop-up valve, battery	
12.661.403.750FL	polished stainless steel
A 155, flexible connection hoses, without pop-up valve, battery	
12.661.413.700FL	stainless steel
A 155, flexible connection hoses, without pop-up valve, mains receiver	
12.661.413.750FL	polished stainless steel
A 155, flexible connection hoses, without pop-up valve, mains receiver	

Basin low-contact with LUMINAQUA® LED-technology

- Automatic
- DDSA® sensor technology radiation-free
 - touch light
 - regulation by tapping
 - 1 x tapping - cold water, lighting color: blue
 - 2 x tapping - mix water, lighting color: orange
 - 3 x tapping - hot water, lighting color: red
 - 1 x tapping for 5 sec. - cleaning mode, lighting color: green
 - microprocessor-control
 - with cleaning programme
 - duration of water flow - 10 seconds
 - fixed spout
 - Neoperl® LIM ®
 - valve unit
 - two-way
 - control of three temperature grades
 - temperature limitation
 - water flow not adjustable
 - flexible connection hoses 3/8"
 - fastening by means of threaded sleeve M33 x 1.5
 - mounting hole size ø35 mm
 - Scope of delivery:
 - battery 1.5 V Alkaline AA LR6 (4x)
 - lifespan at 50 circuits/day: 1 year
 - mains receiver 100-240 V / operating voltage 6.5 V / cable length 1100 mm

Flow rate 6 l/min (3 bar)
Acoustic group I



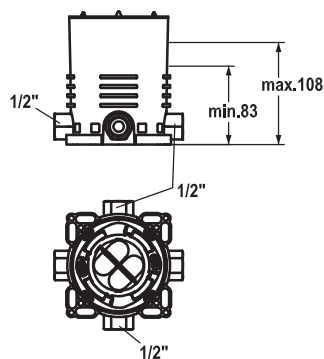

KWC-No.

Finish

39.999.300.931


Concealed

Accessories: technology and installation

Concealed unit compact

- integrated shut-off valves cold and hot water
- connecting thread 1/2" (stopper 1/2" incl. in delivery)
- Scope of delivery:
 - installation box and cover sleeve, plastic incl. sleeve gasket
 - Multifix fastening system
- To be ordered separately:
 - (if necessary) extension set 20 mm Z.535.719

Z.535.701



Z.535.702



Z.535.713



Z.535.712




Z.535.703




Z.535.719


20mm
(max. 2x20mm)
(optional)



Z.635.179




Z.635.180




Z.635.182


(optional)




(optional)



Z.536.001
ø170mm
x=12mm



Z.635.551
ø170mm



Z.635.552
ø170mm

Z.535.704





ShowerCulture	
KWC BOSSANOVA	162
KWC ELY	165
KWC Shower heads	167
KWC Shower arms	170
KWC Shower systems	174
KWC Shower brackets	182
KWC Sliding wall bars	183
KWC Sliding wall bar kits	184
KWC Hose connections	186
KWC Shower hoses	188



KWC-No.

26.000.110.040

Finish

chrome/urban grey

Hand showers Additional accessories



Hand shower KWC BOSSANOVA air

- touchControl - hand shower does not become hot
- angled hand shower hose connection, straight hose position
- ergoSkin - ergonomic grip, pleasant surface
- (AIR) water saving
- cleaning-friendly faceplate
- ecoJet
- connecting thread 1/2"

Spray: Flow rate 8 l/min (3 bar)
Spray: Acoustic group I



KWC-No.

26.000.111.040

Finish

chrome/urban grey

Hand showers Additional accessories




Hand shower KWC BOSSANOVA mono

- touchControl - hand shower does not become hot
- angled hand shower hose connection, straight hose position
- ergoSkin - ergonomic grip, pleasant surface
- cleaning-friendly faceplate
- fitJet
- connecting thread 1/2"

Spray: Flow rate 12 l/min (3 bar)
Spray: Acoustic group I






KWC-No.

26.000.112.040

Finish

chrome/urban grey



KWC-No.

26.000.112.041

Finish

chrome/harmonic blue

Hand showers

Additional accessories




Hand shower KWC BOSSANOVA duo

- touchControl - hand shower does not become hot
- angled hand shower hose connection, straight hose position
- ergoSkin - ergonomic grip, pleasant surface
- cleaning-friendly faceplate
- fitJet & spaJet
 - remains set to the last shower spray selected
- connecting thread 1/2"

Hand showers

Additional accessories



Hand shower KWC BOSSANOVA duo

- touchControl - hand shower does not become hot
- angled hand shower hose connection, straight hose position
- ergoSkin - ergonomic grip, pleasant surface
- cleaning-friendly faceplate
- fitJet & spaJet
 - remains set to the last shower spray selected
- connecting thread 1/2"

Spray: Flow rate 16 l/min (3 bar)

Spray: Acoustic group I



Spray: Flow rate 16 l/min (3 bar)

Spray: Acoustic group I





KWC-No.

26.000.112.042

Finish

chrome/fancy purple

Hand showers

Additional accessories




Hand shower KWC BOSSANOVA duo

- touchControl - hand shower does not become hot
- angled hand shower hose connection, straight hose position
- ergoSkin - ergonomic grip, pleasant surface
- cleaning-friendly faceplate
- fitJet & spaJet
 - remains set to the last shower spray selected
- connecting thread 1/2"

Spray: Flow rate 16 l/min (3 bar)

Spray: Acoustic group I



KWC-No.

26.000.112.043

Finish

chrome/midnight blue

Hand showers

Additional accessories



Hand shower KWC BOSSANOVA duo

- touchControl - hand shower does not become hot
- angled hand shower hose connection, straight hose position
- ergoSkin - ergonomic grip, pleasant surface
- cleaning-friendly faceplate
- fitJet & spaJet
 - remains set to the last shower spray selected
- connecting thread 1/2"

Spray: Flow rate 16 l/min (3 bar)

Spray: Acoustic group I






KWC-No.

26.000.120.000

Finish

all chrome

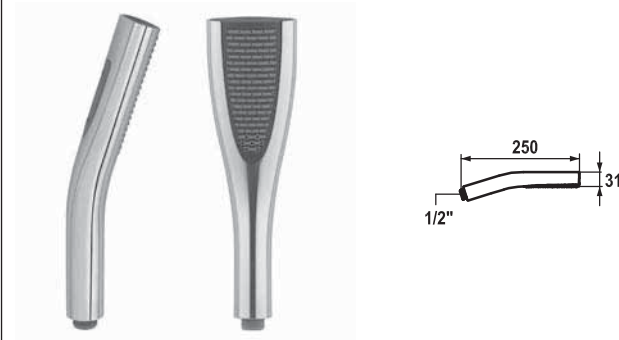

KWC-No.

26.000.121.000

Finish

all chrome

Hand showers

Additional accessories

Hand shower KWC ELY mono

- touchControl - hand shower does not become hot
- hand shower head angled, straight hose position
- cleaning-friendly faceplate
- fitJet
- connecting thread 1/2"



Hand showers

Additional accessories

Hand shower KWC ELY duo


- touchControl - hand shower does not become hot
- hand shower head angled, straight hose position
- cleaning-friendly faceplate
- fitJet & powerJet
 - automatically resets to fitJet after use
- connecting thread 1/2"



Spray: Flow rate 12 l/min (3 bar)
Spray: Acoustic group I





















Spray: Flow rate 12 l/min (3 bar)
Spray: Acoustic group I



The right combination

Many KWC products can be combined as desired to suit customers' individual tastes and requirements. The table below shows which shower heads (different models and sizes) can be combined with which overhead shower wall bars (wall or ceiling installation, a variety of lengths and escutcheons).


							
	L 352	L 352	L 352	L 385	L 485	L 125 L 225 L 325	L 90
 D 200	•	•	•	•	•	•	
 D 240	•	•	•	•	•	•	
 D 300				•	•	•	
 D 400				•	•	•	
 D 200x200	•	•	•	•	•	•	
 D 240x240	•	•	•	•	•	•	
 D 300x300				•	•	•	
 D 400x400				•	•	•	
	•	•	•	•	•	•	•
	•	•	•	•	•	•	•



KWC-No.	Finish
26.000.200.000	all chrome
D 200x200	

Shower heads Additional accessories

- Shower head KWC PIATTO Q
- made of plastic
 - with ball joint
 - cleaning-friendly faceplate
 - spaJet
 - connecting thread 1/2"
 - To be ordered separately:
 - Bracket



KWC-No.	Finish
26.000.201.000	all chrome
D 240x240	
26.000.202.000	all chrome
D 300x300	
26.000.203.000	all chrome
D 400x400	


Shower heads Additional accessories

- Shower head KWC PIATTO Q
- made of stainless steel
 - with ball joint
 - cleaning-friendly faceplate
 - spaJet
 - connecting thread 1/2"
 - To be ordered separately:
 - Bracket



Spray: Flow rate 12 l/min (3 bar)
Spray: Acoustic group I

Spray: Flow rate 12 l/min (3 bar)
Spray: Acoustic group I




KWC-No.	Finish
26.000.210.000	all chrome
D 200	

Shower heads
Additional accessories



- Shower head KWC PIATTO R
- made of plastic
 - with ball joint
 - cleaning-friendly faceplate
 - spaJet
 - connecting thread 1/2"
 - To be ordered separately:
 - Bracket

Spray: Flow rate 12 l/min (3 bar)
Spray: Acoustic group I




KWC-No.	Finish
26.000.211.000	all chrome
D 240	
26.000.212.000	all chrome
D 300	
26.000.213.000	all chrome
D 400	

Shower heads
Additional accessories



- Shower head KWC PIATTO R
- made of stainless steel
 - with ball joint
 - cleaning-friendly faceplate
 - spaJet
 - connecting thread 1/2"
 - To be ordered separately:
 - Bracket

Spray: Flow rate 12 l/min (3 bar)
Spray: Acoustic group I




KWC-No.

26.000.220.000

Finish

all chrome



KWC-No.

26.000.221.000

Finish

all chrome

Shower heads

Additional accessories

Shower head KWC FIT five

- made of plastic
- cleaning-friendly faceplate
- fitJet
 - five different setting options
- connecting thread 1/2"
- To be ordered separately:
 - Bracket



Shower heads

Additional accessories


Shower head KWC FIT mono

- made of plastic
- cleaning-friendly faceplate
- fitJet
- connecting thread 1/2"
- To be ordered separately:
 - Bracket



Spray: Flow rate 12 l/min (3 bar)
Spray: Acoustic group I

Spray: Flow rate 12 l/min (3 bar)
Spray: Acoustic group I



KWC-No.

Finish

26.000.800.000


all chrome

L 352

Shower arms, Additional accessories

Shower arm

- with cutcheon
- suitable for KWC shower heads up to $\varnothing 240$ mm / 240 mm x 240 mm
- connecting thread 1/2"



KWC-No.

Finish

26.000.801.000


all chrome

L 352

Shower arms, Additional accessories

Shower arm

- with cutcheon
- suitable for KWC shower heads up to $\varnothing 240$ mm / 240 mm x 240 mm
- connecting thread 1/2"



KWC-No.

Finish

26.000.802.000

all chrome

L 352

Shower arms, Additional accessories

Shower arm

- with cutcheon
- suitable for KWC shower heads up to $\varnothing 240$ mm / 240 mm x 240 mm
- connecting thread 1/2"



KWC-No.

Finish

26.000.803.000


all chrome

L 352

Shower arms, Additional accessories

Shower arm

- with cutcheon
- suitable for KWC shower heads up to $\varnothing 240$ mm / 240 mm x 240 mm
- connecting thread 1/2"




KWC-No. **26.000.810.000**
L 352

Finish: all chrome

Shower arms, Additional accessories

- Shower arm
- with cutcheon
 - suitable for KWC shower heads up to $\varnothing 240$ mm / 240 mm x 240 mm
 - connecting thread $\frac{1}{2}$ "




KWC-No. **26.000.813.000**
L 352

Finish: all chrome

Shower arms, Additional accessories

- Shower arm
- with cutcheon
 - suitable for KWC shower heads up to $\varnothing 240$ mm / 240 mm x 240 mm
 - connecting thread $\frac{1}{2}$ "




KWC-No. **26.000.811.000**
L 385

Finish: all chrome

Shower arms, Additional accessories

- Shower arm
- with cutcheon
 - suitable for all KWC shower heads
 - connecting thread $\frac{1}{2}$ "




KWC-No. **26.000.812.000**
L 485

Finish: all chrome

Shower arms, Additional accessories


- Shower arm
- with cutcheon
 - suitable for all KWC shower heads
 - connecting thread $\frac{1}{2}$ "



KWC-No.	Finish
26.000.820.000	all chrome
L 125	
26.000.821.000	all chrome
L 225	
26.000.822.000	all chrome
L 325	

Shower arms, Additional accessories

- Shower arm
- with cutcheon
 - suitable for all KWC shower heads
 - connecting thread 1/2"



KWC-No.	Finish
26.000.823.000	all chrome
L 125	
26.000.824.000	all chrome
L 225	
26.000.825.000	all chrome
L 325	

Shower arms, Additional accessories

- Shower arm
- with cutcheon
 - suitable for all KWC shower heads
 - connecting thread 1/2"

KWC Shower systems

For retrofitting or as a renovation solution

KWC shower systems can be configured to suit individual preferences and requirements.

Replacement solution



- Can be connected to new or existing faucets
- To upgrade the existing installation

Exposed solution



- Connection to existing wall connections (exposed arrangement)
- Including KWC thermostat with outlet at the top


Concealed solution



- Connection to concealed faucet


KWC shower configurator – the online planning tool

Design your ideal KWC shower system online: it's no problem at all with the easy-to-use shower configurator! This professional tool is designed to be extremely user-friendly, and guides you towards your goal – step by step.

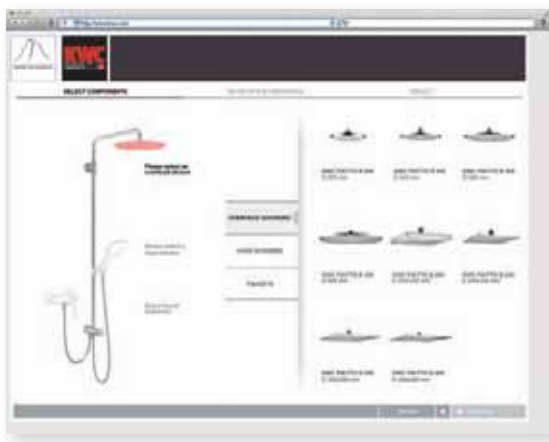

Numerous configuration options

Which configurations are possible in your bathroom? The only input the KWC shower configurator needs from you is a few dimensions, together with the desired installation and spatial details, which you can enter directly online in the corresponding screen.

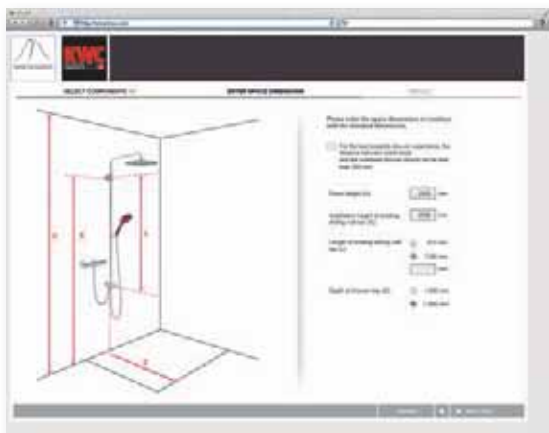

The result: material selection with dimensioned drawings

If the desired configuration is feasible, the KWC shower configurator puts together a comprehensive material selection for you with dimensioned drawings, which you can download and print.

www.kwc.com
www.showerculture.com

Tailor-made individual solutions

Integrated concepts to suit all tastes and areas of application

Shower heads



Water-bearing sliding wall bar

different reaches (A 300 / A 400)

different lengths (L 612 / L 1100), can be shortened

Hand showers



Interfaces (water)




Wall bracket for connection to exposed faucet




Connection to thermostat with outlet at the top



Wall bracket for connection to concealed faucet

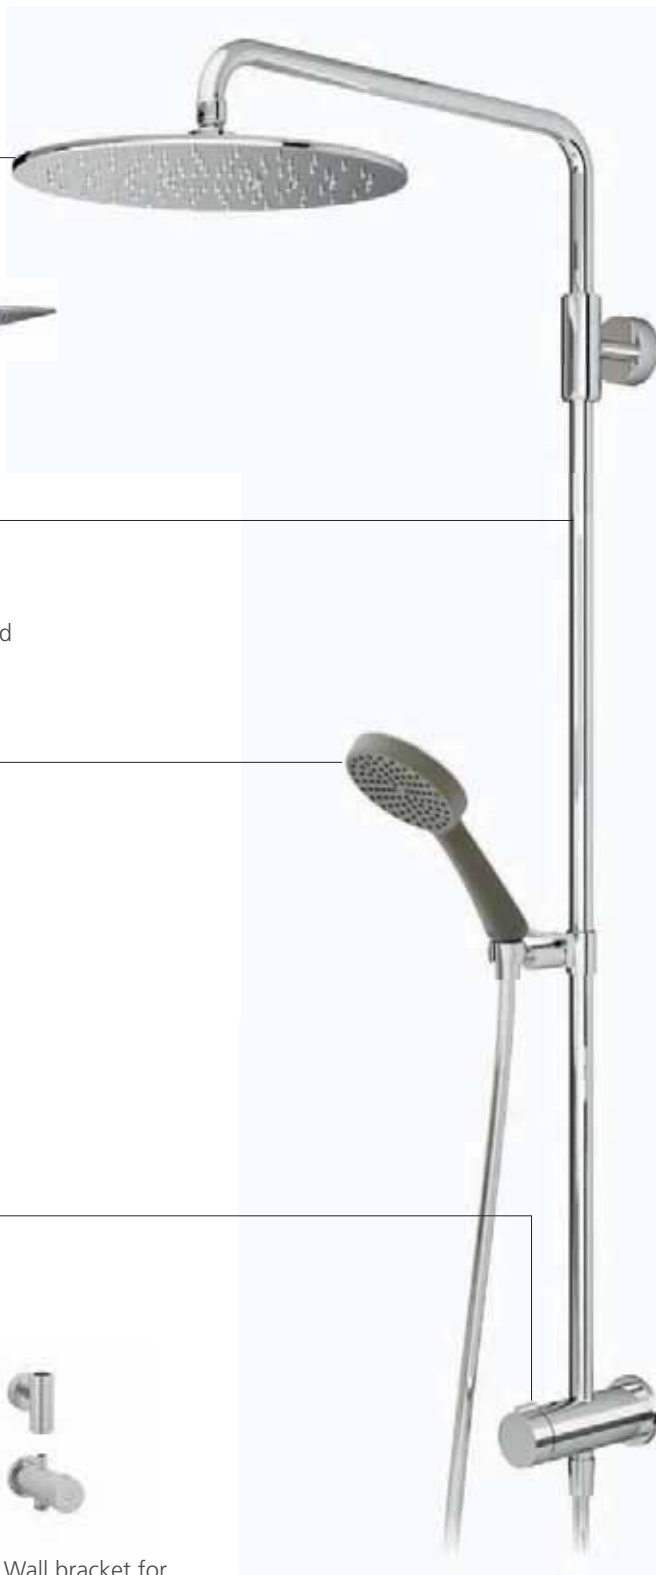




KWC-No.

Finish

26.196.213.000

all chrome

AD 150 +/- 15 mm, A 300, with hand shower and hose



KWC-No.

Finish

26.156.213.000

all chrome

AD 150 +/- 15 mm, A 300, with hand shower and hose

Complete systems Thermostat


Shower system KWC AVA

- smartControl - water-saving device
- touchControl - the body of the mixer does not become hot
- touchControl - hand shower does not become hot
- swiveling bracket, shower head with ball joint
- hotControl - temperature handle with safety stop button 38°C
- turning handle to control flow and for diverter
- KWC ball joint bracket, elevation adjustment lockable
- tube diameter 20 mm
- intrinsically safe against backflow
- easy to install on existing connections
- thermostatic precision control unit
 - constant water temperature (even when mains pressure fluctuates)
 - fast response
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44
- Scope of delivery:
 - thermostat incl. wall connections with outlet (top) for water-bearing sliding wall bar
 - hand shower KWC BOSSANOVA mono 26.000.111.040
 - shower hose 1800 mm, plastic 26.001.014.000
 - shower head KWC PIATTO Q240
 - sliding wall bar kit 26.004.003.000
 - shower guide rod holder (top), for connecting guide rod and spray arm

Complete systems Thermostat

Shower system KWC ONO

- smartControl - water-saving device
- touchControl - the body of the mixer does not become hot
- touchControl - the water-bearing sliding wall bar does not become hot, can be shortened to any individual length as required
- touchControl - hand shower does not become hot
- swiveling bracket, shower head with ball joint
- hotControl - temperature handle with safety stop button 38°C
- turning handle to control flow and for diverter
- KWC ball joint bracket, elevation adjustment lockable
- tube diameter 20 mm
- intrinsically safe against backflow
- easy to install on existing connections
- thermostatic precision control unit
 - constant water temperature (even when mains pressure fluctuates)
 - fast response
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44
- Scope of delivery:
 - thermostat incl. wall connections with outlet (top) for water-bearing sliding wall bar
 - hand shower KWC ELY mono 26.000.120.000
 - shower hose 1800 mm, plastic 26.001.014.000
 - shower head KWC PIATTO R240
 - sliding wall bar kit 26.004.003.000
 - shower guide rod holder (top), for connecting guide rod and spray arm

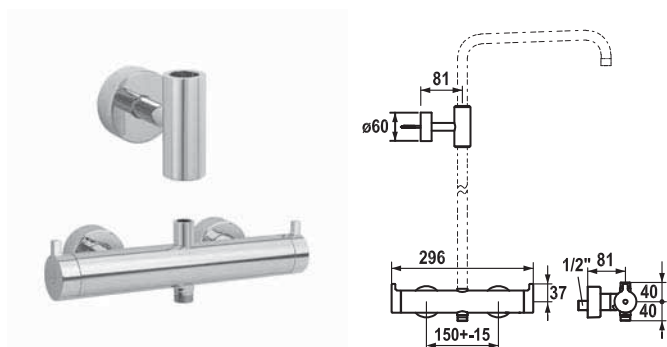


KWC-No.

26.195.540.000

AD 150 +/- 15 mm

Finish

all chrome

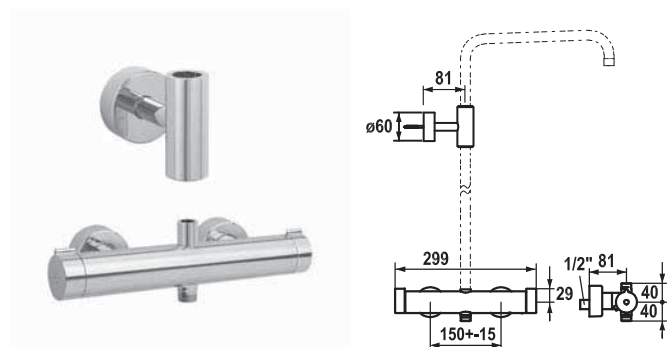

KWC-No.

26.155.540.000

AD 150 +/- 15 mm

Finish

all chrome

Shower Components Thermostat


Thermostat KWC AVA

- with outlet (top) for water-bearing sliding wall bar
- suitable for connection / fixing of water-bearing sliding wall bar kit
- smartControl - water-saving device
- touchControl - the body of the mixer does not become hot
- hotControl - temperature handle with safety stop button 38°C
- turning handle to control flow and for diverter
- intrinsically safe against backflow
- thermostatic precision control unit
 - constant water temperature (even when mains pressure fluctuates)
 - fast response
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44
- Scope of delivery:
 - shower hose 1800 mm, plastic 26.001.014.000
 - shower guide rod holder (top), for connecting guide rod and spray arm
- To be ordered separately:
 - water-bearing sliding wall bar kit
 - 26.004.001.000
 - 26.004.002.000
 - 26.004.003.000
 - 26.004.004.000
 - hand shower KWC BOSSANOVA or KWC ELY
 - shower head KWC PIATTO
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Shower Components Thermostat

Thermostat KWC ONO

- with outlet (top) for water-bearing sliding wall bar
- suitable for connection / fixing of water-bearing sliding wall bar kit
- smartControl - water-saving device
- touchControl - the body of the mixer does not become hot
- hotControl - temperature handle with safety stop button 38°C
- turning handle to control flow and for diverter
- intrinsically safe against backflow
- thermostatic precision control unit
 - constant water temperature (even when mains pressure fluctuates)
 - fast response
- concealed wall connections 1/2" x 3/4", without shut-off valve L 46 eccentric 7.5 mm, K.30.89.05.000.44
- Scope of delivery:
 - shower hose 1800 mm, plastic 26.001.014.000
 - shower guide rod holder (top), for connecting guide rod and spray arm
- To be ordered separately:
 - water-bearing sliding wall bar kit
 - 26.004.001.000
 - 26.004.002.000
 - 26.004.003.000
 - 26.004.004.000
 - hand shower KWC BOSSANOVA or KWC ELY
 - shower head KWC PIATTO
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.




KWC-No.

26.004.100.000

Finish

all chrome



KWC-No.

26.004.110.000

Finish

all chrome

Components


Diverter for shower system surface-mounted

- suitable for connection to surface-mounted mixer / fixing of water-bearing sliding wall bar kit
- turning handle to control flow and for diverter
- Scope of delivery:
 - shower hose 1800 mm, plastic 26.001.014.000 and 1000 mm (can be shortened), plastic 26.001.019.000
 - shower guide rod holder (top), for connecting guide rod and spray arm
- To be ordered separately:
 - water-bearing sliding wall bar kit
 - 26.004.001.000
 - 26.004.002.000
 - 26.004.003.000
 - 26.004.004.000
 - hand shower KWC BOSSANOVA or KWC ELY
 - shower head KWC PIATTO
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Components

Diverter for shower system concealed

- suitable for connection to concealed unit / fixing of water-bearing sliding wall bar kit
- turning handle to control flow and for diverter
- Scope of delivery:
 - shower hose 1800 mm, plastic 26.001.014.000
 - shower guide rod holder (top), for connecting guide rod and spray arm
- To be ordered separately:
 - water-bearing sliding wall bar kit
 - 26.004.001.000
 - 26.004.002.000
 - 26.004.003.000
 - 26.004.004.000
 - hand shower KWC BOSSANOVA or KWC ELY
 - shower head KWC PIATTO
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

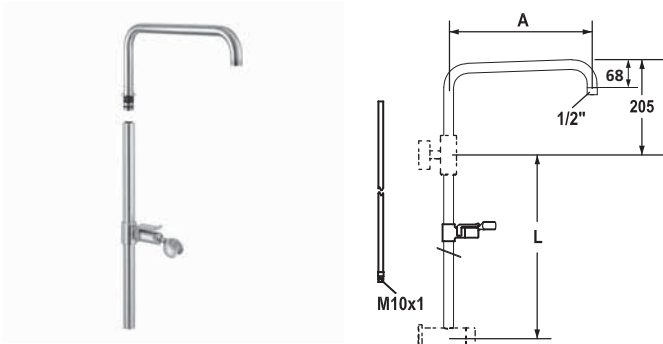


KWC-No.	Finish
26.004.001.000 A 300, L 612	all chrome
26.004.002.000 A 400, L 612	all chrome
26.004.003.000 A 300, L 1100	all chrome
26.004.004.000 A 400, L 1100	all chrome

Components

Sliding wall bar kit

- water-bearing (pipe-in-pipe system)
- incl. shower arm, swiveling
- suitable for connection / fixing to:
 - thermostat with outlet (top) for water-bearing sliding wall bar
 - sliding wall bar holder (bottom)
- touchControl - the water-bearing sliding wall bar does not become hot, can be shortened to any individual length as required
- KWC ball joint bracket, elevation adjustment lockable
- tube diameter 20 mm
- Go to www.kwc.com for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.



KWC-No.

26.000.621.000


Finish

all chrome

Shower brackets

Shower bracket

- non-adjustable
- Suitable for:
 - all hand showers



KWC-No.

26.000.620.000

Finish

all chrome

Shower brackets

Shower bracket

- non-adjustable
- Suitable for:
 - all hand showers



KWC-No.

26.000.622.000

Finish

all chrome

Shower brackets

Shower bracket

- made of plastic
- non-adjustable
- Suitable for:
 - all hand showers



KWC-No.

26.000.623.000


Finish

all chrome

Shower brackets

Shower bracket

- adjustable
- Suitable for:
 - all hand showers



KWC-No.

Finish

K.26.99.01.000

all chrome

L 612

K.26.99.02.000


all chrome

L 1100

Sliding wall bars

Sliding wall bar KWC FIT

- KWC ball joint bracket, elevation adjustment lockable
- tube diameter 18 mm



KWC-No.

Finish

K.26.99.05.000

all chrome

L 612

K.26.99.06.000


all chrome

L 1100

Sliding wall bars

Sliding wall bar KWC FIT

- corner model
- KWC ball joint bracket, elevation adjustment lockable
- tube diameter 18 mm



KWC-No.

Finish

26.000.502.000

all chrome

L 612

26.000.503.000


all chrome

L 1100

Sliding wall bars

Sliding wall bar

- KWC ball joint bracket, elevation adjustment lockable
- tube diameter 18 mm



KWC-No.

Finish

26.000.504.000

all chrome

L 612

26.000.505.000


all chrome

L 1100


Sliding wall bars

Sliding wall bar

- KWC ball joint bracket, elevation adjustment lockable
- tube diameter 18 mm



KWC-No.	Finish
26.003.201.000	all chrome
L 612	
26.003.202.000	all chrome
L 1100	



KWC-No.	Finish
26.003.301.000	all chrome
L 612	
26.003.302.000	all chrome
L 1100	

Sliding wall bar kits



Sliding wall bar kit KWC BOSSANOVA mono


- touchControl - hand shower does not become hot
- angled hand shower hose connection, straight hose position
- ergoSkin - ergonomic grip, pleasant surface
- KWC ball joint bracket, elevation adjustment lockable
- tube diameter 18 mm
- cleaning-friendly faceplate
- fitJet
- Scope of delivery:
 - hand shower KWC BOSSANOVA mono 26.000.111.040
 - shower hose 1800 mm, plastic 26.001.014.000
 - sliding wall bar K.26.99.01.000

Sliding wall bar kits



Sliding wall bar kit KWC BOSSANOVA duo

- touchControl - hand shower does not become hot
- angled hand shower hose connection, straight hose position
- ergoSkin - ergonomic grip, pleasant surface
- KWC ball joint bracket, elevation adjustment lockable
- tube diameter 18 mm
- cleaning-friendly faceplate
- fitJet & spaJet
- Scope of delivery:
 - hand shower KWC BOSSANOVA duo 26.000.112.040
 - shower hose 1800 mm, plastic 26.001.014.000
 - sliding wall bar K.26.99.01.000



KWC-No.	Finish
26.003.101.000	all chrome
L 612	
26.003.102.000	all chrome
L 1100	


Sliding wall bar kits



Sliding wall bar kit KWC ELY mono

- touchControl - hand shower does not become hot
- hand shower head angled, straight hose position
- KWC ball joint bracket, elevation adjustment lockable
- tube diameter 18 mm
- cleaning-friendly faceplate
- fitJet
- Scope of delivery:
 - hand shower KWC ELY mono 26.000.120.000
 - shower hose 1800 mm, plastic 26.001.014.000
 - sliding wall bar K.26.99.01.000

Spray: Flow rate 12 l/min (3 bar)
 Spray: Acoustic group I



KWC-No.

26.000.610.000


Finish

all chrome

Hose connections

Hose connection

- intrinsically safe against backflow
- connecting thread 1/2"



KWC-No.

26.000.611.000


Finish

all chrome

Hose connections

Hose connection

- intrinsically safe against backflow
- connecting thread 1/2"



KWC-No.

26.000.612.000


Finish

all chrome

Hose connections

Hose connection

- with integrated shower bracket
- intrinsically safe against backflow
- connecting thread 1/2"



KWC-No.

26.000.613.000


Finish

all chrome

Hose connections

Hose connection

- with integrated shower bracket
- intrinsically safe against backflow
- connecting thread 1/2"



KWC-No.

26.000.614.000


Finish

all chrome

Hose connections

Hose connection

▪ connecting thread 1/2"



KWC-No.

Finish

26.001.014.000

all chrome

L 1800

26.001.012.000


all chrome

L 1250

Shower hoses

Shower hose

- secure against twisting: rotatable (long) cone
- made of plastic
- connecting thread 1/2"



KWC-No.

Finish

26.001.019.000

all chrome

L 1000

Shower hoses


Shower hose

- secure against twisting: rotatable (long) cone
- can be shortened
- made of plastic
- connecting thread 1/2"



KWC Automatic faucets

Automatic faucets	
KWC LIDAR	192
KWC TRONIC	194
KWC IQUA	195




KWC-No. **12.671.461.000FL** Finish all chrome
A 120, flexible connection hoses, battery

Basin non-contact

- Automatic
- infrared sensor
 - without mixing
 - microprocessor-control
 - flow time adjustable 1 - 10 seconds (1 second factory setting)
 - short time off (cleaning) activatable
 - 24-hour-hygiene flushing activatable
 - fixed spout
 - Neoperl® cascade®
 - electrovalve
 - flexible connection hoses 3/8"
 - fastening by means of stud bolt 2x M6 x 1
 - mounting hole size Ø35 mm
 - Scope of delivery:
 - battery 6 V Lithium CRP2
 - lifespan at 100 circuits/day: 4 years

Flow rate 7 l/min (3 bar)
Acoustic group I




KWC-No. **12.671.471.000FL** Finish all chrome
A 120, flexible connection hoses, mains receiver

Basin non-contact

- Automatic
- infrared sensor
 - without mixing
 - microprocessor-control
 - flow time adjustable 1 - 10 seconds (1 second factory setting)
 - short time off (cleaning) activatable
 - 24-hour-hygiene flushing activatable
 - fixed spout
 - Neoperl® cascade®
 - electrovalve
 - flexible connection hoses 3/8"
 - fastening by means of stud bolt 2x M6 x 1
 - mounting hole size Ø35 mm
 - Scope of delivery:
 - mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate 7 l/min (3 bar)
Acoustic group I




KWC-No. **12.671.491.000FL** Finish all chrome
A 120, flexible connection hoses, battery

Basin non-contact

- Automatic
- infrared sensor
 - with mixing
 - microprocessor-control
 - flow time adjustable 1 - 10 seconds (1 second factory setting)
 - short time off (cleaning) activatable
 - 24-hour-hygiene flushing activatable
 - fixed spout
 - Neoperl® cascade®
 - electrovalve
 - flexible connection hoses 3/8"
 - fastening by means of stud bolt 2x M6 x 1
 - mounting hole size Ø35 mm
 - Scope of delivery:
 - battery 6 V Lithium CRP2
 - lifespan at 100 circuits/day: 4 years

Flow rate 7 l/min (3 bar)
Acoustic group I




KWC-No. **12.671.501.000FL** Finish all chrome
A 120, flexible connection hoses, mains receiver

Basin non-contact

- Automatic
- infrared sensor
 - with mixing
 - microprocessor-control
 - flow time adjustable 1 - 10 seconds (1 second factory setting)
 - short time off (cleaning) activatable
 - 24-hour-hygiene flushing activatable
 - fixed spout
 - Neoperl® cascade®
 - electrovalve
 - flexible connection hoses 3/8"
 - fastening by means of stud bolt 2x M6 x 1
 - mounting hole size Ø35 mm
 - Scope of delivery:
 - mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate 7 l/min (3 bar)
Acoustic group I









KWC-No. **11.602.053.000** Finish all chrome
AD 150 +/- 15 mm, A 200, battery


Basin non-contact

Automatic

- infrared sensor
- microprocessor-control
 - flow time adjustable (1 second factory setting)
 - short time off (cleaning) activatable
 - continuous water flow (filling) activatable
 - sensor sensitivity adjustable permanent, automatic self-calibration
 - 24-hour-hygiene flushing activatable
- intrinsically safe against backflow
- fixed spout
 - Neoperl® cascade®
- KWC cartridge L 40 - electronic
 - with ceramic discs
 - temperature fixation or temperature limitation
- wall connections 1/2" x 3/4", with shut-off valve L 40 eccentric 7.5 mm, K.30.80.06.000.44
- Scope of delivery:
 - battery 6 V Lithium CRP2
 - lifespan at 100 circuits/day: 4 years

Flow rate 7 l/min (3 bar)
Acoustic group I





KWC-No.

Finish

K.12.JB.52.M000B23

all chrome


A 140, flexible connection hoses, without pop-up valve, battery, Basic

Basin non-contact

Automatic

- infrared sensor A20
- without mixing
 - for cold or mixed water supply
- Basic: counter-sunk iqua click
- microprocessor-control
 - flow time adjustable (1 second factory setting)
 - short time off (cleaning) activatable
 - continuous water flow (filling) activatable
 - sensor sensitivity adjustable permanent, automatic self-calibration
 - 12- or 24-hour-hygiene flushing activatable
- fixed spout
 - Neoperl® cascade®
- electrovalve
- flexible connection hose 3/8"
- fastening by means of stud bolt M8 x 1
- mounting hole size ø35 mm
- Scope of delivery:
 - battery 6 V Lithium 2 CR5
 - lifespan at 100 circuits/day: 4 years

Flow rate 5 l/min (3 bar)
Acoustic group I



KWC-No.

Finish

K.12.JB.52.000B23

all chrome


A 140, flexible connection hoses, without pop-up valve, battery, Basic

Basin non-contact

Automatic

- infrared sensor A10
- with mixing
 - temperature limiter adjustable
- Basic: counter-sunk iqua click
- microprocessor-control
 - flow time adjustable (1 second factory setting)
 - short time off (cleaning) activatable
 - continuous water flow (filling) activatable
 - sensor sensitivity adjustable permanent, automatic self-calibration
 - 12- or 24-hour-hygiene flushing activatable
- fixed spout
 - Neoperl® cascade®
- electrovalve
- flexible connection hoses 3/8"
- fastening by means of stud bolt M8 x 1
- mounting hole size ø35 mm
- Scope of delivery:
 - battery 6 V Lithium 2 CR5
 - lifespan at 100 circuits/day: 4 years

Flow rate 5 l/min (3 bar)
Acoustic group I



KWC-No.

Finish

K.12.QB.51M000B23

all chrome

A 110, flexible connection hoses, without pop-up valve, battery, Basic

Basin non-contact

Automatic

- infrared sensor L20
- without mixing
 - for cold or mixed water supply
- Basic: counter-sunk iqua-click
- microprocessor-control
 - flow time adjustable (1 second factory setting)
 - short time off (cleaning) activatable
 - continuous water flow (filling) activatable
 - sensor sensitivity adjustable permanent, automatic self-calibration
 - 12- or 24-hour-hygiene flushing activatable
- fixed spout
 - Neoperl® cascade®
- electrovalve
- flexible connection hose $\frac{3}{8}$ "
- fastening by means of stud bolt M8 x 1
- mounting hole size ø35 mm
- Scope of delivery:
 - battery 6 V Lithium CRP2
 - lifespan at 100 circuits/day: 4 years

Flow rate 5 l/min (3 bar)
Acoustic group I



KWC-No.

Finish

K.28.J6.10.102


white

prepared for mains operation

Accessories: public / commercial faucets

Hand dryer HT180

- Overheating protection for heater and motor
- Safety switch-off after 2 minutes of continuous operation
- microprocessor-control
- Scope of delivery:
 - mains operation 230 V / 2300 W

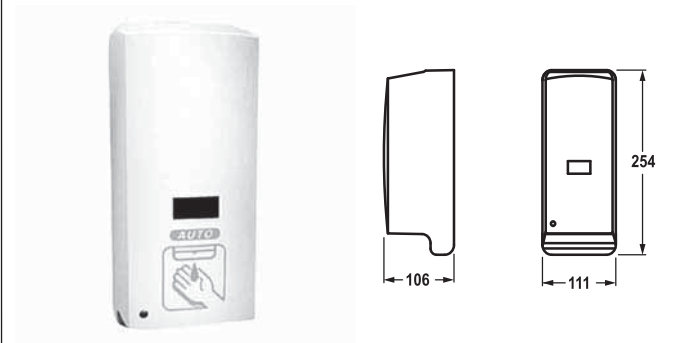

KWC-No.

Finish

K.28.J6.20.102

white

battery

Accessories: public / commercial faucets

Soap dispenser SD80, for liquid soap and disinfectant soap (viscosity 2000-6000 mPa*s, contents 0.8 litre)

- Scope of delivery:
 - battery 1.5 V Alkaline LR14/2BN (3x)
 - lifespan at 20'000 circuits: 2 years

KWC-No.	Page	KWC-No.	Page	KWC-No.	Page
10.021.023.000FL	50	10.501.004.736	61	12.191.051.000FL	96
10.021.023.000LLFL	50	10.501.042.000	57	12.191.052.000FL	97
10.021.033.000FL	51	10.501.042.700	57	12.191.071.000FL	96
10.021.033.000LLFL	52	10.501.102.000	58	12.191.072.000FL	98
10.025.023.000	51	10.501.102.700	58	12.191.093.000FL	99
10.025.033.000	52	10.501.134.000	59	12.191.131.000FL	99
10.061.003.000FL	45	10.501.144.000	60	12.191.141.000FL	99
10.061.004.000FL	45	10.501.154.000	60	12.191.393.000FL	99
10.061.023.000FL	44	10.501.163.736	61	12.198.041.000FL	97
10.061.033.000FL	46	10.501.164.736	61	12.198.042.000FL	98
10.061.043.000FL	44	10.651.022.000FL	27	12.198.051.000FL	97
10.061.053.000FL	46	10.651.032.000FL	31	12.198.052.000FL	98
10.071.023.000FL	53	10.651.122.000FL	28	12.198.131.000FL	100
10.071.023.000LLFL	53	10.652.012.000FL	29	12.198.141.000FL	100
10.071.033.000FL	54	10.652.132.000FL	32	12.281.031.000FL	147
10.071.033.000LLFL	54	10.653.112.000FL	30	12.281.032.000FL	148
10.111.102.000FL	35	11.062.002.000	137	12.281.041.000FL	146
10.111.102.700FL	35	11.062.003.000	137	12.281.042.000FL	148
10.111.103.000FL	35	11.152.033.000	26, 110	12.281.051.000FL	146
10.111.103.700FL	35	11.152.034.000	26, 110	12.281.052.000FL	148
10.121.102.000FL	36	11.192.033.000	15, 100	12.281.071.000FL	147
10.121.102.700FL	36	11.192.034.000	15, 100	12.281.072.000FL	148
10.121.103.000FL	36	11.282.002.000	146	12.288.041.000FL	147
10.121.103.150FL	37	11.282.003.000	146	12.288.042.000FL	149
10.121.103.151FL	37	11.282.004.000	146	12.288.051.000FL	147
10.121.103.700FL	36	11.292.002.000	151	12.288.052.000FL	149
10.151.003.000FL	22	11.292.002.000LL	151	12.291.031.000FL	152
10.151.013.000FL	22	11.292.003.000	151	12.291.032.000FL	154
10.151.023.000FL	23	11.292.003.000LL	151	12.291.041.000FL	152
10.151.023.700FL	23	11.292.004.000	151	12.291.041.000LLFL	153
10.151.033.000FL	23	11.292.004.000LL	151	12.291.042.000FL	153
10.151.033.700FL	23	11.602.053.000	194	12.291.042.000LLFL	154
10.151.102.000FL	24	11.654.003.000	33, 128	12.291.051.000FL	152
10.151.102.700FL	24	11.654.004.000	33, 128	12.291.051.000LLFL	153
10.151.113.000FL	24	12.061.011.000FL	137	12.291.052.000FL	153
10.151.113.700FL	24	12.061.021.000FL	137	12.291.052.000LLFL	154
10.151.413.000FL	18	12.061.031.000FL	139	12.291.071.000FL	152
10.151.413.700FL	18	12.061.032.000FL	140	12.291.072.000FL	154
10.151.423.000FL	19	12.061.041.000FL	138	12.651.021.000FL	123
10.151.423.700FL	19	12.061.042.000FL	140	12.651.031.000FL	126
10.152.322.000FL	25	12.061.051.000FL	138	12.651.032.000FL	127
10.152.413.000FL	18	12.061.052.000FL	140	12.651.132.000FL	127
10.152.423.000FL	20	12.061.071.000FL	139	12.652.011.000FL	124
10.153.423.000FL	21	12.061.072.000FL	140	12.652.012.000FL	125
10.181.002.000FL	10	12.061.092.000FL	142	12.652.122.000FL	125
10.181.003.000FL	10	12.061.102.000FL	143	12.661.403.700FL	49, 158
10.181.012.000FL	11	12.061.372.000FL	141	12.661.403.750FL	49, 158
10.181.992.000FL	11	12.061.382.000FL	142	12.661.413.700FL	49, 158
10.191.003.000FL	12	12.068.011.000FL	138	12.661.413.750FL	49, 158
10.191.023.000FL	13	12.068.021.000FL	138	12.671.461.000FL	192
10.191.033.000FL	13	12.068.041.000FL	139	12.671.471.000FL	192
10.191.103.000FL	12	12.068.042.000FL	141	12.671.491.000FL	193
10.191.113.000FL	14	12.068.051.000FL	139	12.671.501.000FL	193
10.211.023.000FL	43	12.068.052.000FL	141	13.061.041.000FL	143
10.211.033.000FL	43	12.151.042.000FL	109	13.151.041.000FL	111
10.231.013.000FL	16	12.151.052.000FL	109	13.191.041.000FL	101
10.231.013.700FL	17	12.151.093.000FL	109	20.064.400.000	144
10.231.103.000FL	16	12.151.293.000FL	110	20.064.410.000	144
10.231.103.700FL	17	12.151.332.000FL	112	20.064.480.000	145
10.261.002.000FL	41	12.151.342.000FL	112	20.151.094.000	115
10.261.012.000FL	42	12.151.393.000FL	109	20.152.422.000	116
10.261.102.000FL	42	12.151.402.000FL	113	20.152.442.000	116
10.261.432.000FL	41	12.151.412.000FL	113	20.152.503.000	117
10.271.023.700FL	38	12.151.422.000FL	113	20.154.280.000	119
10.271.033.700FL	38	12.151.432.000FL	113	20.154.290.000	119
10.271.033.736FL	38	12.151.442.000FL	113	20.154.480.000	120
10.271.103.700FL	39	12.151.452.000FL	113	20.192.440.000	102
10.271.303.700FL	39	12.151.462.000FL	114	20.192.503.000	103
10.272.123.700FL	40	12.151.472.000FL	114	20.194.480.000	106
10.291.023.000FL	47	12.151.482.000FL	114	20.194.580.000	105
10.291.023.000LLFL	48	12.191.031.000FL	96	20.194.590.000	105
10.291.033.000FL	47	12.191.032.000FL	98	20.282.313.000	149
10.291.033.000LLFL	48	12.191.041.000FL	96	20.292.313.000	155
10.501.003.736	61	12.191.042.000FL	97	20.292.503.000	156

KWC-No.	Page	KWC-No.	Page	KWC-No.	Page
20.294.400.000	157	26.000.623.000	182	K.24.42.61.000C71	81
20.657.023.000	129	26.000.800.000	170	K.24.42.62.000C71	79
20.657.120.000	130	26.000.801.000	170	K.24.42.64.000C71	80
20.657.234.000	131	26.000.802.000	170	K.24.42.70.000C78	76
21.064.400.000	144	26.000.803.000	170	K.24.42.74.000C78	77
21.064.480.000	145	26.000.810.000	171	K.24.42.E1.000C35	71
21.152.030.000	116	26.000.811.000	171	K.24.42.E2.000C35	71
21.152.330.000	116	26.000.812.000	171	K.24.42.K1.000C34	72
21.152.500.000	117	26.000.813.000	171	K.24.42.K3.000C34	72
21.154.240.000	121	26.000.820.000	172	K.24.42.K5.000C34	72
21.154.280.000	119	26.000.821.000	172	K.24.62.14.000B91	91
21.154.480.000	120	26.000.822.000	172	K.24.62.16.000B91	91
21.192.330.000	102	26.000.823.000	172	K.24.62.44.000B87	92
21.192.500.000	103	26.000.824.000	172	K.24.62.46.000B87	92
21.194.480.000	106	26.000.825.000	172	K.25.40.14.000C35	92
21.194.580.000	105	26.001.012.000	188	K.25.40.16.000C35	92
21.194.600.000	107	26.001.014.000	188	K.26.99.01.000	183
21.282.310.000	150	26.001.019.000	188	K.26.99.02.000	183
21.292.310.000	155	26.003.101.000	185	K.26.99.05.000	183
21.292.500.000	156	26.003.102.000	185	K.26.99.06.000	183
21.294.400.000	157	26.003.201.000	184	K.28.J6.10.102	197
21.654.010.000	132	26.003.202.000	184	K.28.J6.20.102	197
21.654.020.000	133	26.003.301.000	184	K.38.93.00.931.34	108, 122
21.654.030.000	134	26.003.302.000	184	K.38.H3.70.931A35	108, 122
24.501.044.000	82	26.004.001.000	181	Z.536.060.000	63
24.501.046.000	82	26.004.002.000	181	Z.536.060.700	63
24.501.054.000	83	26.004.003.000	181	Z.536.062.700	63
24.501.056.000	83	26.004.004.000	181	Z.536.063.000	62
24.501.064.000	82	26.004.100.000	180	Z.536.063.150	62
24.501.066.000	82	26.004.110.000	180	Z.536.063.151	62
24.501.103.000LLFL	91	26.151.073.000	121	Z.536.063.700	62
24.501.104.000LLFL	91	26.155.540.000	179	Z.536.109.000	63
24.501.130.000	86	26.156.213.000	118, 178	Z.536.159.000	62
24.501.144.000	87	26.191.073.000	107	Z.536.178	115
24.501.146.000	87	26.195.540.000	179	Z.536.332.000	63
24.502.164.000	90	26.196.213.000	104, 178	Z.536.351.000	34, 135
24.502.166.000	90	27.150.050.000	122	Z.536.352	136
24.502.194.000	85	27.190.050.000	108	Z.536.405	136
24.502.196.000	85	39.000.510.931	135	Z.536.530.145	93
24.503.114.000	88	39.004.500.931	34, 135	Z.636.183	34, 126, 127, 131
24.503.124.000	89	39.151.400.931	26, 111	Z.636.183	132, 133, 134, 135
24.503.126.000	89	39.152.320.000	121		
24.503.174.000	84	39.193.400.931	15, 101		
24.503.184.000	84	39.990.010.931	108, 122		
26.000.110.040	162	39.990.011.931	108, 122		
26.000.111.040	162	39.999.300.931	159		
26.000.112.040	163	K.10.41.03.000A03	55		
26.000.112.041	163	K.10.41.03.000C03	56		
26.000.112.042	164	K.10.41.23.000A02	55		
26.000.112.043	164	K.11.42.42.000A76	56		
26.000.120.000	165	K.12.JB.52.000B23	195		
26.000.121.000	165	K.12.JB.52M000B23	195		
26.000.200.000	167	K.12.QB.51M000B23	196		
26.000.201.000	167	K.24.40.00.000C35	93		
26.000.202.000	167	K.24.40.60.000C34	75		
26.000.203.000	167	K.24.40.70.000C34	78		
26.000.210.000	168	K.24.41.04.000C07	66		
26.000.211.000	168	K.24.41.06.000C07	66		
26.000.212.000	168	K.24.41.20.000C07	66		
26.000.213.000	168	K.24.41.21.000C07	66		
26.000.220.000	169	K.24.41.24.000C02	72		
26.000.221.000	169	K.24.41.32.000C07	67		
26.000.502.000	183	K.24.41.34.000C07	67		
26.000.503.000	183	K.24.41.60.000C06	73		
26.000.504.000	183	K.24.41.61.000C06	74		
26.000.505.000	183	K.24.41.A2.000C07	67		
26.000.610.000	186	K.24.42.11.000C86	69		
26.000.611.000	186	K.24.42.17.000C86	69		
26.000.612.000	186	K.24.42.19.000C86	70		
26.000.613.000	186	K.24.42.21.000C86	68		
26.000.614.000	187	K.24.42.22.000C74	68		
26.000.620.000	182	K.24.42.24.000C86	68		
26.000.621.000	182	K.24.42.41.000C74	71		
26.000.622.000	182	K.24.42.42.000C74	71		

Information

Color differences on stainless steel surfaces on different parts of a KWC faucet made out of stainless steel, cannot totally be excluded. Different factors may lead to a slight color differentiation.

1. Already a slight difference in material composition may cause stainless steel to reflect light differently (more blue or yellow reflections). These differences in steel compositions still fulfill DIN valid material standards. They may occur within one lot of a steel production unit.
2. Different cooling or production treatment parameters may also cause color surface differentiation.
3. Different surface consistency caused by the production process may as well lead to a different light reflection, so that other colors appear.

Our aim is not to have another surface process to guarantee a 100% stainless steel color consistency. Beside the unique KWC faucet design we would like to keep a puristic surface finish of natural stainless steel in match with our design philosophy.

By keeping production tolerances at a narrow level, we try to keep slight stainless steel surface color differentiation as little as possible. But we cannot exclude them totally. As with upper class wooden furniture, where a slight color differentiation is accepted as well on the surface, it has to be accepted that high quality faucets made by our standards may have slight color differences on their surfaces.

Operating Data

Minimal operating pressure	1 bar (15 PSI)
Ideal operating pressure	3 bar (45 PSI)
Maximal operating pressure	5 bar (70 PSI)
Equal pressures are recommended	
Maximal hotwater temperature	70°C (180°F)

Attention:

Before installation, flush pipes thoroughly!

For further information refer to our detailed sales literature.

Damages on the faucet resulting from incorrect handling are excluded from the manufacturers warranty!



General conditions of sale and delivery

General conditions

All our quotations, sales and deliveries shall be subject to the following conditions exclusively, even if the customer expressly specifies otherwise. With the acceptance of our confirmation of order or the delivery of our goods, the customer declares his acceptance of our terms and conditions. Silence on our part as regards the customer's terms and conditions shall not constitute any acknowledgement of, or consent to, the customer's terms and conditions under any circumstances. All quotations are without obligation.

Supplementary agreements and any other informal commitments need to be confirmed in writing by our Head Office in every case. None of the information contained in our catalogues is binding. This also applies to illustrations, weights, measurements and performance data. We reserve the right to alter specifications without notice.

1. Prices and sales tax

The prices and conditions which will apply are those in effect at the date of delivery. The quoted prices for our product range are EX WORKS, incl. packaging, not insured unless otherwise expressly and separately agreed. At the time valid Incoterms shall apply. All prices shall be exclusive of Value Added Tax, which is shown separately in our invoices.

In the case of inter-company deliveries, the purchaser shall give us an undertaking that the goods are being procured for his own company and are subject to the tax regulations applicable in his country. Prices are subject to change without notice.

2. Delivery and acceptance

Quoted delivery periods are approximations. If circumstances arise for which we are not responsible, e.g. a delay occasioned by delivery problems on the part of our subcontractors, the delivery period shall be extended accordingly.

The delivery period shall also be appropriately extended in the event of industrial action, particularly strikes and lockouts. In the event of a resultant delay in delivery on our part, the customer shall not be entitled to any claims or cancellation of the transaction.

3. Right of the supplier to withdraw

In the event of a serious deterioration in the customer's business, particularly financial circumstances, stoppage of payments, winding-up or transfer of the business or his death or similar, or if the customer pledges stock, receivables or the purchased goods, or orders them as a security for other creditors, the supplier shall be entitled to demand security and to rescind his obligation to supply if the security is inadequate, and to demand compensation on grounds of nonfulfilment. In the event that we are prevented from manufacturing the ordered goods due to circumstances for which we are not to blame, we reserve the right to withdraw from the contract, wholly or partially, without the client being thereby entitled to make any claim whatsoever for compensation, subsequent delivery or withdrawal from the contract.

4. Packing, transport, carriage charges, small order supplement and transfer of risk

We reserve the right to choose the type of packaging used. Cardboard, paper and plastic packaging will not be taken back but must be disposed of by the receiver of the goods. Pallets, wire-mesh box pallets and other usable containers may be returned to us, carriage paid, within three months. Deliveries by post and express services will be charged at cost. If a carriage paid delivery is agreed, the supplier shall be entitled to choose the method of transport employed. For consignments to third parties, an adequate supplement of a percentage of the value of the goods will be charged.

All risks shall be transferred to the customer when the goods leave our factory/depot or are made available to the customer at our factory/depot.

5. Terms of payment

Our invoices are payable within 30 days net in Swiss Francs or Euro after receipt of invoice unless otherwise expressly and separately agreed. In the event of delays in payment, the customer shall without further reminder be liable to pay to KWC AG default interest at a rate of 2% above the relevant discount rate of the National Bank of Switzerland. As long as older invoices remain unpaid, no entitlement to discount shall exist on the payment of new invoices. Bills of exchange shall not be accepted. If payment is made by cheque or other form of documentary remittance, the charges therefore shall be borne by the customer. If the customer is late in making a payment or his financial situation deteriorates markedly after the conclusion of the contract, all debts shall immediately become due for settlement. The customer may only offset these with uncontested or legally established counter-claims. The punctuality of payments, or otherwise, is determined by the date on which the funds are received by us.

6. Retention of title

We shall retain title to the goods supplied until all the debts due to us and incurred as a result of the business relationship have been settled in full, irrespective of the legal justification therefore. As far as such retention of title has to be recorded in public registers, the customer undertakes to issue all statements legally due for

this purpose upon the supplier's first request. The customer shall be entitled to process our products or to use them with other products within the scope of his regular business operations. As a surety against our aforesaid entitlements, we shall acquire co-ownership of the objects resulting from the processing or combined use of our products, the said co-ownership being assigned to us by the customer coincidentally with the acceptance of these Conditions of Sale. The customer shall be required to keep the objects subject to our co-ownership at no charge to us. The amount of our share of co-ownership shall be determined in accordance with the value of our product relative to the value of the object resulting from its processing or combined use by the customer.

We grant our customers the right of resale in the normal course of business, subject to revocation. The said right shall be withdrawn in the event of a suspension of payments. With the acceptance of these Conditions of Sale, the customer shall assign to us all the debts and additional rights accruing to him from the resale. The assigned debts shall serve as a security for all our claims. The customer shall be entitled to collect the assigned debts, provided we have not revoked this authorisation. The authorisation to collect debts shall be withdrawn, even without any express revocation, if the customer suspends his own payments. If we so request, the customer shall inform us in writing and without delay as to whom he has resold the goods and the debts due to him as a result of the resale, and furnish us with certified documents of transfer of the debts at his expense. The customer shall not be entitled to any other provisions in respect of the objects to which we retain title or of which we hold co-ownership, or in respect of any debts assigned to us. The customer shall notify us without delay of any attachments or other legal impairments relating to objects belonging to us, either wholly or partially.

We shall be entitled at any time to call for the return of goods belonging to us if the customer falls into arrears on a payment or if his financial situation deteriorates to a marked extent. If we enforce this right, withdrawal from the contract shall only arise if we expressly declare the same, irrespective of any other mandatory official regulations. If the value of the securities assigned to us exceeds our receivables and entitlements to redemption by more than 20 %, we shall, at the customer's request, release securities to an amount to be decided by us. Samples and drawings shall remain our property, even if the customer bears the costs, or a proportion of the costs, thereof.

7. Returns

Goods may not be returned without our prior consent. Failing this, returned goods shall not be accepted. In the case of returns, we shall be entitled to levy a processing charge according to our goodwill procedure. The costs of any reconditioning required shall be invoiced separately. If goods which have been delivered carriage paid are subsequently returned by the customer, the costs of the initial delivery shall be deducted from the credit note.

8. Warranty and Liability

We guarantee the perfect, functioning of our products provided they are installed correctly and in accordance with their intended purpose. In the event of proven defects in material or workmanship we shall provide full replacement of materials. We shall not be liable for any further damage, particularly as a result of improper handling, overloading or natural wear and tear. This shall apply in particular to surface damage caused by the use of incorrectly used, abrasive or aggressive cleaning agents. Our warranty and liability in respect of materials not manufactured by us shall be restricted to the warranty and liability provided for in the conditions of sale or our subcontracted suppliers.

The warranty period shall be 2 years from the date of invoice of the defective fitting. If we manufacture goods to a customer's specification, he shall be wholly responsible for ensuring that no patents or other third party rights are infringed. Any complaints concerning the weight, quantity or quality of the goods shall be notified in writing immediately after their discovery and, in any case, one week at the latest after receipt of the consignment. If the complaint proves to be justified, a replacement consignment shall be delivered free of charge and carriage paid to the original destination; in the event of quality defects, however, this shall only apply if the faulty parts are returned. Any further claims for replacements or abatement or compensation for indirect and/or direct damages shall be excluded, unless we are unable to effect a re-delivery or are guilty of gross negligence. The goods must still be in the condition in which they were delivered. For goods which have been used, the warranty terms agreed by us with suissetec (Schweizerisch-, Lichtensteinischer Gebäudetechnikverband) shall apply.



9. Place of fulfilment, court of jurisdiction, obligations imposed by contracts

The place of fulfilment for all the obligations arising from the contract is the place in which the supplier's premises are located. The court of jurisdiction for both parties is the suppliers domicile.

The contractual relationship is subject to the material laws of Switzerland. Should any provision of the contract be or become partly or entirely invalid, the validity of the remaining provisions of the contract shall not be affected. The invalid provisions are replaced by a valid rule, which attains the parties economic intent and purpose with regard to the invalid provision. The same shall apply in the event of any gaps of the contract. The Swiss original of the "Conditions of Sale and Delivery" is authoritative.



KWC AG | Hauptstrasse 57 | CH-5726 Unterkulm | Phone +41 62 768 68 68 | www.kwc.com



820528 04/2013